



ALUMINIUM RADIATORS

An aluminium radiator conserves a lot of energy. It conducts heat up to four times more efficiently than other radiators. It brings a room to temperature with up to five times less water than other radiators. It works excellently in **low temperature systems** such as solar water heaters and condensation boilers.

It also scores well in terms of its sustainability because aluminium is **100% recyclable** and can be endlessly reused, while preserving its specific properties.

Aluminium is particularly practical. It is **three times lighter than steel.**

Vasco aluminium radiators can therefore be easily fixed to any wall, require little space and are easy to install. Furthermore aluminium is rust free. Ideal for a humid environment such as the bathroom and is easy to maintain.

ALUMINIUM RADIATORS	
BEAMS	124
BRYCE	130
ALU-ZEN	136
ZAROS	139



COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in collection Pure Grey
- Extensive colour chart see p. 10

SPECIAL

- Composed out of 1 vertical aluminium profile (width 150 mm)
- Protection against internal corrosion: protecting product Protect X100

BRACKETS

- Wall brackets standard (discretely eliminated)

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C
- **Integrated connection (valve set) (lockable) (the central heating pipes should be connected directly to this)**

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 146

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (built-in thermostat box, see p. 359)
- ✗ Integrated valve
- Connections: ¾" Euro cones
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**
- **Attention: must be used in combination with the built-in thermostat box.**

PROTECT X100*

Ref. nr. 11FH55064

price € 89


* 1 bottle (1 litre) per 100 litres installation water

BEAMS MONO

Architectural freedom with aluminium

Vasco have a tradition for technical excellence, enabling them to continually develop new and exciting products. These designer radiators are characterised by their vertical aluminium sections (150 mm wide), and are the most minimalistic design ever developed by Vasco. The design completely conceals the collector, making the valve set invisible and also integrates the suspensions.

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 129

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



short towel rail (M301)

ref. nr. see p. 128

price € 135

Other accessories, see p. 128

BUILT-IN THERMOSTAT BOX



ref. nr. 1182 306 0000 0099

price € 409

Fittings, see p. 359

INTEGRATED CONNECTION (VALVE SET) (SQUARE)



Fittings, see p. 359



Delivery time 15 - 30 working days
(transport duration not included)

BEAMS MONO

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

11258 -00 see table below

PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE BEAMS MONO						TECHNICAL DATA						STANDARD COLOUR		OTHER COLOURS			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. BEAMS MONO : 11258																	
11258	0150	1800	0066	YYYY	-0000	-	150	1800	671	351	1,27	8,60	0,47	-	843	11258-09	969
		2000				-	150	2000	734	384	1,27	9,55	0,52	-	888	-	1021
		2200				-	150	2200	795	413	1,28	10,50	0,57	-	951	-	1094

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)

EXPORT. Prices in Euro (excl. VAT)

BEAMS (BEAMS)

VASCO



COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in collection Pure Grey
- Extensive colour chart see p. 10

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 146

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**

PROTECT X100*

Ref. nr. 11FH55064

price € 89


* 1 bottle (1 litre) per 100 litres installation water

BEAMS


Functionality at its best

Architectural space was the inspiration for this innovative, multiple design awards acclaimed radiator concept. Three beam-shaped volumes form a robust whole, nicely balanced with the geometric architecture in the living space. The geometric accessories provide you the option of making the desired accents yourself. Two water channels per element guarantee excellent efficiency, with optimal energy savings as a bonus.

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 129



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (aluminium)

ref. nr. see p. 128

price € 164



rectangular towel rail (M301)

ref. nr. see p. 128

price € 164

Other accessories, see p. 128



Delivery time 15 - 30 working days
(transport duration not included)

BEAMS

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

11258 -00

see table below

REFERENCE CODE CUSTOM MADE BEAMS						TECHNICAL DATA						STANDARD COLOUR		OTHER COLOURS			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. BEAMS : 11258																	
11258	0320	1600	0066	YYYY	-0000	2	320	1600	1127	583	1,29	15,50	1,00	-	881	11258-04	1013
		2				320	1800	1237	643	1,28	17,28	1,08	-	934	11258-01	1074	
		2				320	2000	1348	701	1,28	19,05	1,15	-	959	11258-05	1103	
		2				320	2200	1459	755	1,29	20,90	1,30	-	1018	-	1171	
11258	0490	1600	0066	YYYY	-0000	3	490	1600	1658	867	1,27	23,20	1,53	-	1284	11258-06	1477
		3				490	1800	1821	947	1,28	25,88	1,64	-	1361	11258-02	1565	
		3				490	2000	1983	1026	1,29	28,55	1,75	-	1400	11258-03	1610	
		3				490	2200	2147	1111	1,29	31,25	2,00	-	1496	-	1720	
11258	0660	1600	0066	YYYY	-0000	4	660	1600	2172	1147	1,25	30,90	2,05	-	1645	-	1892
		4				660	1800	2385	1247	1,27	34,48	2,20	-	1752	11258-07	2015	
		4				660	2000	2598	1337	1,30	38,05	2,35	-	1805	11258-08	2076	
		4				660	2200	2812	1455	1,29	41,60	2,70	-	1933	-	2223	

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

Vasco

ACCESSORIES					
		WIDTH RADIATOR	COLOUR	REF. NR.	€
TOWEL RAIL 	BEAMS				
		320 mm	ALUMINIUM	1183 262 0000 0000	164
		490 mm	ALUMINIUM	1183 263 0000 0000	164
		660 mm	ALUMINIUM	1183 264 0000 0000	164
- Towel rail in aluminium - h = 50 mm; b = 380, 550, 720 mm; d = 50 mm; a = 46 mm					
		WIDTH TOWEL RAIL	COLOUR*	REF. NR.	€
SHORT TOWEL RAIL 	BEAMS / BEAMS MONO				
		240 mm	S600	1183 700 0000 0600	135
			M301	1183 700 0000 0301	135
			RAL 9005 ^S	1183 700 0000 9005	135
d = 49,35 mm; a = 39,35 mm					
LONG TOWEL RAIL 	BEAMS				
		440 mm	S600	1183 701 0000 0600	135
			M301	1183 701 0000 0301	135
			RAL 9005 ^S	1183 701 0000 9005	135
d = 49,35 mm; a = 39,35 mm					
RECTANGULAR TOWEL RAIL 	BEAMS / BEAMS MONO				
		286 x 110 mm	S600	1183 702 0000 0600	164
			M301	1183 702 0000 0301	164
			RAL 9005 ^S	1183 702 0000 9005	164
d = 49,35 mm; a = 39,35 mm					
SQUARE TOWEL RAIL 	BEAMS / BEAMS MONO				
		240 x 240 mm	S600	1183 703 0000 0600	164
			M301	1183 703 0000 0301	164
			RAL 9005 ^S	1183 703 0000 9005	164
d = 49,35 mm; a = 39,35 mm					
TOWEL RAIL MULTI+ RIGHT 	BEAMS				
		600 mm	S600	1183 734 0000 0600	204
			M301	1183 734 0000 0301	204
			RAL 9005 ^S	1183 734 0000 9005	204
h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;					
TOWEL RAIL MULTI+ LEFT 	BEAMS				
		600 mm	S600	1183 735 0000 0600	204
			M301	1183 735 0000 0301	204
			RAL 9005 ^S	1183 735 0000 9005	204
h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;					
TOWEL RAIL 	BEAMS / BEAMS MONO				
		240 mm	CHROME	1183 273 0000 0099	107
		240 mm	S600	1183 273 0000 0600	107
		240 mm	RAL 9005 ^M	1183 273 0000 9005	107
h = 55 mm; b = 240 mm; d = 67 mm; a = 61 mm;					

^S structure black


^M matt black

* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.

Mounting instructions accessories: see www.vasco.eu
EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall
d = distance front of the accessory up to front of the radiator
c = distance between wall to back towel bar
a = distance accessory up to the radiator
available from stock

BEAMS: BEAMS / BEAMS MONO



Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.



BRYCE MONO

Minimalism in aluminium

The sections (150 mm) of the Bryce Mono can be mounted separately; you can have one, two, three or more sections in the same colour or in different shades. Bryce Mono allows for great flexibility and creativity when it comes to interior decor. The temperature is regulated via a single thermostat that can control the sections in series or separately.

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in colour Jet Black
- Extensive colour chart see p. 10

SPECIAL

- Composed out of 1 vertical aluminium profile (width 150 mm)
- Protection against internal corrosion: protecting product Protect X100
- The Bryce is awarded with the Henry van de Velde label 2007, the Product Design Award Hannover 2008, Design Plus Award - Material Vision, Frankfurt 2007, the Red Dot Product Design Award 2008 and nominated for the Designpreis 2009 and the European Aluminium Award 2008.

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C
- **Integrated connection (valve set) (lockable) (the central heating pipes should be connected directly to this)**

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 146

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (built-in thermostat box, see p. 359)
- ✗ Integrated valve
- Connections: 3/4" Euro cones
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**
- **Attention: must be used in combination with the built-in thermostat box.**


PROTECT X100*

Ref. nr. 11FH55064

price € 89

* 1 bottle (1 litre) per 100 litres installation water

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 135

BUILT-IN THERMOSTAT BOX



ref. nr. 1182 306 0000 0099

price € 409

Fittings, see p. 359

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



short towel rail (M301)

ref. nr. see p. 134

price € 135

Other accessories, see p. 134

INTEGRATED CONNECTION (VALVE SET) (SQUARE)



Fittings, see p. 359



HOW TO ORDER BRYCE MONO

Delivery time 15 - 30 working days
(transport duration not included)

							ref. nr. (5 digits)
							width (4 digits)
							height (4 digits)
							connection (4 digits) p. 135
							colour (4 digits) p. 10
11209	0150	1800	0066	YYY	-0000		version (4 digits)

HOW TO ORDER STOCK RADIATOR BRYCE MONO

Delivery time 5 working days
(transport duration not included)

			ref. nr. (5 digits)
11209	-00		see table below



BRYCE MONO

PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE BRYCE MONO						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. BRYCE MONO : 11209																	
11209	0150	1800	0066	YYYY	-0000	-	150	1800	586	306	1,27	8,60	0,47	-	843	11209-10	969
		-				150	2000	642	336	1,27	9,55	0,52	-	888	-	1021	
		-				150	2200	696	364	1,27	10,50	0,57	-	951	-	1094	

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

BRYCE VERTICAL (BRYCE V75, BRYCE V100)



BRYCE VERTICAL

Heat in a new light

A designer radiator that constantly evokes new light shades and contrasts due to the fine, irregular structure of the front, and in this way contributes to a pleasant, natural ambience in the intimate space. A perfect example of applied design and a valuable asset in any contemporary interior.

TYPES

- Vertical: Bryce V75 and Bryce V100 (depth)

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in colour Jet Black
- Extensive colour chart see p. 10

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100
- The Bryce is awarded with the Henry van de Velde label 2007, the Product Design Award Hannover 2008, Design Plus Award - Material Vision, Frankfurt 2007, the Red Dot Product Design Award 2008 and nominated for the Designpreis 2009 and the European Aluminium Award 2008.

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 147

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**


PROTECT X100*

Ref. nr. 11FH55064


price € 89

* 1 bottle (1 litre) per 100 litres installation water

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 135



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (aluminium)

ref. nr. see p. 134

price € 164



rectangular towel rail (M301)

ref. nr. see p. 134


price € 164

Other accessories, see p. 134



HOW TO ORDER BRYCE VERTICAL

Delivery time 15 - 30 working days
(transport duration not included)

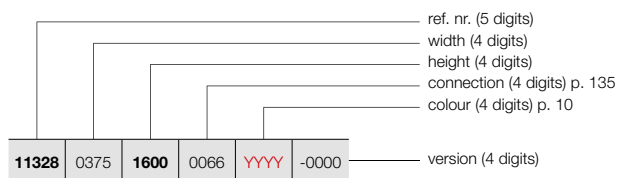

BRYCE VERTICAL (BRYCE V75, BRYCE V100)




BRYCE V75



BRYCE V100

HOW TO ORDER STOCK RADIATOR BRYCE VERTICAL

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE BRYCE VERTICAL	TECHNICAL DATA									STANDARD COLOUR		OTHER COLOURS
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. BRYCE VERTICAL BRYCE V75 : 11328												
11328 0375 1600 0066 YYYY -0000	-	375	1600	1189	609	1,31	19,75	1,35	-	913	-	1050
	-	375	1800	1314	666	1,33	21,88	1,48	-	970	-	1116
	-	375	2000	1428	728	1,32	24,00	1,60	-	993	-	1142
	-	375	2200	1533	785	1,31	26,20	1,75	-	1064	-	1224
11328 0450 1600 0066 YYYY -0000	-	450	1600	1408	710	1,34	23,72	1,57	-	1071	-	1232
	-	450	1800	1555	784	1,34	26,25	1,74	-	1136	11328-01	1306
	-	450	2000	1690	861	1,32	28,78	1,92	-	1174	-	1350
	-	450	2200	1814	929	1,31	31,50	2,17	-	1260	-	1449
11328 0525 1600 0066 YYYY -0000	-	525	1600	1623	802	1,38	27,68	1,78	-	1228	-	1412
	-	525	1800	1792	895	1,36	30,63	2,01	-	1310	11328-02	1507
	-	525	2000	1948	993	1,32	33,57	2,23	-	1348	-	1550
	-	525	2200	2091	1071	1,31	36,80	2,58	-	1452	-	1670
11328 0600 1600 0066 YYYY -0000	-	600	1600	1836	893	1,41	31,65	2,00	-	1389	-	1597
	-	600	1800	2028	1007	1,37	35,00	2,28	-	1481	11328-03	1703
	-	600	2000	2204	1123	1,32	38,35	2,55	-	1530	11328-04	1760
	-	600	2200	2365	1205	1,32	42,10	3,00	-	1644	-	1891
REF. NR. BRYCE VERTICAL BRYCE V100 : 11209												
11209 0375 1600 0066 YYYY -0000	-	375	1600	1238	624	1,34	19,65	1,35	-	1099	-	1264
	-	375	1800	1373	700	1,32	22,03	1,48	-	1166	-	1341
	-	375	2000	1503	774	1,30	24,40	1,60	-	1197	-	1377
	-	375	2200	1628	838	1,30	26,65	1,75	-	1275	-	1466
11209 0450 1600 0066 YYYY -0000	-	450	1600	1482	751	1,33	23,73	1,60	-	1284	-	1477
	-	450	1800	1644	838	1,32	26,53	1,80	-	1361	11209-01	1565
	-	450	2000	1799	921	1,31	29,33	2,00	-	1400	-	1610
	-	450	2200	1950	1004	1,30	32,20	2,07	-	1496	-	1720
11209 0525 1600 0066 YYYY -0000	-	525	1600	1726	875	1,33	27,82	1,85	-	1464	-	1684
	-	525	1800	1914	975	1,32	31,04	2,13	-	1556	11209-03	1789
	-	525	2000	2095	1067	1,32	34,27	2,40	-	1600	-	1840
	-	525	2200	2270	1168	1,30	37,75	2,68	-	1711	-	1968
11209 0600 1600 0066 YYYY -0000	-	600	1600	1969	998	1,33	31,90	2,10	-	1645	-	1892
	-	600	1800	2184	1113	1,32	35,55	2,45	-	1752	11209-08	2015
	-	600	2000	2391	1218	1,32	39,20	2,80	-	1805	11209-05	2076
	-	600	2200	2590	1326	1,31	43,30	3,15	-	1933	-	2223

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)

EXPORT. Prices in Euro (excl. VAT)

VASCO

ACCESSORIES		WIDTH RADIATOR	COLOUR	REF. NR.	€
TOWEL RAIL 	BRYCE V75 / BRYCE V100				
	375 mm	ALUMINIUM	1183 244 0000 0000	164	
	450 mm	ALUMINIUM	1183 245 0000 0000	164	
	525 mm	ALUMINIUM	1183 246 0000 0000	164	
	600 mm	ALUMINIUM	1183 247 0000 0000	164	
- Towel rail in aluminium - h = 50 mm; b = 435, 510, 585, 660 mm; d = 47 mm; a = 43 mm					
SHORT TOWEL RAIL 	WIDTH TOWEL RAIL		COLOUR*	REF. NR.	€
	BRYCE V75 / BRYCE V100 / BRYCE MONO				
	240 mm	S600	1183 700 0000 0600	135	
		M301	1183 700 0000 0301	135	
		RAL 9005 ^S	1183 700 0000 9005	135	
d = 49,35 mm; a = 39,35 mm					
LONG TOWEL RAIL 	BRYCE V75 / BRYCE V100				
	440 mm	S600	1183 701 0000 0600	135	
		M301	1183 701 0000 0301	135	
		RAL 9005 ^S	1183 701 0000 9005	135	
	d = 49,35 mm; a = 39,35 mm				
RECTANGULAR TOWEL RAIL 	BRYCE V75 / BRYCE V100 / BRYCE MONO				
	286 x 110 mm	S600	1183 702 0000 0600	164	
		M301	1183 702 0000 0301	164	
		RAL 9005 ^S	1183 702 0000 9005	164	
	d = 49,35 mm; a = 39,35 mm				
SQUARE TOWEL RAIL 	BRYCE V75 / BRYCE V100 / BRYCE MONO				
	240 x 240 mm	S600	1183 703 0000 0600	164	
		M301	1183 703 0000 0301	164	
		RAL 9005 ^S	1183 703 0000 9005	164	
	d = 49,35 mm; a = 39,35 mm				
TOWEL RAIL MULTI+ RIGHT 	BRYCE V75 / BRYCE V100				
	600 mm	S600	1183 734 0000 0600	204	
		M301	1183 734 0000 0301	204	
		RAL 9005 ^S	1183 734 0000 9005	204	
	h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;				
TOWEL RAIL MULTI+ LEFT 	BRYCE V75 / BRYCE V100				
	600 mm	S600	1183 735 0000 0600	204	
		M301	1183 735 0000 0301	204	
		RAL 9005 ^S	1183 735 0000 9005	204	
	h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;				
TOWEL RAIL 	BRYCE V75 / BRYCE V100 / BRYCE MONO				
	240 mm	CHROME	1183 273 0000 0099	107	
	240 mm	S600	1183 273 0000 0600	107	
	240 mm	RAL 9005 ^M	1183 273 0000 9005	107	
	h = 55 mm; b = 240 mm; d = 67 mm; a = 61 mm;				

^S structure black


^M matt black

* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.

Mounting instructions accessories: see www.vasco.eu
EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall
d = distance front of the accessory up to front of the radiator
c = distance between wall to back towel bar
a = distance accessory up to the radiator
available from stock

BRYCE VERTICAL: BRYCE V75 / BRYCE V100 / BRYCE MONO



Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.



COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Not available in colour Jet Black
- Extensive colour chart see p. 10

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 147

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: 1/2" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**

ALU-ZEN VERTICAL

When heating is visible

A designer radiator, inspired by the elegance and tranquillity of natural curves. A design which is enhanced by the floating towel rails. All this combined with a fast, convenient installation due to the handy centre connection and optimum heat output. A radiator that guarantees a real wellness atmosphere.


PROTECT X100*

Ref. nr. 11FH55064


price € 89

* 1 bottle (1 litre) per 100 litres installation water

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 138



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (aluminium)

ref. nr. see p. 138

price € 164

Other accessories, see p. 138



Delivery time 15 - 30 working days
(transport duration not included)

ALU-ZEN

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

11114 -00

see table below

REFERENCE CODE CUSTOM MADE ALU-ZEN VERTICAL						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Ø50K)	55/45/20 (Watt) (Ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. ALU-ZEN VERTICAL : 11114																	
11114	0375	1600	0066	YYYY	-0000	-	375	1600	1196	616	1,30	17,40	1,30	-	1101	-	1266
		1800				-	375	1800	1319	675	1,31	19,40	1,40	-	1167	-	1342
		2000				-	375	2000	1440	737	1,31	21,40	1,50	-	1197	-	1377
		2200				-	375	2200	1557	797	1,31	23,25	1,75	-	1275	-	1466
11114	0450	1600	0066	YYYY	-0000	-	450	1600	1446	741	1,31	21,07	1,53	-	1284	-	1477
		1800				-	450	1800	1596	817	1,31	23,49	1,68	-	1361	11114-06	1565
		2000				-	450	2000	1742	892	1,31	25,92	1,83	-	1400	-	1610
		2200				-	450	2200	1884	965	1,31	28,20	2,07	-	1496	-	1720
11114	0525	1600	0066	YYYY	-0000	-	525	1600	1699	870	1,31	24,73	1,77	-	1464	-	1684
		1800				-	525	1800	1874	960	1,31	27,58	1,97	-	1553	11114-01	1786
		2000				-	525	2000	2046	1048	1,31	30,43	2,17	-	1600	11114-04	1840
		2200				-	525	2200	2212	1133	1,31	33,15	2,38	-	1711	-	1968
11114	0600	1600	0066	YYYY	-0000	-	600	1600	1953	1000	1,31	28,40	2,00	-	1645	-	1892
		1800				-	600	1800	2155	1104	1,31	31,68	2,25	-	1752	11114-03	2015
		2000				-	600	2000	2351	1204	1,31	34,95	2,50	-	1805	11114-02	2076
		2200				-	600	2200	2543	1302	1,31	38,10	2,70	-	1933	-	2223

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

EXPORT. Prices in Euro (excl. VAT)

Vasco

ACCESSORIES		WIDTH RADIATOR	COLOUR	REF. NR.	€
TOWEL RAIL  - Towel rail in aluminium - h = 50 mm; b = 435, 510, 585, 660 mm; d = 46 mm; a = 42 mm		375 mm	ALUMINIUM	1183 234 0000 0000	164
		450 mm	ALUMINIUM	1183 235 0000 0000	164
		525 mm	ALUMINIUM	1183 236 0000 0000	164
		600 mm	ALUMINIUM	1183 237 0000 0000	164
		WIDTH TOWEL RAIL	COLOUR*	REF. NR.	€
SHORT TOWEL RAIL  d = 67 mm; a = 57 mm		240 mm	S600	1183 700 0000 0600	135
			M301	1183 700 0000 0301	135
			RAL 9005 ^S	1183 700 0000 9005	135
LONG TOWEL RAIL  d = 67 mm; a = 57 mm		440 mm	S600	1183 701 0000 0600	135
			M301	1183 701 0000 0301	135
			RAL 9005 ^S	1183 701 0000 9005	135
RECTANGULAR TOWEL RAIL  d = 67 mm; a = 57 mm		286 x 110 mm	S600	1183 702 0000 0600	164
			M301	1183 702 0000 0301	164
			RAL 9005 ^S	1183 702 0000 9005	164
SQUARE TOWEL RAIL  d = 67 mm; a = 57 mm		240 x 240 mm	S600	1183 703 0000 0600	164
			M301	1183 703 0000 0301	164
			RAL 9005 ^S	1183 703 0000 9005	164
TOWEL RAIL MULTI+ RIGHT  h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;		600 mm	S600	1183 734 0000 0600	204
			M301	1183 734 0000 0301	204
			RAL 9005 ^S	1183 734 0000 9005	204
TOWEL RAIL MULTI+ LEFT  h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;		600 mm	S600	1183 735 0000 0600	204
			M301	1183 735 0000 0301	204
			RAL 9005 ^S	1183 735 0000 9005	204

^S structure black

* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.


Mounting instructions accessories: see www.vasco.eu

EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall
d = distance front of the accessory up to front of the radiator
c = distance between wall to back towel bar
a = distance accessory up to the radiator
available from stock

ALU-ZEN CONNECTIONS

ALU-ZEN VERTICAL: ALU-ZEN



Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.

TYPES

- Vertical: Zaros V75 and Zaros V100 (depth)

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 148

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**

PROTECT X100*

Ref. nr. 11FH55064

price € 89

* 1 bottle (1 litre) per 100 litres installation water

RECOMMENDED CONNECTION (0066)



RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (chrome)
ref. nr. see p. 144
price € 164

Other connection methods, see p. 145

Other accessories, see p. 144

return supply



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357



VASCO

ZAROS VERTICAL

Elementary, in its element everywhere

Simplicity is the driving force of this uncomplicated designer radiator. A design that excellently comes into its own in any room, any environment, any interior. Not hindered by unnecessary elements. With a simple line, but generous with heat.



ZAROS VERTICAL (ZAROS V75, ZAROS V100)




ZAROS V75



ZAROS V100


HOW TO ORDER ZAROS VERTICAL

Delivery time 15 - 30 working days
(transport duration not included)

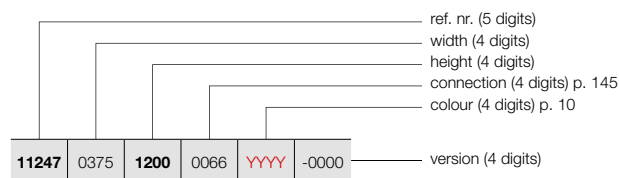

HOW TO ORDER STOCK RADIATOR ZAROS VERTICAL

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE ZAROS VERTICAL						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. ZAROS VERTICAL ZAROS V75 : 11247																	
11247	0375	1200	0066	YYYY	-0000	5	375	1200	885	453	1,31	13,20	1,00	-	803	-	923
		5				375	1600	1159	594	1,31	16,50	1,38	-	866	11247-05	996	
		5				375	1800	1281	656	1,31	18,48	1,44	-	922	11247-06	1060	
		5				375	2000	1403	719	1,31	20,45	1,50	-	942	-	1083	
		5				375	2200	1502	773	1,30	22,40	1,65	-	1004	-	1155	
11247	0450	1200	0066	YYYY	-0000	6	450	1200	1078	552	1,31	15,72	1,20	-	943	-	1084
		6				450	1600	1377	687	1,36	19,57	1,57	-	1011	-	1163	
		6				450	1800	1518	770	1,33	21,84	1,69	-	1072	11247-07	1233	
		6				450	2000	1659	850	1,31	24,12	1,82	-	1103	-	1268	
		6				450	2200	1765	909	1,30	26,55	2,00	-	1179	-	1356	
11247	0525	1200	0066	YYYY	-0000	7	525	1200	1272	648	1,32	18,23	1,40	-	1061	-	1220
		7				525	1600	1594	780	1,40	22,63	1,76	-	1154	-	1327	
		7				525	1800	1755	876	1,36	25,21	1,95	-	1228	11247-01	1412	
		7				525	2000	1915	981	1,31	27,78	2,13	-	1261	-	1450	
		7				525	2200	2027	1049	1,29	30,70	2,35	-	1350	-	1553	
11247	0600	1200	0066	YYYY	-0000	8	600	1200	1466	747	1,32	20,75	1,60	-	1189	-	1367
		8				600	1600	1812	868	1,44	25,70	1,95	-	1297	-	1492	
		8				600	1800	1991	984	1,38	28,58	2,20	-	1381	11247-04	1588	
		8				600	2000	2171	1106	1,32	31,45	2,45	-	1421	11247-02	1634	
		8				600	2200	2289	1184	1,29	34,85	2,70	-	1522	-	1750	
REF. NR. ZAROS VERTICAL ZAROS V100 : 11246																	
11246	0375	1600	0066	YYYY	-0000	5	375	1600	1352	696	1,30	18,85	1,25	-	962	-	1106
		5				375	1800	1490	763	1,31	21,50	1,40	-	1019	-	1172	
		5				375	2000	1625	836	1,30	23,30	1,60	-	1049	-	1206	
		5				375	2200	1757	904	1,30	25,70	1,65	-	1116	-	1283	
11246	0450	1600	0066	YYYY	-0000	6	450	1600	1607	827	1,30	22,38	1,48	-	1122	-	1290
		6				450	1800	1771	902	1,32	25,38	1,68	-	1193	-	1372	
		6				450	2000	1931	989	1,31	27,75	1,95	-	1228	-	1412	
		6				450	2200	2088	1075	1,30	30,52	2,00	-	1312	-	1509	
11246	0525	1600	0066	YYYY	-0000	7	525	1600	1859	952	1,31	25,92	1,72	-	1281	-	1473
		7				525	1800	2049	1039	1,33	29,27	1,97	-	1362	11246-01	1566	
		7				525	2000	2235	1145	1,31	32,20	2,30	-	1404	-	1615	
		7				525	2200	2417	1244	1,30	35,33	2,35	-	1499	-	1724	
11246	0600	1600	0066	YYYY	-0000	8	600	1600	2110	1081	1,31	29,45	1,95	-	1440	-	1656
		8				600	1800	2326	1173	1,34	33,15	2,25	-	1539	11246-03	1770	
		8				600	2000	2536	1299	1,31	36,65	2,65	-	1581	11246-02	1818	
		8				600	2200	2742	1411	1,30	40,15	2,70	-	1693	-	1947	

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

TYPES

- Horizontal: Zaros H100 (depth)

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect X100
- Zaros H100(-V) also available as toilet radiator (450 x 400 mm and 450 x 500 mm)

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 148

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✓ Integrated valve (**extra charge €157**) (order as special radiator) (see p. 344)
- Connections: 1/2" (inner thread)
- A standard automatic air vent is fitted on the top left hand side of the radiator
- Connection 27, 72: **supplement €70**
- **Attention: The water should be PH neutral. Protect X100 or a similar product should be added to the circuit.**


PROTECT X100*

Ref. nr. 11FH55064

price € 89

* 1 bottle (1 litre) per 100 litres installation water

RECOMMENDED CONNECTION (0098) INTEGRATED VALVE (SUPPLEMENT)



Supplement: €157 (see p. 344)
Other connection methods, see p. 145



ref. nr. 1182301 0000 0099

price € 147

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail (chrome)
ref. nr. see p. 144
price € 164

Other accessories, see p. 144



VASCO

ZAROS HORIZONTAL

The small space champion

The simple, sleek lines of the Zaros also work perfectly in small spaces. The Zaros Horizontal is a fundamental example of this. A classy designer radiator that still looks good even in smaller bathrooms and toilets. A pure source of heat in a ditto design that also looks splendid under windows.




ZAROS HORIZONTAL (ZAROS H100)



ZAROS H100

HOW TO ORDER ZAROS HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

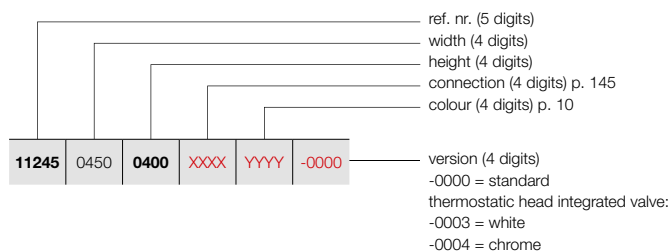

PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE ZAROS HORIZONTAL						TECHNICAL DATA								STANDARD COLOUR		OTHER COLOURS	
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	price colour (€)	
REF. NR. ZAROS HORIZONTAL ZAROS H100 : 11245																	
11245	0450	0400	XXXX	YYYY	-0000	6	450	400	452	233	1,30	6,66	0,48	-	564	649	
		0500				6	450	500	567	290	1,31	7,92	0,66	-	595	684	
		0600				6	450	600	666	343	1,30	9,24	0,78	-	632	727	
		0900				6	450	900	960	494	1,30	13,14	0,96	-	737	848	
		1400				6	450	1400	1391	709	1,32	20,30	1,38	-	918	1056	
11245	0525	0400	XXXX	YYYY	-0000	7	525	400	527	271	1,30	7,77	0,56	-	618	711	
		0500				7	525	500	662	339	1,31	9,24	0,77	-	652	750	
		0600				7	525	600	778	400	1,30	10,78	0,91	-	692	796	
		0900				7	525	900	1120	577	1,30	15,33	1,12	-	813	935	
		1400				7	525	1400	1614	822	1,32	23,70	1,57	-	1017	1170	
11245	0600	0500	XXXX	YYYY	-0000	8	600	500	756	387	1,31	10,56	0,88	-	701	806	
		0600				8	600	600	889	458	1,30	12,32	1,04	-	750	863	
		0900				8	600	900	1280	659	1,30	17,52	1,28	-	888	1021	
		1400				8	600	1400	1835	935	1,32	27,10	1,75	-	1122	1290	
11245	0675	0400	XXXX	YYYY	-0000	9	675	400	678	349	1,30	9,99	0,72	-	719	827	
		0500				9	675	500	851	436	1,31	11,88	0,99	-	757	871	
		0600				9	675	600	1000	515	1,30	13,86	1,17	-	811	933	
		0900				9	675	900	1440	741	1,30	19,71	1,44	-	963	1107	
11245	0750	0400	XXXX	YYYY	-0000	10	750	400	753	388	1,30	11,10	0,80	-	769	884	
		0500				10	750	500	945	484	1,31	13,20	1,10	-	812	934	
		0600				10	750	600	1111	572	1,30	15,40	1,30	-	866	996	
		0900				10	750	900	1600	824	1,30	21,90	1,60	-	1039	1195	
11245	0825	0400	XXXX	YYYY	-0000	11	825	400	828	426	1,30	12,21	0,88	-	819	942	
		0500				11	825	500	1040	533	1,31	14,52	1,21	-	864	994	
		0600				11	825	600	1222	629	1,30	16,94	1,43	-	925	1064	
		0900				11	825	900	1760	906	1,30	24,09	1,76	-	1116	1283	
11245	0900	0400	XXXX	YYYY	-0000	12	900	400	904	465	1,30	13,32	0,96	-	870	1001	
		0500				12	900	500	1134	581	1,31	15,84	1,32	-	920	1058	
		0600				12	900	600	1333	686	1,30	18,48	1,56	-	988	1136	
		0900				12	900	900	1920	988	1,30	26,28	1,92	-	1192	1371	
11245	0975	0400	XXXX	YYYY	-0000	13	975	400	979	504	1,30	14,43	1,04	-	923	1061	
		0500				13	975	500	1229	629	1,31	17,16	1,43	-	968	1113	
		0600				13	975	600	1444	743	1,30	20,02	1,69	-	1045	1202	
		0900				13	975	900	2080	1071	1,30	28,47	2,08	-	1267	1457	
11245	1050	0400	XXXX	YYYY	-0000	14	1050	400	1054	543	1,30	15,54	1,12	-	972	1118	
		0500				14	1050	500	1323	678	1,31	18,48	1,54	-	1023	1176	
		0600				14	1050	600	1555	800	1,30	21,56	1,82	-	1105	1271	
		0900				14	1050	900	2240	1153	1,30	30,66	2,24	-	1344	1546	


In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

HOW TO ORDER ZAROS HORIZONTAL

Delivery time 15 - 30 working days
(transport duration not included)

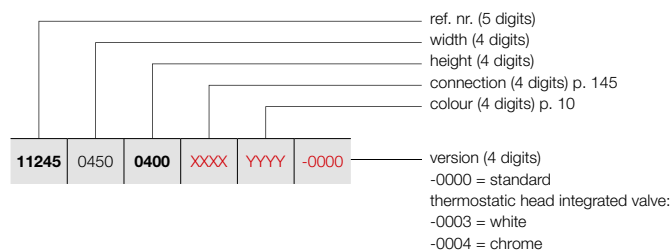

ZAROS HORIZONTAL (ZAROS H100)



ZAROS H100

PRODUCT GROUP: ALU

REFERENCE CODE CUSTOM MADE ZAROS HORIZONTAL						TECHNICAL DATA								STANDARD COLOUR	OTHER COLOURS	
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	price colour (€)
REF. NR. ZAROS HORIZONTAL ZAROS H100 : 11245																
11245	1125	0400	XXXX	YYYY	-0000	15	1125	400	1130	582	1,30	16,65	1,20	-	1023	1176
		0500				15	1125	500	1418	726	1,31	19,80	1,65	-	1076	1237
		0600				15	1125	600	1666	858	1,30	23,10	1,95	-	1164	1339
		0900				15	1125	900	2400	1235	1,30	32,85	2,40	-	1419	1632
11245	1200	0500	XXXX	YYYY	-0000	16	1200	500	1512	774	1,31	21,12	1,76	-	1129	1298
		0600				16	1200	600	1777	915	1,30	24,64	2,08	-	1223	1406
		0900				16	1200	900	2560	1318	1,30	35,04	2,56	-	1493	1717
11245	1350	0500	XXXX	YYYY	-0000	18	1350	500	1701	871	1,31	23,76	1,98	-	1238	1424
		0600				18	1350	600	1999	1029	1,30	27,72	2,34	-	1342	1543
		0900				18	1350	900	2880	1482	1,30	39,42	2,88	-	1648	1895
11245	1500	0400	XXXX	YYYY	-0000	20	1500	400	1506	775	1,30	22,20	1,60	-	1277	1469
		0500				20	1500	500	1890	968	1,31	26,40	2,20	-	1346	1548
		0600				20	1500	600	2222	1144	1,30	30,80	2,60	-	1462	1681
		0900				20	1500	900	3200	1647	1,30	43,80	3,20	-	1798	2068
11245	1650	0400	XXXX	YYYY	-0000	22	1650	400	1657	853	1,30	24,42	1,76	-	1379	1586
		0500				22	1650	500	2079	1065	1,31	29,04	2,42	-	1452	1670
		0600				22	1650	600	2444	1258	1,30	33,88	2,86	-	1576	1812
		0900				22	1650	900	3519	1811	1,30	48,18	3,52	-	1951	2244
11245	1800	0400	XXXX	YYYY	-0000	24	1800	400	1807	930	1,30	26,64	1,92	-	1481	1703
		0500				24	1800	500	2268	1162	1,31	31,68	2,64	-	1558	1792
		0600				24	1800	600	2666	1372	1,30	36,96	3,12	-	1695	1949
		0900				24	1800	900	3839	1976	1,30	52,56	3,84	-	2102	2417
11245	1950	0500	XXXX	YYYY	-0000	26	1950	500	2457	1258	1,31	34,32	2,86	-	1667	1917
		0600				26	1950	600	2888	1487	1,30	40,04	3,38	-	1813	2085
		0900				26	1950	900	4159	2141	1,30	56,94	4,16	-	2253	2591
11245	2550	0400	XXXX	YYYY	-0000	34	2550	400	2560	1318	1,30	37,74	2,72	-	1990	2289
11245	2850	0400	XXXX	YYYY	-0000	38	2850	400	2861	1473	1,30	42,18	3,04	-	2283	2625

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

VASCO

ACCESSORIES	WIDTH TOWEL RAIL	COLOUR*	REF. NR.	€
ZAROS V75 / ZAROS V100 / ZAROS H100				
TOWEL RAIL 		CHROME	1183 238 0000 0099	164
• h = 22 mm; b = 720 mm (easy adjustable) d = 75 mm; a = 56 mm				
ZAROS V75 / ZAROS V100				
TOWEL RAIL MULTI+ RIGHT 	600 mm	S600	1183 734 0000 0600	204
	600 mm	M301	1183 734 0000 0301	204
	600 mm	RAL 9005 ^S	1183 734 0000 9005	204
• h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;				
ZAROS V75 / ZAROS V100				
TOWEL RAIL MULTI+ LEFT 	600 mm	S600	1183 735 0000 0600	204
	600 mm	M301	1183 735 0000 0301	204
	600 mm	RAL 9005 ^S	1183 735 0000 9005	204
• h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;				

^S structure black

* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.

Mounting instructions accessories: see www.vasco.eu

EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall


d = distance front of the accessory up to front of the radiator

c = distance between wall to back towel bar


a = distance accessory up to the radiator

available from stock


ZAROS VERTICAL: ZAROS V75 / ZAROS V100



ZAROS HORIZONTAL: ZAROS H100

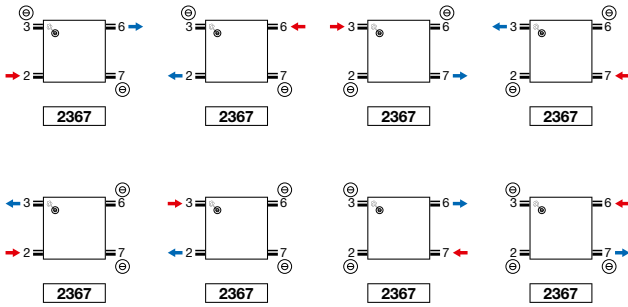


ZAROS HORIZONTAL: ZAROS H100




- Connections on special demand: supplement €70

ZAROS HORIZONTAL: ZAROS H100
INTEGRATED VALVE




- Supplement: €157 (see p. 344)
- Attention: the supply is always on the right side of the radiator!

BEAMS (BEAMS MONO)

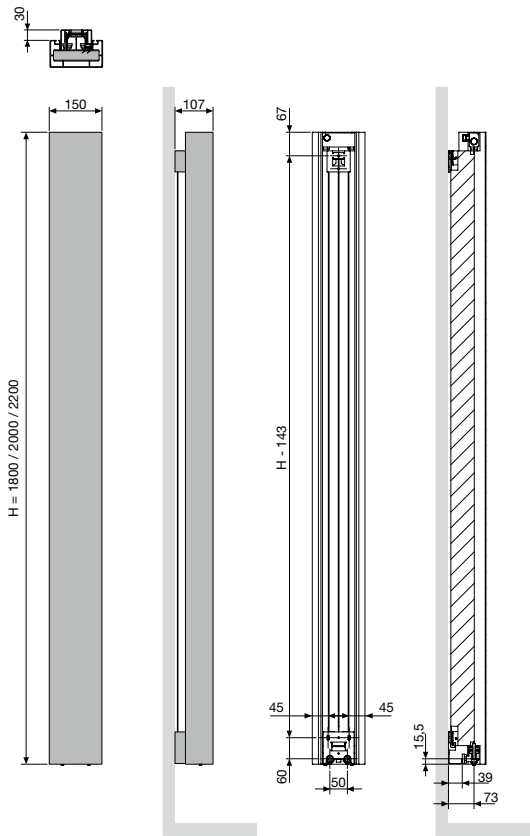


BEAMS MONO
Centre between the connections 50

BEAMS (BEAMS)

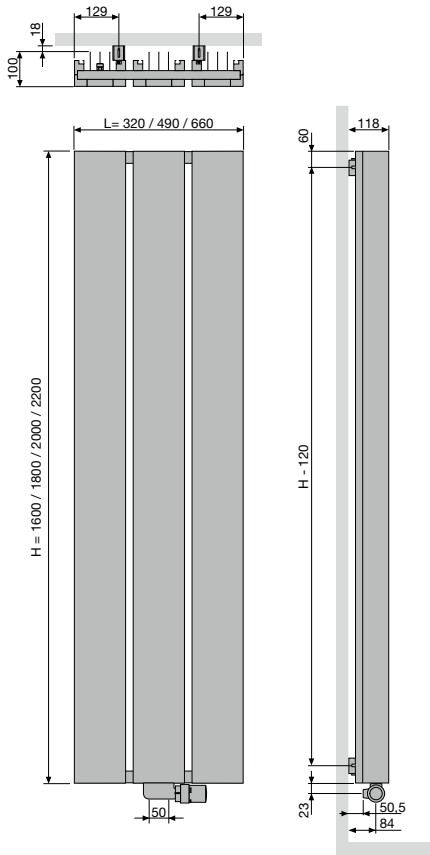


BEAMS
Centre between the connections 50
Centre between the brackets L-258

BRYCE (BRYCE MONO)

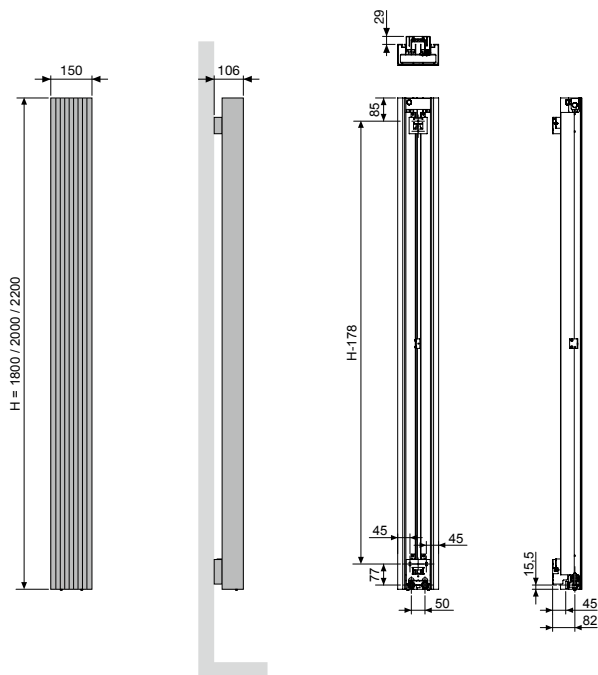


BRYCE MONO
Centre between the connections 50

BRYCE VERTICAL (BRYCE V75, BRYCE V100)

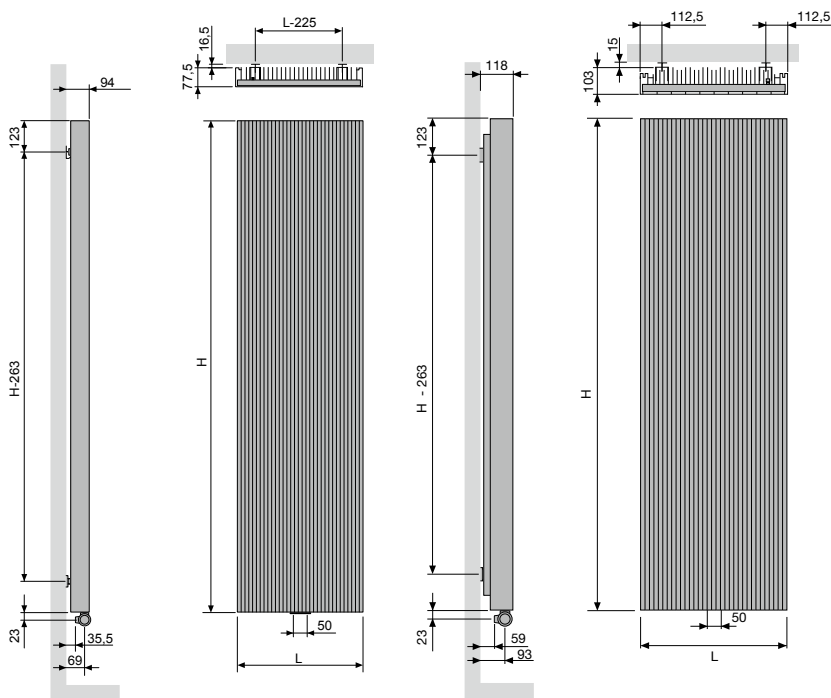


BRYCE V75 / BRYCE V100	
Centre between the connections	50
Centre between the brackets	L-225

ALU-ZEN VERTICAL (ALU-ZEN)

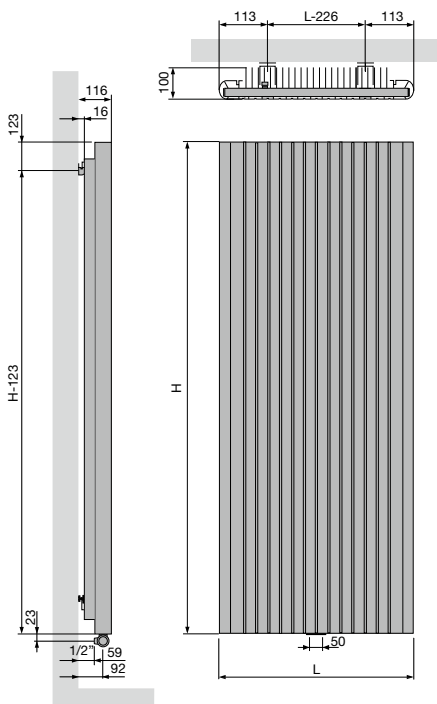

ALU-ZEN	
Centre between the connections	50
Centre between the brackets	L-226

ZAROS VERTICAL (ZAROS V75, ZAROS V100)

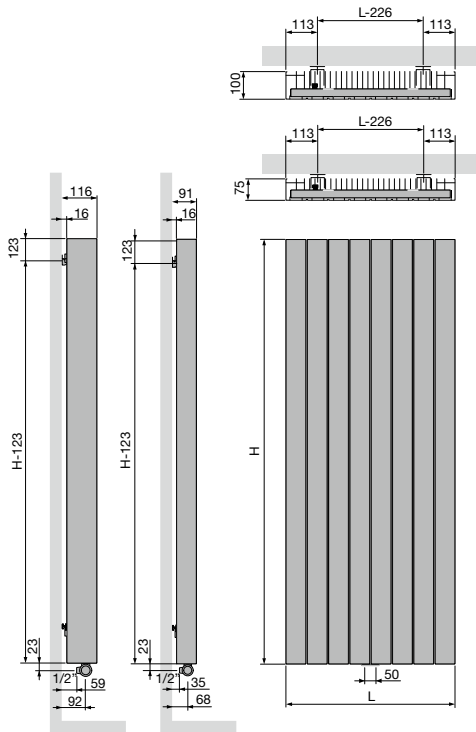


ZAROS V75 / ZAROS V100


Centre between the connections	50
Centre between the brackets	L-226

ZAROS HORIZONTAL (ZAROS H100)

ZAROS HORIZONTAL (ZAROS H100)

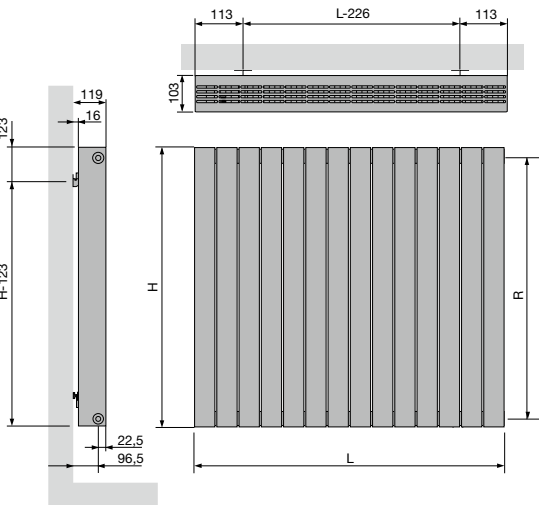

ZAROS HORIZONTAL (ZAROS H100)
INTEGRATED VALVE

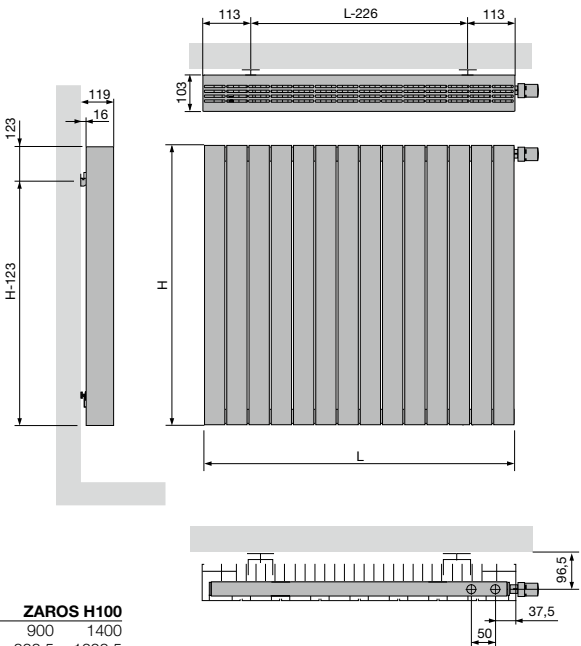

ZAROS H100

Height (H)	400	500	600	900	1400
Centre between the lateral connections 23/67 (R)	338,5	438,5	538,5	838,5	1338,5
Centre between the brackets	L-226				