



BATHROOM RADIATORS

For years Vasco has paid particular attention to **heating of 'the intimate space'**, with radiators that tangibly and visibly contribute to a pleasant atmosphere. From practical ladder models in all designs and sizes to slim space saving designer radiators that make you feel warm just by looking at them.

Vasco bathroom radiators increase the feeling of wellness in the bathroom with smart targeted solutions and accessories.

Even the smallest details are dedicated to optimal comfort and a beautiful timeless look. Connection and fastening systems are well thought out and efficiently integrated into the design. Drying and stacking shelves, towel rails and operating buttons also form a homogenous whole in the design.

Electric bathroom radiators:
see p. 52



BATHROOM RADIATORS

ONI	14
IRIS	16
MALVA	19
PRADO	23
AGAVE	25
ASTER	28
BANO	30
CARRÉ BATHROOM	34
ARCHE BATHROOM	36
ZANA BATHROOM	38

ONI (O-P, O-NP)

VASCO



TYPES

- O-P: with one (1400 mm) or two (1800/2000 mm) cut-outs for hanging towels
- O-NP: without cut-outs

COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

SPECIAL

- A copper heating tube is integrated into the ultra-thin aluminium front plate.

BRACKETS

- Wall brackets standard

TECHNICAL

- The pathway for the heating tube is milled out to 2 mm below the surface. The tube is then pressed into the aluminium plate.
- KTL priming coat, powder coating
- Standard operating pressure: 6 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 44

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: 1/2" (inner thread)

ONI


Simplicity and efficiency combined in the absolute essence, free of any superfluity

The timeless Oni combines clean and sober design with unsurpassed user-friendliness. With its gently rounded corners and slender heating surface, it elicits admiration in every interior. The Oni is available in virtually all Vasco colours and thus easily matches every setting.

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099
price € 218
Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN (O-NP) IN OPTION



towel rail MULTI+ right (S600)
ref. nr. see p. 41
price € 204

towel rail MULTI+ right (M301)
ref. nr. see p. 41
price € 204


towel rail MULTI+ right (RAL 9005)
ref. nr. see p. 41
price € 204

Other accessories, see p. 41




HOW TO ORDER ONI

Delivery time 15 - 30 working days
(transport duration not included)

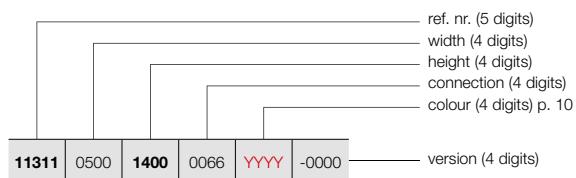

HOW TO ORDER STOCK RADIATOR ONI

Delivery time 5 working days
(transport duration not included)



ONI (O-P, O-NP)



O-P



O-NP

PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE ONI						TECHNICAL DATA								STANDARD COLOUR		OTHER COLOURS	
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)
REF. NR. ONI O-P : 11311																	
11311	0500	1400	0066	YYYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-	1203	11311-01	1383
		1800				-	500	1800	795	420	1,25	20,85	0,45	-	1360	11311-02	1564
		2000				-	500	2000	815	430	1,25	22,95	0,60	-	1436	11311-03	1651
REF. NR. ONI O-NP : 11312																	
11312	0500	1400	0066	YYYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-	1112	11312-01	1279
		1800				-	500	1800	795	420	1,25	20,85	0,45	-	1267	11312-02	1457
		2000				-	500	2000	815	430	1,25	22,95	0,60	-	1344	11312-03	1546

In conformity with EN442-1: 2014: radiators and convectors

* RAL 9016: no extra charge 15%

For heat outputs in other regimes, see p. 350 (correction factors)

EXPORT. Prices in Euro (excl. VAT)

VASCO



IRIS (HDM, HDRM)

VASCO



TYPES

- Straight (HDM) and curved (HDRM)

TUBES

- Horizontal, round Ø 22 mm

COLLECTORS

- Vertical, D-profile 34 x 34 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

SPECIAL

- The horizontal tubes of type HDRM are slightly bent (10°).

BRACKETS

- Wall brackets standard
- White bracket is delivered with white radiator (RAL 9016) - chrome bracket with other colours
- HDM also available as free-standing radiator, see p. 40

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 45

CONNECTION


- ✓ One-point connection for one-pipe system (see p. 343)
- ✓ One-point connection for two-pipe system (see p. 343)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

IRIS

Design, power and sustainability in one compact model

The basic model for bathroom radiators for many years. The seamless connection between the vertical D profile and horizontal tubes ensures a homogenous structure wherein everything is correct. The Iris also guarantees a trouble-free assembly thanks to the smart centre connection. A radiator that is perfectly finished with a superior comfort for many years.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 9016

price € 195

Fittings, see p. 357

INCLUDED FREE OF CHARGE



standard, folding chrome plated drying and stacking rack



HDM

Delivery time 15 - 30 working days
(transport duration not included)

Delivery time 15 - 30 working days
(transport duration not included)

ref. nr. (5 digits)
width (4 digits)
height (4 digits)
connection (4 digits) p. 43
colour (4 digits) p. 10

11165 0450 **0690** 1188 **YYYY** -0000

version (4 digits)

See p. 40 for additional accessories.

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

11165 -00

see table below



HDM

PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE IRIS						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. IRIS HDM : 11165																	
11165	0450	0690	1188	YYYY	-0000	17	450	690	350	182	1,28	6,65	3,10	300	435	-	500
		1122				27	450	1122	551	287	1,28	10,45	5,50	500	544	11165-17	626
		1338				33	450	1338	654	340	1,28	12,50	6,56	500	658	11165-18	757
		1734				42	450	1734	849	442	1,28	16,25	8,50	750	724	11165-09	833
11165	0500	0690	1188	YYYY	-0000	17	500	690	389	203	1,27	7,15	3,39	300	446	11165-02	513
		1122				27	500	1122	612	320	1,27	11,29	5,90	500	564	11165-04	649
		1338				33	500	1338	726	378	1,28	13,46	7,01	750	676	11165-19	777
		1734				42	500	1734	942	490	1,28	17,45	9,05	1000	747	11165-10	859
11165	0600	0690	1188	YYYY	-0000	17	600	690	465	243	1,27	8,15	3,97	500	467	11165-20	537
		1122				27	600	1122	732	383	1,27	12,95	6,70	750	596	11165-06	685
		1338				33	600	1338	869	454	1,27	15,38	7,91	750	711	11165-07	818
		1734				42	600	1734	1128	587	1,28	19,83	10,13	1000	788	11165-11	906
		2022				50	600	2022	1325	693	1,27	26,65	13,48	1250	899	11165-13	1034
11165	0750	0690	1188	YYYY	-0000	17	750	690	580	305	1,26	9,65	4,83	500	499	-	574
		1122				27	750	1122	913	480	1,26	15,45	7,90	750	636	-	731
		1338				33	750	1338	1083	566	1,27	18,26	9,26	1000	764	11165-08	879
		1734				42	750	1734	1406	727	1,29	23,42	11,77	1500	856	11165-12	984
		2022				50	750	2022	1652	863	1,27	29,90	14,67	1500	976	11165-14	1122
11165	0900	0690	1188	YYYY	-0000	17	900	690	694	366	1,25	11,15	5,70	500	534	-	614
		1122				27	900	1122	1093	577	1,25	17,95	9,10	1000	680	-	782
		1338				33	900	1338	1297	678	1,27	21,14	10,62	1250	816	-	938
		1734				42	900	1734	1684	871	1,29	27,00	13,40	1500	923	11165-21	1061
		2022				50	900	2022	1978	1029	1,28	33,15	15,85	1500	1053	11165-15	1211

In conformity with EN442-1: 2014: radiators and convectors

EXPORT. Prices in Euro (excl. VAT)

Vasco


IRIS (HDRM)



HDRM


HOW TO ORDER IRIS

Delivery time 15 - 30 working days
(transport duration not included)

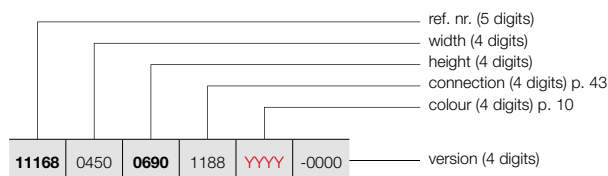

HOW TO ORDER STOCK RADIATOR IRIS

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE IRIS						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Ø50K)	55/45/20 (Watt) (Ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. IRIS HDRM : 11168																	
11168	0450	0690	1188	YYYY	-0000	17	450	690	350	182	1,28	6,65	3,10	300	475	-	546
		27				450	1122	551	287	1,28	10,45	5,50	500	602	-	692	
		33				450	1338	654	340	1,28	12,50	6,56	500	720	-	828	
		42				450	1734	849	442	1,28	16,25	8,50	750	794	-	913	
11168	0500	0690	1188	YYYY	-0000	17	500	690	389	203	1,27	7,15	3,39	300	490	-	564
		27				500	1122	612	320	1,27	11,29	5,90	500	619	-	712	
		33				500	1338	726	378	1,28	13,46	7,01	750	745	-	857	
		42				500	1734	942	490	1,28	17,45	9,05	1000	822	-	945	
11168	0600	0690	1188	YYYY	-0000	17	600	690	465	243	1,27	8,15	3,97	500	514	-	591
		27				600	1122	732	383	1,27	12,95	6,70	750	656	-	754	
		33				600	1338	869	454	1,27	15,38	7,91	750	784	-	902	
		42				600	1734	1128	587	1,28	19,83	10,13	1000	866	11168-09	996	
		50				600	2022	1325	693	1,27	26,65	13,48	1250	989	-	1137	
11168	0750	0690	1188	YYYY	-0000	17	750	690	580	305	1,26	9,65	4,83	500	550	-	633
		27				750	1122	913	480	1,26	15,45	7,90	750	701	-	806	
		33				750	1338	1083	566	1,27	18,26	9,26	1000	839	-	965	
		42				750	1734	1406	727	1,29	23,42	11,77	1500	940	-	1081	
		50				750	2022	1652	863	1,27	29,90	14,67	1500	1074	-	1235	
11168	0900	0690	1188	YYYY	-0000	17	900	690	694	366	1,25	11,15	5,70	500	586	-	674
		27				900	1122	1093	577	1,25	17,95	9,10	1000	750	-	863	
		33				900	1338	1297	678	1,27	21,14	10,62	1250	897	-	1032	
		42				900	1734	1684	871	1,29	27,00	13,40	1500	1015	-	1167	
		50				900	2022	1978	1029	1,28	33,15	15,85	1500	1157	-	1331	

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

TYPES

- Straight (BSM-S) and curved (BSRM-S)

TUBES

- Horizontal, round Ø 15 mm

COLLECTORS

- Vertical, semi-round Ø 42 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

SPECIAL

- The horizontal tubes of type BSRM-S are slightly bent (10°).

BRACKETS

- Wall brackets standard
- White bracket is delivered with white radiator (RAL 9016) - chrome bracket with other colours
- BSM-S also available as free-standing radiator, see p. 40

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✗ Pure electrical radiator prefilled
- ✓ Mixed radiator


TECHNICAL DRAWINGS

- See p. 45

CONNECTION

- ✓ One-point connection for one-pipe system (see p. 343)
- ✓ One-point connection for two-pipe system (see p. 343)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 9016

price € 195

Fittings, see p. 357

INCLUDED FREE OF CHARGE



standard, folding chrome plated
drying and stacking rack



VASCO

MALVA LACQUERED


The ladder to an optimal bathroom comfort

A ladder radiator that keeps towels warm and immediately heats up the entire bathroom to the desired temperature. Quickly and easily mountable thanks to the handy centre connection. The thin, round tubes provide a playful and delicate whole. As soon as it is hanging all you have to do is enjoy. The wonderful heat and the trendy, harmonic design.




BSM-S

MALVA LACQUERED (BSM-S, BSRM-S)



BSM-S



BSRM-S

DISCONTINUED ITEM

HOW TO ORDER MALVA LACQUERED

Delivery time 15 - 30 working days
(transport duration not included)

					ref. nr. (5 digits)	
					width (4 digits)	
					height (4 digits)	
					connection (4 digits) p. 43	
					colour (4 digits) p. 10	
11123	0450	0744	1188	YYYY	-0000	version (4 digits)

FREE-STANDING INSTALLATION (BSM-S)

See p. 40 for additional accessories.

HOW TO ORDER STOCK RADIATOR MALVA LACQUERED

Delivery time 5 working days
(transport duration not included)

		ref. nr. (5 digits)
11123	-00	see table below

PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE MALVA LACQUERED						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (ø50K)	55/45/20 (Watt) (ø30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. MALVA LACQUERED BSM-S : 11123																	
11123	0450	0744	1188	YYYY	-0000	21	450	744	356	188	1,25	6,45	2,55	300	497	-	572
		1122				32	450	1122	534	282	1,25	9,40	4,00	500	629	-	723
		1338				40	450	1338	638	332	1,28	11,38	4,76	500	755	-	868
		1689				50	450	1689	808	412	1,32	14,60	6,00	750	831	-	956
11123	0500	0744	1188	YYYY	-0000	21	500	744	389	203	1,27	6,87	2,67	300	516	-	593
		1122				32	500	1122	585	309	1,25	10,07	4,18	500	646	-	743
		1338				40	500	1338	698	363	1,28	12,17	4,99	750	777	-	894
		1689				50	500	1689	885	456	1,30	15,58	6,30	1000	856	11123-06	984
11123	0600	0744	1188	YYYY	-0000	21	600	744	455	232	1,32	7,70	2,90	300	535	-	615
		1122				32	600	1122	684	361	1,25	11,40	4,55	500	681	-	783
		1338				40	600	1338	816	424	1,28	13,74	5,45	750	816	-	938
		1689				50	600	1689	1035	538	1,28	17,55	6,90	1000	905	11123-07	1041
		1959				60	600	1959	1247	639	1,31	20,65	8,20	1250	1031	-	1186
11123	0750	0744	1188	YYYY	-0000	21	750	744	552	273	1,38	8,95	3,25	500	572	-	658
		1122				32	750	1122	828	437	1,25	13,40	5,10	750	731	-	841
		1338				40	750	1338	989	514	1,28	16,10	6,13	1000	875	-	1006
		1689				50	750	1689	1253	662	1,25	20,50	7,80	1250	986	-	1134
		1959				60	750	1959	1483	783	1,25	24,40	9,20	1500	1083	-	1245

REF. NR. MALVA LACQUERED BSRM-S : 11126

DISCONTINUED ITEM

11126	0450	0744	1188	YYYY	-0000	21	450	744	356	188	1,25	6,45	2,55	300	544	-	626
		1122				32	450	1122	534	282	1,25	9,40	4,00	500	690	-	794
		1338				40	450	1338	638	332	1,28	11,38	4,76	500	831	-	956
		1689				50	450	1689	808	412	1,32	14,60	6,00	750	915	-	1052
11126	0500	0744	1188	YYYY	-0000	21	500	744	389	203	1,27	6,87	2,67	300	566	-	651
		1122				32	500	1122	585	309	1,25	10,07	4,18	500	711	-	818
		1338				40	500	1338	698	363	1,28	12,17	4,99	750	855	-	983
		1689				50	500	1689	885	456	1,30	15,58	6,30	1000	942	-	1083
11126	0600	0744	1188	YYYY	-0000	21	600	744	455	232	1,32	7,70	2,90	300	590	-	679
		1122				32	600	1122	684	361	1,25	11,40	4,55	500	752	-	865
		1338				40	600	1338	816	424	1,28	13,74	5,45	750	897	-	1032
		1689				50	600	1689	1035	538	1,28	17,55	6,90	1000	997	-	1147
		1959				60	600	1959	1247	639	1,31	20,65	8,20	1250	1136	-	1306
11126	0750	0744	1188	YYYY	-0000	21	750	744	552	273	1,38	8,95	3,25	500	632	-	727
		1122				32	750	1122	828	437	1,25	13,40	5,10	750	804	-	925
		1338				40	750	1338	989	514	1,28	16,10	6,13	1000	962	-	1106
		1689				50	750	1689	1253	662	1,25	20,50	7,80	1250	1082	-	1244
		1959				60	750	1959	1483	783	1,25	24,40	9,20	1500	1192	-	1371

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

TYPES

- Straight (BSM-ES)

TUBES

- Horizontal, round Ø 15 mm

COLLECTORS

- Vertical, semi-round Ø 42 mm

COLOURS

- Stainless steel type 316L, matt brushed with grain 360

SPECIAL

- Standard with straight cover cap in stainless steel

BRACKETS

- Wall brackets standard

TECHNICAL

- Electrically laser welded (invisible weld seams)
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✗ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 46


CONNECTION

- ✓ One-point connection for one-pipe system (see p. 343)
- ✓ One-point connection for two-pipe system (see p. 343)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.



VASCO

RECOMMENDED CONNECTION (1188)



INCLUDED FREE OF CHARGE



standard, folding chrome plated drying and stacking rack

Other connection methods, see p. 43



MALVA STAINLESS STEEL

A timeless outperformer

The Malva Stainless Steel fills your intimate space with a soft, tranquil glow. The Malva concept in its most durable version, for a lifetime of enjoyment and 100% recyclable. A bathroom radiator that makes a statement: a timeless design with hard-wearing performance.

MALVA STAINLESS STEEL (BSM-ES)


DISCONTINUED ITEM



BSM-ES

HOW TO ORDER MALVA STAINLESS STEEL

Delivery time 15 - 30 working days
(transport duration not included)

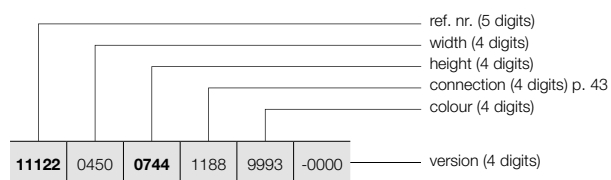

PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE MALVA STAINLESS STEEL						TECHNICAL DATA									STANDARD COLOUR	
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price stainless steel (€)	
REF. NR. MALVA STAINLESS STEEL BSM-ES : 11122																
11122	0450	0744	1188	9993	-0000	21	450	744	259	137	1,24	5,85	2,70	-	1243	
11122	0600	1122	1188	9993	-0000	32	600	1122	490	252	1,30	10,00	4,78	500	1703	
		40				600	1338	581	299	1,30	11,96	5,78	500	2039		
		50				600	1689	736	385	1,27	15,15	7,43	750	2264		

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

TYPES

- Straight (HX)

TUBES

- Horizontal, round 24 mm

COLLECTORS

- Vertical, rectangular, 56 x 34 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

BRACKETS

- Wall brackets standard
- White bracket is delivered with white radiator (RAL 9016) - chrome bracket with other colours

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✗ Pure electrical radiator prefilled
- ✓ Mixed radiator


TECHNICAL DRAWINGS

- See p. 46

CONNECTION

- ✓ One-point connection for one-pipe system (see p. 343)
- ✓ One-point connection for two-pipe system (see p. 343)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: 1/2" (inner thread)
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43




ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

INCLUDED FREE OF CHARGE



standard, folding chrome plated drying and stacking rack

PRADO

All of them functional and harmonious

Rectangular collectors and round tubes together form a smooth and sleek whole. The smart solid centre connection completes the style. A towel rail that can be quickly assembled with the right capacity to relax and enjoy your bathroom comfort.




PRADO (HX)



HX


HOW TO ORDER PRADO

Delivery time 15 - 30 working days
(transport duration not included)

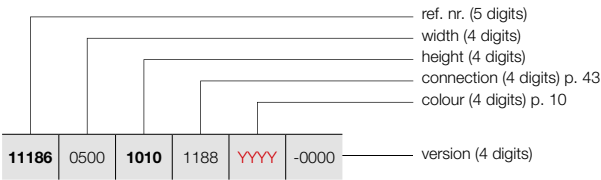

HOW TO ORDER STOCK RADIATOR PRADO

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE PRADO						TECHNICAL DATA									STANDARD COLOUR		OTHER COLOURS
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. PRADO HX : 11186																	
11186	0500	1010	1188	YYYY	-0000	21	500	1010	540	281	1,28	10,80	6,00	500	573	-	659
		1406				29	500	1406	745	387	1,28	14,75	8,40	750	697	11186-06	802
		1802				37	500	1802	953	496	1,28	19,00	10,90	1000	813	11186-04	935
		2022				42	500	2022	1072	560	1,27	21,40	12,20	1000	929	-	1068
11186	0600	1010	1188	YYYY	-0000	21	600	1010	632	329	1,28	12,16	6,80	500	606	-	697
		1406				29	600	1406	873	456	1,27	16,63	9,50	750	734	11186-03	844
		1802				37	600	1802	1117	590	1,25	21,32	12,14	1000	859	11186-05	988
		2022				42	600	2022	1256	657	1,27	24,02	13,78	1250	981	-	1128
11186	0750	1010	1188	YYYY	-0000	21	750	1010	768	403	1,26	14,20	8,00	750	647	-	744
		1406				29	750	1406	1060	557	1,26	19,45	11,15	1000	786	-	904
		1802				37	750	1802	1357	731	1,21	24,80	14,00	1250	931	11186-02	1071
		2022				42	750	2022	1525	793	1,28	27,95	16,15	1500	1062	-	1221

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

TYPES

- Straight (HRM) and curved (HRBM)

TUBES

- Horizontal, round Ø 22 mm

COLLECTORS

- Vertical, rear, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

SPECIAL

- The horizontal tubes of type HRBM are slightly bent (10°).

BRACKETS

- Wall brackets standard
- White bracket is delivered with white radiator (RAL 9016) - chrome bracket with other colours
- HRM: also available as free-standing radiator, see p. 40

TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 47


CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the bottom no flow tube is needed, this flow tube will therefore not be delivered.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.



VASCO

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

INCLUDED FREE OF CHARGE



standard, folding chrome plated
drying and stacking rack

AGAVE LACQUERED

Sleek, sophisticated and graceful heat


Exceptionally slender tubes, combined to an elegant structure that continues to fascinate and charm because of its soft, rounded shapes. Accentuated by the horizontal tubes that lie above the vertical collectors. If bathroom comfort is synonymous with intimacy, then intimacy is synonymous with Agave. An absolute eye catcher, that contributes to the comfortable atmosphere that you expect from a contemporary bathroom.



HRM

Delivery time 15 - 30 working days
(transport duration not included)

DISCONTINUED ITEM

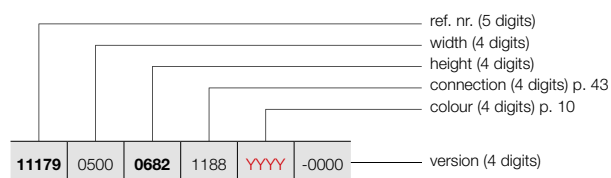

HRBM

PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE AGAVE LACQUERED						TECHNICAL DATA						STANDARD COLOUR	OTHER COLOURS			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	price colour (€)
REF. NR. AGAVE LACQUERED HRBM : 11179																
11179	0500	0682	1188	YYYY	-0000	17	500	682	402	217	1,21	7,60	3,60	300	594	683
		1114				27	500	1114	639	344	1,21	12,05	5,80	500	720	828
		1726				42	500	1726	968	516	1,23	18,60	8,90	1000	961	1105
		2014				50	500	2014	1149	616	1,22	22,40	9,20	1250	1139	1310
11179	0600	0682	1188	YYYY	-0000	17	600	682	481	259	1,21	8,65	4,11	500	625	719
		1114				27	600	1114	766	413	1,21	13,73	6,60	750	768	883
		1726				42	600	1726	1159	628	1,20	21,10	10,09	1250	1027	1181
		2014				50	600	2014	1345	725	1,21	25,27	10,95	1500	1221	1404
11179	0750	0682	1188	YYYY	-0000	17	750	682	601	322	1,22	10,24	4,88	500	671	772
		1114				27	750	1114	955	515	1,21	16,25	7,80	1000	832	957
		1726				42	750	1726	1447	800	1,16	24,87	11,89	1500	1124	1293
		2014				50	750	2014	1640	898	1,18	29,60	13,58	1500	1312	1509
11179	0850	0682	1188	YYYY	-0000	17	850	682	680	365	1,22	11,30	5,40	500	680	782
		1114				27	850	1114	1082	583	1,21	17,95	8,60	1000	850	978
		1726				42	850	1726	1639	920	1,13	27,40	13,10	1500	1157	1331
		2014				50	850	2014	1838	1016	1,16	32,50	15,35	1500	1350	1553

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)

EXPORT. Prices in Euro (excl. VAT)

Vasco

ASTER (HF)

VASCO



TYPES

- HF: 1 row of tubes

TUBES

- Horizontal, flat-oval 57,5 x 10 mm

COLLECTORS

- Vertical, rear, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

BRACKETS

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016 (see p. 40).

TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 47

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the bottom no flow tube is needed, this flow tube will therefore not be delivered.
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

ASTER

Minimalism in service of a maximum comfort

The Aster gives minimalism a new dimension with its sleek, contemporary look and its quick, controlled heat output which immerses you in an atmosphere of tranquility and well-being in no time. Now even easier to install and even more attractive as object thanks to the integrated centre connection (Aster HF).

HF: RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099

price € 218


Fittings, see p. 357



ASTER (HF)

HOW TO ORDER ASTER


Delivery time 15 - 30 working days
(transport duration not included)

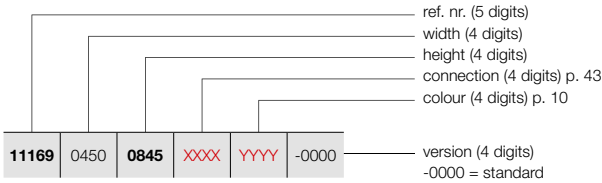

HF

HOW TO ORDER STOCK RADIATOR ASTER

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE ASTER						TECHNICAL DATA							STANDARD COLOUR		OTHER COLOURS		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. ASTER HF : 11169																	
11169	0450	0845	XXXX	YYYY	-0000	12	450	845	387	208	1,22	10,90	3,10	300	579	-	666
		1145				16	450	1145	512	272	1,24	14,75	4,35	500	702	-	807
		1445				21	450	1445	638	335	1,26	18,60	5,60	500	785	11169-02	903
		1805				27	450	1805	790	413	1,27	23,40	7,00	750	865	11169-04	995
11169	0600	1145	XXXX	YYYY	-0000	16	600	1145	652	351	1,21	17,50	5,10	500	765	11169-01	880
		1445				21	600	1445	812	435	1,22	22,75	6,60	750	881	11169-03	1013
		1805				27	600	1805	1006	531	1,25	29,06	8,41	1000	994	11169-05	1143
11169	0700	1805	XXXX	YYYY	-0000	27	700	1805	1145	611	1,23	32,83	9,36	1250	1080	-	1242
11169	0800	1805	XXXX	YYYY	-0000	27	800	1805	1281	690	1,21	36,60	10,30	1250	1156	-	1329
		2105				31	800	2105	1490	795	1,23	41,90	11,80	1500	1356	-	1559

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)



BANO (BM, BMR)

VASCO



TYPES

- Straight (BM) and curved (BMR)

TUBES

- Horizontal, round Ø 22 mm

COLLECTORS

- Vertical, D-profile 34 x 34 mm

COLOURS

- Standard colour white RAL 9016
- Not available in other colours

SPECIAL

- The horizontal tubes of type BMR are slightly bent (10°).

BRACKETS

- Wall brackets standard

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 48

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system (connection by way of the central connection)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)

BANO

Stylish enjoyment in the warmest room

Are you looking for inspiring radiators for your new construction or renovation, which will make your home stand out without running over your building budget? Bano is the solution.

RECOMMENDED CONNECTION (0018)



Other connection methods, see p. 43



ref. nr. 1182 101 0000 0099

price € 218

Fittings, see p. 357



Delivery time 15 - 30 working days
(transport duration not included)

The diagram shows the 11-digit ISBN structure with the following fields and labels:

- 1101**: version (4 digits)
- 0500**: colour (4 digits)
- 0702**: connection (4 digits) p. 43
- 0018**: height (4 digits)
- 9016**: width (4 digits)
- 0000**: ref. nr. (5 digits)



BMR

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

see table below

REFERENCE CODE CUSTOM MADE BANO						TECHNICAL DATA							STANDARD COLOUR		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock
REF. NR. BANO BM : 11101															
11101	0500	0702 1186 1714	0018	9016	-0000	15	500	702	347	185	1,22	4,90	3,43	300	11101-13
						25	500	1186	574	311	1,20	7,80	5,27	500	11101-04
						35	500	1714	823	439	1,23	11,10	7,51	750	11101-07
11101	0600	0702 1186 1714	0018	9016	-0000	15	600	702	409	218	1,22	5,50	3,89	300	-
						25	600	1186	676	366	1,20	8,90	6,03	750	11101-08
						35	600	1714	970	520	1,22	12,60	8,59	1000	11101-09
REF. NR. BANO BMR : 11104															
11104	0500	0702 1186 1714	0018	9016	-0000	15	500	702	347	185	1,22	6,45	3,43	300	-
						25	500	1186	574	311	1,20	10,72	5,27	500	-
						35	500	1714	823	439	1,23	15,33	7,51	750	-
11104	0600	0702 1186 1714	0018	9016	-0000	15	600	702	409	218	1,22	7,30	3,89	300	-
						25	600	1186	676	366	1,20	12,10	6,03	750	-
						35	600	1714	970	520	1,22	17,24	8,59	1000	11104-09

For heat outputs in other regimes, see p. 350 (correction factors)

BANO WITH CENTRAL CONNECTION (BMmm, BMRmm)

VASCO



TYPES

- Straight (BMmm) and curved (BMRmm)
- With central connection

TUBES

- Horizontal, round Ø 22 mm

COLLECTORS

- Vertical, D-profile 34 x 34 mm

COLOURS

- Standard colour white RAL 9016
- Not available in other colours

SPECIAL

- The horizontal tubes of type BMRmm are slightly bent (10°).

BRACKETS

- Wall brackets standard

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 48

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)

BANO WITH CENTRAL CONNECTION

Powerful eyecatcher

Bano offers the perfect solution for every room in the house, from bathroom to kitchen. Not standard heating elements, but stylish interior objects.

RECOMMENDED CONNECTION (1008)



Other connection methods, see p. 43



ref. nr. 1182 001 0000 9016
price € 129
Fittings, see p. 357




ref. nr. 11911630102
price € 44



Delivery time 15 - 30 working days
(transport duration not included)

BANO WITH CENTRAL CONNECTION (BMmm, BMRmm)

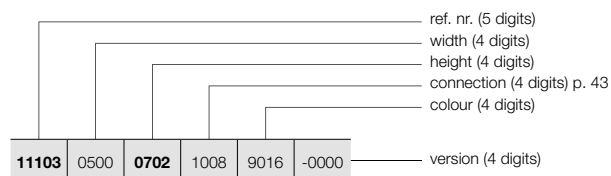


BMmm



BMRmm

HOW TO ORDER STOCK RADIATOR BANO WITH CENTRAL CONNECTION

Delivery time 5 working days
(transport duration not included)



PRODUCT GROUP: BATHROOM

REFERENCE CODE CUSTOM MADE BANO WITH CENTRAL CONNECTION						TECHNICAL DATA							STANDARD COLOUR		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock
REF. NR. BANO WITH CENTRAL CONNECTION BMmm : 11103															
11103	0500	0702 1186 1714	1008	9016	-0000	15	500	702	347	185	1,22	4,90	3,43	300	11103-02
						25	500	1186	574	311	1,20	7,80	5,27	500	11103-03
						35	500	1714	823	439	1,23	11,10	7,51	750	11103-05
11103	0600	0702 1186 1714	1008	9016	-0000	15	600	702	409	218	1,22	5,50	3,89	300	11103-08
						25	600	1186	676	366	1,20	8,90	6,03	750	11103-04
						35	600	1714	970	520	1,22	12,60	8,59	1000	11103-06
REF. NR. BANO WITH CENTRAL CONNECTION BMRmm : 11105															
11105	0500	0702 1186 1714	1008	9016	-0000	15	500	702	347	185	1,22	6,45	3,43	300	-
						25	500	1186	574	311	1,20	10,72	5,27	500	-
						35	500	1714	823	439	1,23	15,33	7,51	750	-
11105	0600	0702 1186 1714	1008	9016	-0000	15	600	702	409	218	1,22	7,30	3,89	300	-
						25	600	1186	676	366	1,20	12,10	6,03	750	-
						35	600	1714	970	520	1,22	17,24	8,59	1000	11105-07

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)

Prices on demand



TUBES

- Horizontal, square 25 x 25 mm

COLLECTORS

- Vertical, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

BRACKETS

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016 (see p. 40).

TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 49

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

CARRÉ BATHROOM


A one piece bathroom radiator

The Carré Bathroom, now also with centre connection, continues to charm us by its pure, architectural design and its striking simplicity. Everything about this bathroom radiator is unique and unsurpassed: the perfect uniformity, the surprisingly high heat output and superior technicality. Because behind the automatic design hides a lot of technological ingenuity that is passed down to the smallest details.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail straight (chrome)

ref. nr. see p. 42

price € 187

Other accessories, see p. 42



Delivery time 15 - 30 working days
(transport duration not included)

CB

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

see table below

PRODUCT GROUP: STEEL

REFERENCE CODE CUSTOM MADE CARRÉ BATHROOM						TECHNICAL DATA					STANDARD COLOUR		OTHER COLOURS				
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. CARRÉ BATHROOM CB : 11128																	
11128	0500	0745	XXXX	YYYY	-0000	21	500	745	438	235	1,22	12,80	6,20	300	657	-	756
		40				500	1375	747	399	1,23	22,95	11,80	750	998	11128-12	1148	
		50				500	1735	925	493	1,23	29,00	14,80	1000	1183	11128-21	1360	
11128	0600	0745	XXXX	YYYY	-0000	21	600	745	521	278	1,23	14,35	7,30	500	690	-	794
		40				600	1375	886	473	1,23	27,35	13,90	750	1051	-	1209	
		50				600	1735	1089	581	1,23	33,35	17,20	1000	1241	11128-24	1427	

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)



TUBES

- AB: Horizontal, rectangular 45 x 20 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

SPECIAL

- The Arche is awarded with the Design Plus Award 2005, Reddot Design Award 2006, Silver Award Designpreis Deutschland 2006 and nominated for the Henry van de Velde prize 2005.
- Radiator with spaces

BRACKETS

- Wall brackets standard (telescopic)

TECHNICAL

- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 120°C

ELECTRICAL

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 49

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: 1/2" (inner thread)

ARCHE BATHROOM


Square, the most beautiful and most practical

A classic example of smart applied design, practical and easy to assemble thanks to the intelligent centre connection that connects the form and efficiency in a unique way. The sleek, soothing character enhances the wellness feeling. The customized heat release, the thoughtful accessories and the good relations with the low temperature system are all guarantees for a sustainable invention with a lasting return.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099
price € 218
 Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



hook (chrome)
 ref. nr. see p. 42
price € 87
 Other accessories, see p. 42



Delivery time 15 - 30 working days
(transport duration not included)

ref. nr. (5 digits)
width (4 digits)
height (4 digits)
connection (4 digits) p. 43
colour (4 digits) p. 10

11259 0500 0870 1188 YYY YYY -0000

version (4 digits)

Delivery time 5 working days
(transport duration not included)

ref. nr. (5 digits)

see table below

REFERENCE CODE CUSTOM MADE ARCHE BATHROOM						TECHNICAL DATA						STANDARD COLOUR		OTHER COLOURS			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)
REF. NR. ARCHE BATHROOM AB : 11259																	
11259	0500	0870	1188	YYYY	-0000	16	500	870	502	264	1,26	12,20	6,55	-	738	-	849
		1470				28	500	1470	805	419	1,28	20,65	11,45	-	1048	11259-04	1205
		1870				36	500	1870	1022	531	1,28	25,65	14,15	-	1216	11259-02	1398
11259	0600	0870	1188	YYYY	-0000	16	600	870	588	311	1,25	14,10	7,58	-	768	-	883
		1470				28	600	1470	942	487	1,29	24,03	13,35	-	1094	11259-05	1258
		1870				36	600	1870	1197	622	1,28	29,93	17,05	-	1269	11259-03	1459
11259	0700	0870	1188	YYYY	-0000	16	700	870	672	357	1,24	16,00	8,60	-	786	-	904
		1470				28	700	1470	1077	557	1,29	27,40	15,25	-	1118	-	1286
		1870				36	700	1870	1368	711	1,28	34,20	19,95	-	1295	-	1489

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

Vasco



TUBES

- Horizontal, rectangular 45 x 20 mm

COLLECTORS

- Vertical, rear, round Ø 35 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

BRACKETS

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016 (see p. 40).

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 120°C

ELECTRICAL (available versions: see chapter electrical radiators, p. 52)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 50

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)
- ✓ Two-point connection for two-pipe system (standard) (see p. 342)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 345.

ZANA BATHROOM


Heat in its purest form

The Zana Bathroom is a radiator concept that combines tradition and trends in an extremely pure design. A comfort solution that perfectly comes to its right in all respects thanks to the practical, integrated centre connection. The timeless, transparent structure and the refined design make the Zana Bathroom a desired object, also in smaller bathrooms.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 43



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 357

RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION



towel rail straight (chrome)

ref. nr. see p. 42

price € 187

Other accessories, see p. 42



Delivery time 15 - 30 working days
(transport duration not included)

ref. nr. (5 digits)
width (4 digits)
height (4 digits)
connection (4 digits) p. 43
colour (4 digits) p. 10

11248 0500 0984 xxxx yyyy -0000

version (4 digits)

REFERENCE CODE CUSTOM MADE ZANA BATHROOM							TECHNICAL DATA					STANDARD COLOUR	OTHER COLOURS				
							tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	price colour (€)
REF. NR. ZANA BATHROOM ZBD : 11248																	
11248	0500	0984 1504 1824	XXXX	YYYY	-0000		21	500	984	658	360	1,18	19,35	8,80	500	859	988
							32	500	1504	976	531	1,19	29,45	12,35	1000	1254	1442
							40	500	1824	1189	647	1,19	35,67	14,53	1250	1548	1780
11248	0600	0984 1504 1824	XXXX	YYYY	-0000		21	600	984	788	436	1,16	22,10	10,40	750	902	1037
							32	600	1504	1151	633	1,17	33,70	15,80	1250	1318	1516
							40	600	1824	1383	757	1,18	40,84	19,12	1500	1637	1883

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 350 (correction factors)
EXPORT. Prices in Euro (excl. VAT)

Vasco

BATHROOM RADIATORS BRACKETS / FREE-STANDING INSTALLATION IN OPTION

PRODUCT GROUP: ACC SUP

BRACKETS		COLOUR	REF. NR.	€
HF / CB / ZBD				
WALL SETUP	4 brackets	RAL 7016	1187 007 0000 7016	41
FREE-STANDING INSTALLATION				
FREE-STANDING INSTALLATION		BSM-S		
		RAL 9016	1181 003 0000 9016	86
		COLOUR	1181 003 0000 XXXX	99
• free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. • free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. • When placing feet under a radiator, it must be checked whether this is possible in combination with the placement of a valve from the Vasco range, for that specific set-up.				
FREE-STANDING INSTALLATION		HDM		
		RAL 9016	1181 001 0000 9016	86
		COLOUR	1181 001 0000 XXXX	99
• free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 1 foot (H = 150 mm) and 1 roset in the colour RAL 9016. • free-standing radiators in other colours: 2 separate lateral supports, 1 foot (H = 150 mm) in the colour of the radiator and 1 chrome plated roset. • When placing feet under a radiator, it must be checked whether this is possible in combination with the placement of a valve from the Vasco range, for that specific set-up.				
FREE-STANDING INSTALLATION		HRM		
		RAL 9016	1181 004 0000 9016	86
		COLOUR	1181 004 0000 XXXX	99
• free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. • free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. • When placing feet under a radiator, it must be checked whether this is possible in combination with the placement of a valve from the Vasco range, for that specific set-up.				

EXPORT. Prices in Euro (excl. VAT)

PRODUCT GROUP: ACC SUP

ACCESSORIES		COLOUR	REF. NR.	€
THERMOSTATIC HEAD		BMmm / BMRmm		
		WHITE	11911630102	44
THERMOSTATIC HEAD		BMmm / BMRmm		
		CHROME	11911631102	63

PRODUCT GROUP: ACC

ACCESSORIES		WIDTH TOWEL RAIL	COLOUR*	REF. NR.	€
TOWEL RAIL MULTI+ RIGHT		O-NP			
		600 mm	S600	1183 734 0000 0600	204
		600 mm	M301	1183 734 0000 0301	204
		600 mm	RAL 9005 ^S	1183 734 0000 9005	204
• h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;					
TOWEL RAIL MULTI+ LEFT		O-NP			
		600 mm	S600	1183 735 0000 0600	204
		600 mm	M301	1183 735 0000 0301	204
		600 mm	RAL 9005 ^S	1183 735 0000 9005	204
• h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;					
TOWEL RAIL		O-P / O-NP			
		372 mm	CHROME	1183 274 0000 0099	160
		372 mm	S600	1183 274 0000 0600	160
		372 mm	RAL 9005 ^M	1183 274 0000 9005	160
• h = 55 mm; b = 372 mm; d = 56 mm; a = 50 mm;					
FOLDING DRYING AND STACKING RACK		BSM-S / BSRM-S / BSM-ES			
			CHROME	1183 001 0000 0099	135
		HDM / HDRM / HRM / HRBM			
			CHROME	1183 002 0000 0099	135
		HX			
			CHROME	1183 003 0000 0099	135
• Standard included with Malva Lacquered, Prado, Iris, Agave Lacquered.					
• 380 x 158 mm					

- Standard included with Malva Lacquered, Prado, Iris, Agave Lacquered.
- 380 x 158 mm

^S structure black
^M matt black

* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.

Mounting instructions accessories: see www.vasco.eu

EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall
d = distance front of the accessory up to front of the radiator
c = distance between wall to back towel bar
a = distance accessory up to the radiator
available from stock

BATHROOM RADIATORS ACCESSORIES

IN OPTION


PRODUCT GROUP: ACC

ACCESSORIES		COLOUR*	REF. NR.	€
SQUARE HOOK		CB		
		CHROME	1183 500 0000 0099	68
• h = 24 mm; b = 24 mm; d = 65 mm				
TOWEL RAIL STRAIGHT		CB		
		CHROME	1183 207 0000 0099	187
• h = 24 mm; b = 720 mm (easy adjustable); d = 66 mm; a = 48 mm				
HOOK		AB / ZBD		
		CHROME	1183 410 0000 0099	87
• h = 70 mm; b = 70 mm; d = 59 mm; a = 51 mm;				
TOWEL RAIL STRAIGHT		ZBD		
		CHROME	1183 228 0000 0099	187
• h = 22 mm; b = 720 mm (easy adjustable); d = 75 mm; a = 56 mm				

Mounting instructions accessories: see www.vasco.eu
EXPORT. Prices in Euro (excl. VAT)


d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator
available from stock

ONI: O-P / O-NP



ASTER: HF (NON STOCK)

BANO: BM / BMR

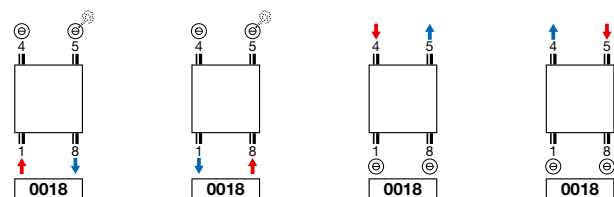

MALVA LACQUERED: BSM-S / BSRM-S

MALVA STAINLESS STEEL: BSM-ES


PRADO: HX

IRIS: HDM / HDRM / HDM-BL-MIX


AGAVE LACQUERED: HRM / HRBM

ASTER: HF / HF-BL-MIX (STOCK)


ASTER: HF / HF-BL-MIX (NON STOCK)

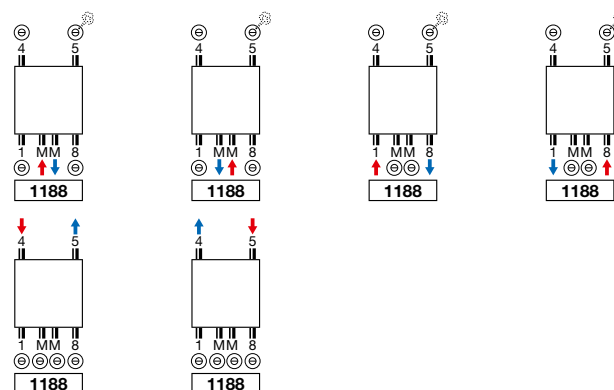


BANO with central connection: BMmm / BMRmm

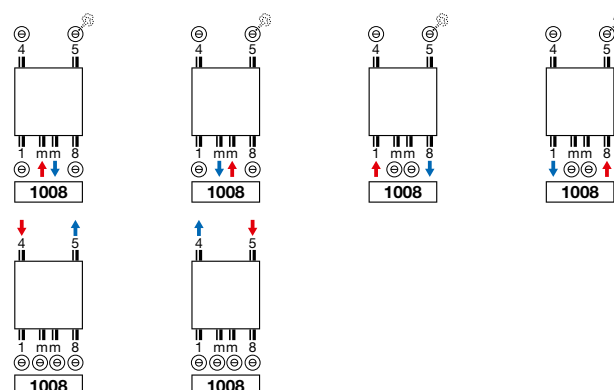


CARRÉ BATHROOM: CB (STOCK) / CB (NON STOCK)

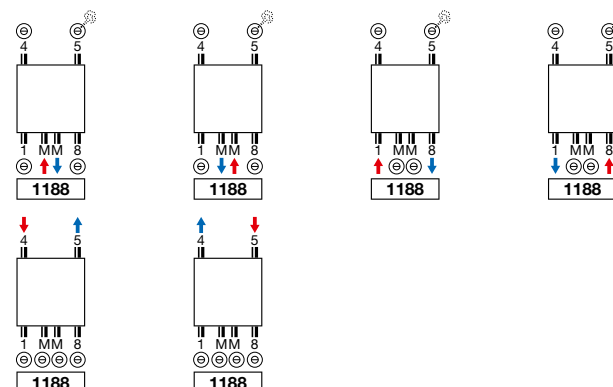


CARRÉ BATHROOM: CB (NON STOCK)

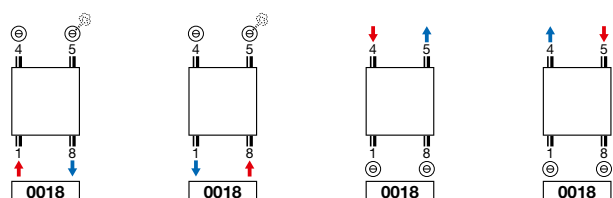

ARCHE BATHROOM: AB

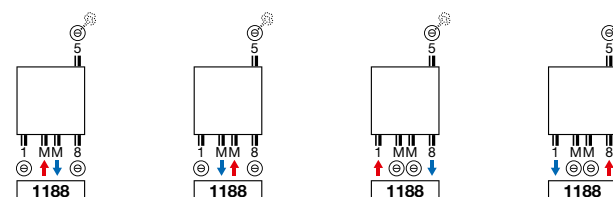

ZANA BATHROOM: ZBD

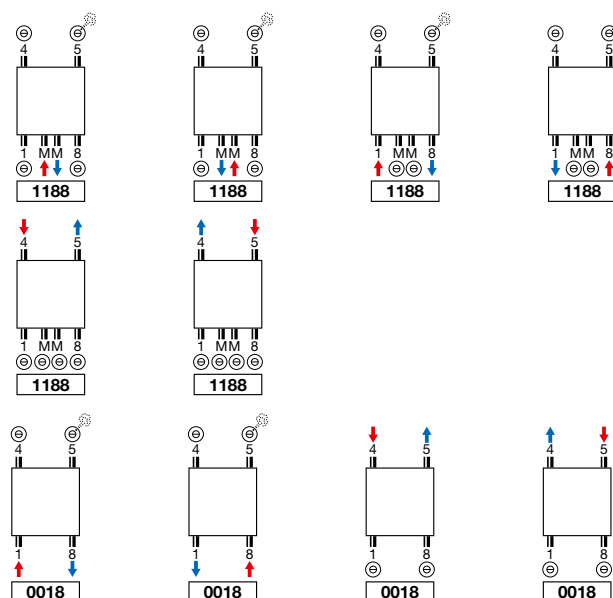

Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.

Technical drawing of the O-P 50 bracket, showing side and top views with dimensions.

Side View Dimensions:

- Overall height: 1800
- Height from top to first hole center: 95
- Height between hole centers: 95
- Height from second hole center to bottom: 668
- Overall width: 360
- Bottom flange width: 50
- Bottom flange thickness: 20
- Bracket height: 145
- Bracket width: 60
- Bracket offset: 69
- Bracket angle: 120
- Bracket offset: 20

Top View Dimensions:

- Overall width: 270
- Bracket width: 60

Bottom View Dimensions:

- Overall width: 270
- Bracket width: 60


Legend:

- O-P 50
- Centre between the connections
- 50
- Centre between the brackets
- L-270

Technical drawing of the O-NP connection system. The left side shows a side view of the vertical assembly with dimensions: 145, 120, 60, 69, and a total height of H - 180. The bottom right corner shows a 20mm dimension. The right side shows three front views of the connection plate with dimensions: 270, 2000, 1800, 1400, 50, and L. The top right shows three small detail views of the connection points with a 270mm dimension.

	O-NP
Centre between the connections	50
Centre between the brackets	L-270

IRIS (HDM, HDRM)

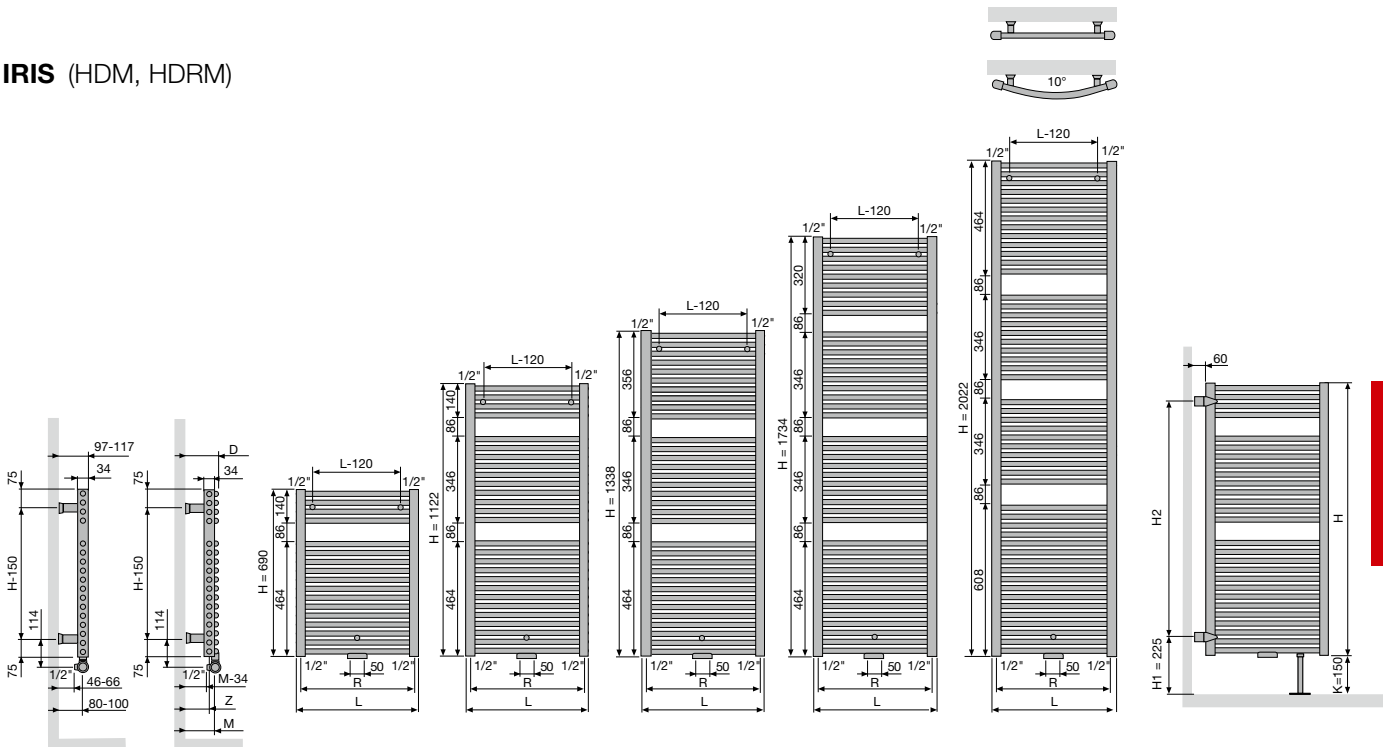


	Width (L)	450	500	600	750	900
Centre between the connections at the bottom 18 (R)		416	466	566	716	866
Centre between the brackets	L-120	H-150				

	Width (L)	446	496	595	744	893
Centre between the connections at the bottom 18 (R)		412	462	561	710	859
Distance between wall and connection 1-8 (Z)		84-94	79-89	77-87	72-82	70-80
Distance between wall and middle of MM valve (M)		102-112	102-112	102-112	108-118	110-120
Distance between wall and front of the radiator (D)		113-123	113-123	113-123	119-129	121-131
Centre between the brackets	L-120	H-150				

	Height (H)	690	1122	1338	1734	2022
H2		540	972	1188	1584	1872

MALVA LACQUERED (BSM-S, BSRM-S)

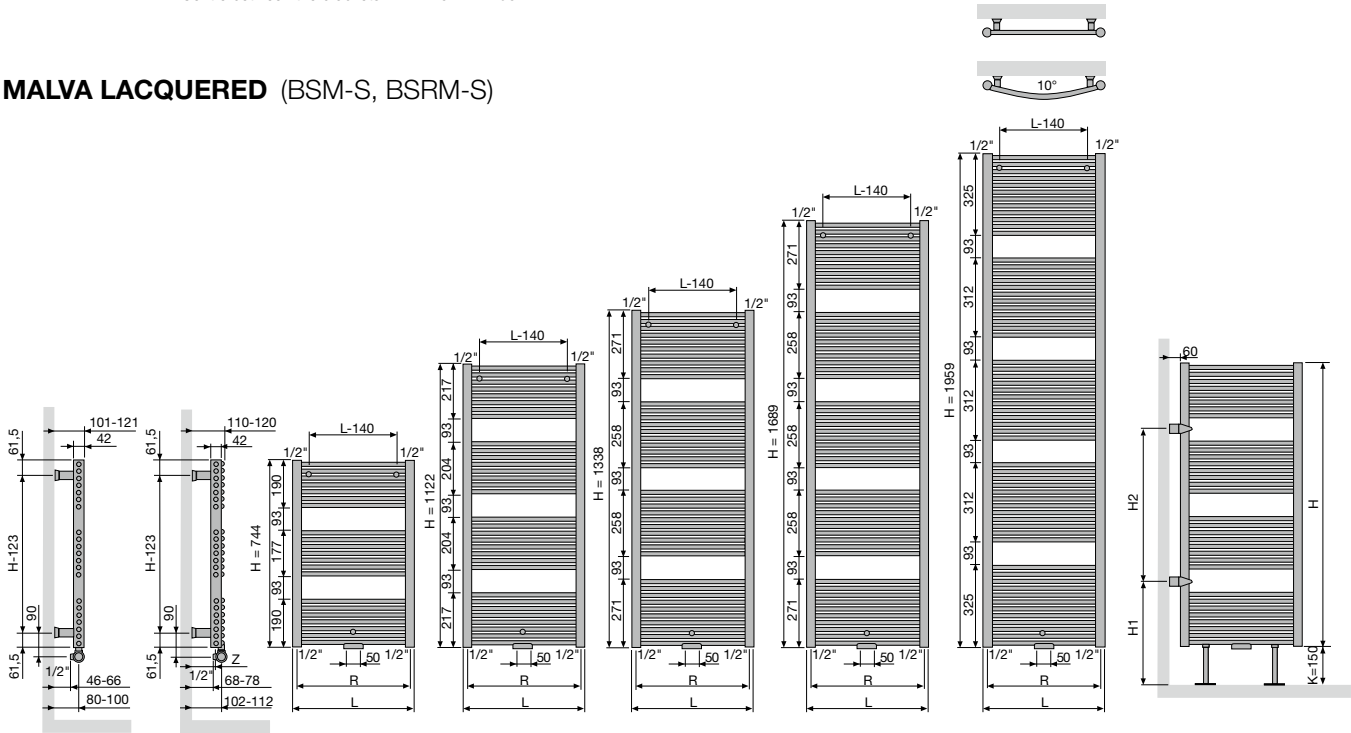


	Width (L)	450	500	600	750
Centre between the connections at the bottom 18 (R)		408	458	558	708
Centre between the brackets	L-140	H-123			

	Width (L)	446	496	595	744
Centre between the connections at the bottom 18 (R)		406	456	555	704
Distance between wall and connection 1-8 (Z)		78-88	76-86	72-82	67-78
Centre between the brackets	L-140	H-123			


	Number of tubes	21	32	40	50	60
H1		387	414	468	468	522
H2		270	594	702	1053	1215

MALVA STAINLESS STEEL (BSM-ES)

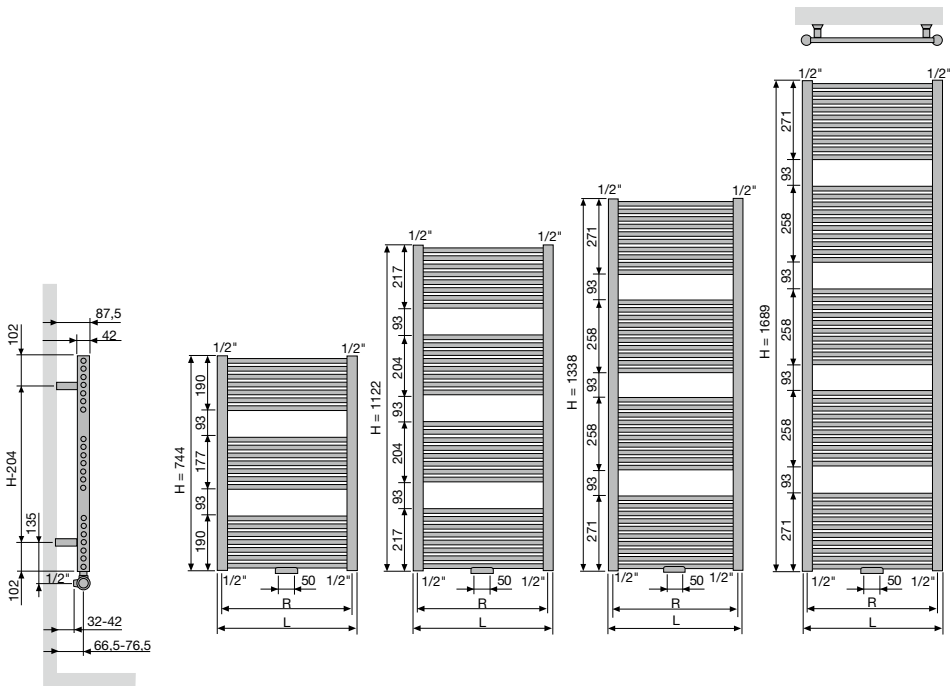


BSM-ES			
Width (L)	450	600	750
Centre between the connections at the bottom (R)	408	558	708
Centre between the brackets	H-204		

PRADO (HX)

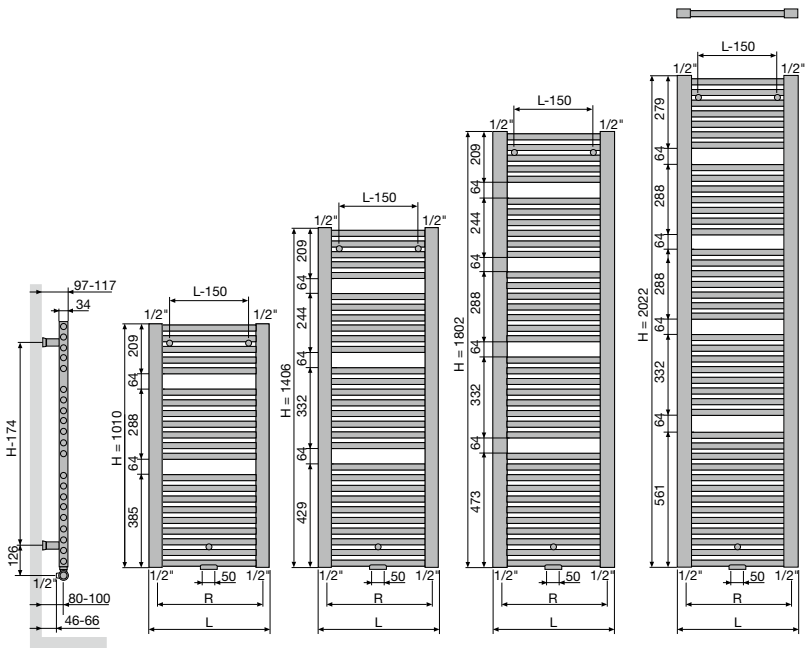

HX			
Width (L)	500	600	750
Centre between the connections at the bottom (R)	444	544	694
Centre between the brackets	L-150	H-174	

AGAVE LACQUERED (HRM, HRBM)

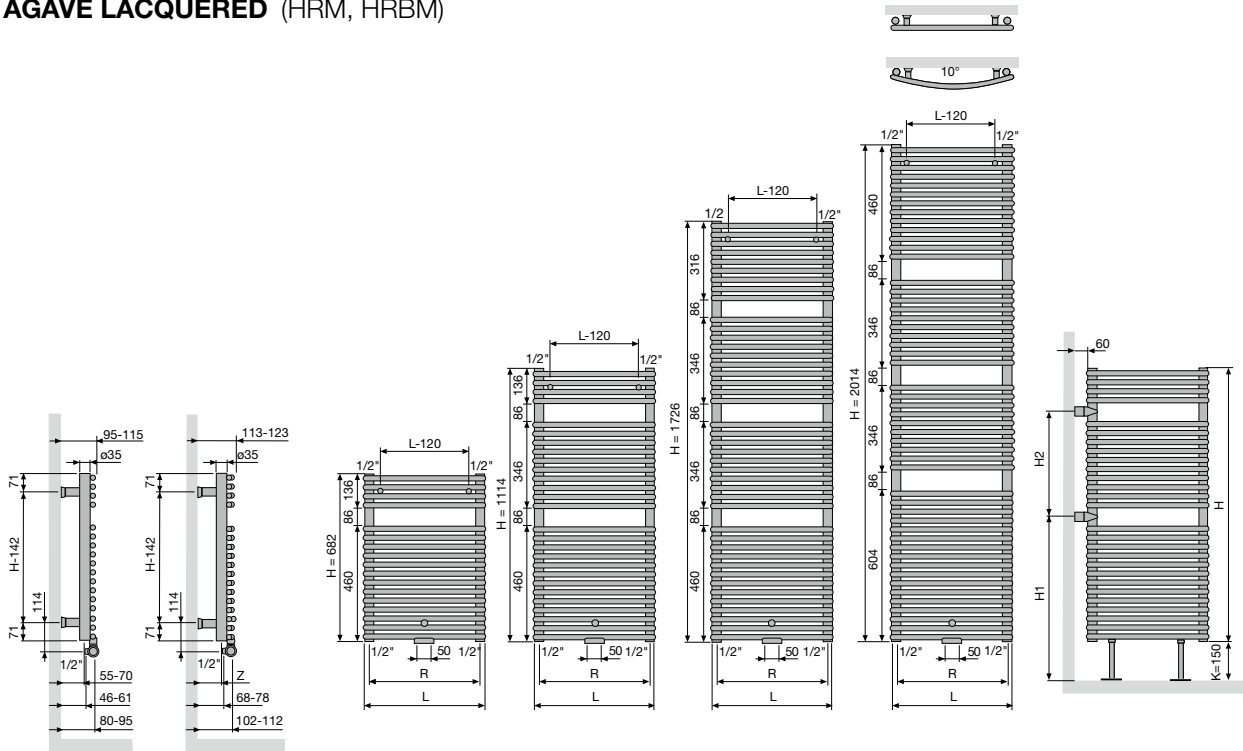


HRM			
	Width (L)	500	600
Centre between the connections at the bottom 18 (R)	460	560	810
Centre between the brackets	L-120	H-142	

HRBM			
	Width (L)	498	597
Centre between the connections at the bottom 18 (R)	450	550	800
Distance between wall and connection 1-8 (Z)	60-70	56-66	53-63
Centre between the brackets	L-120	H-142	


FREE-STANDING HRM			
Number of tubes	27	42	50
H	1114	1726	2014
H1	653	653	797
H2	432	864	864

ASTER (HF)

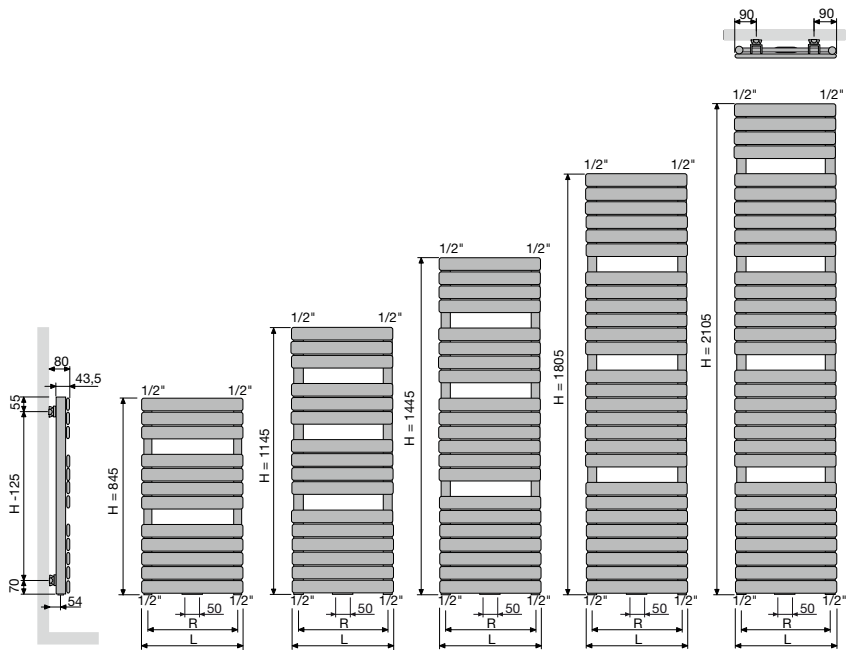


HF			
	Width (L)	450	600
Centre between the connections at the bottom 18 (R)	410	560	760
Centre between the brackets	H-125		

BANO (BM, BMR)

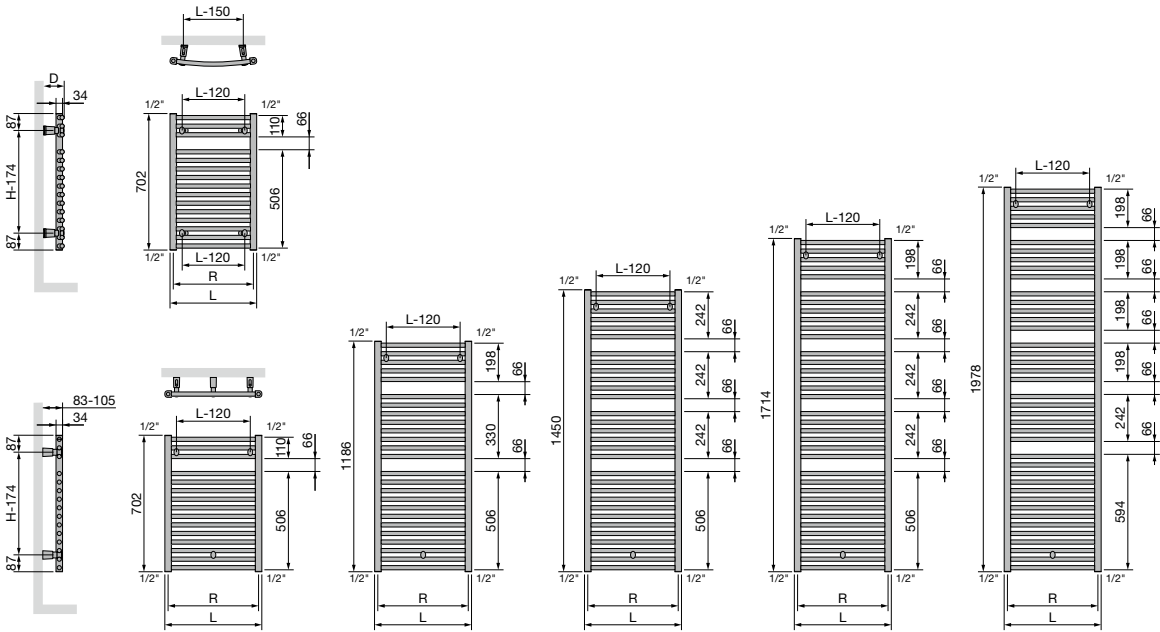


BM					BMR				
Width (L)	450	500	600	750	Width (L)	446	495	595	744
Centre between the connections at the bottom 18 (R)	416	466	566	716	Centre between the connections at the bottom 18 (R)	412	461	561	710
Centre between the brackets	L-120	H-174			Distance between wall and front of the radiator (D)	88-108	89-109	95-115	105-125
					Centre between the brackets	L-150	H-174		

BANO with central connection (BMmm, BMRmm)

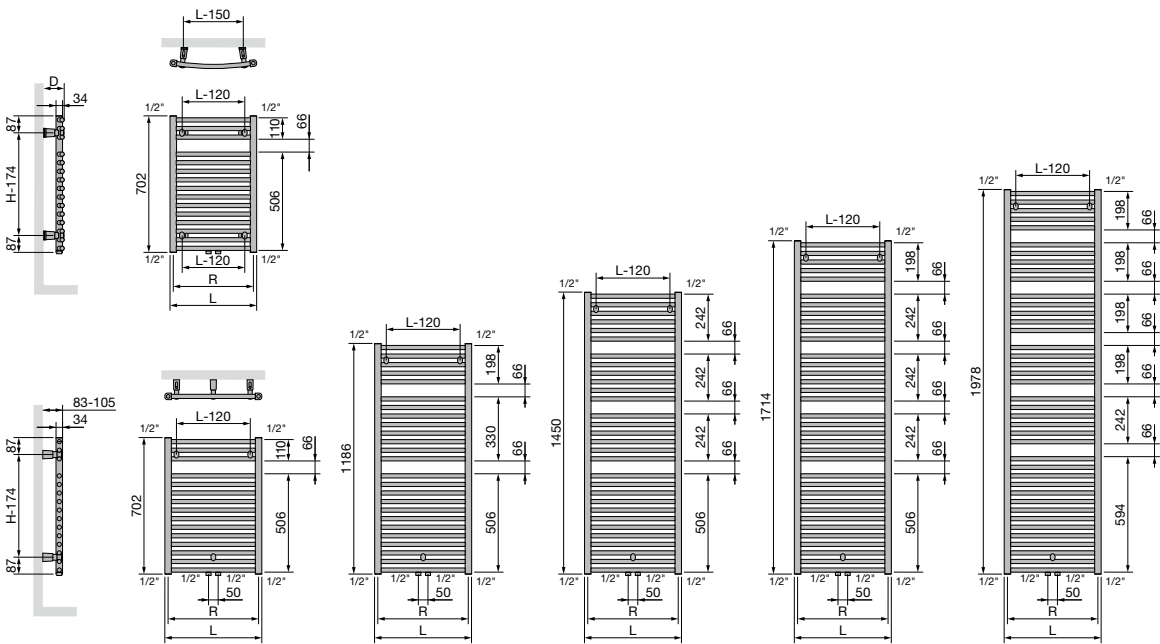


BMmm					BMRmm				
Width (L)	450	500	600	750	Width (L)	446	495	595	744
Centre between the connections at the bottom 18 (R)	416	466	566	716	Centre between the connections at the bottom 18 (R)	412	461	561	710
Centre between the brackets	L-120	H-174			Distance between wall and front of the radiator (D)	88-108	89-109	95-115	105-125
					Centre between the brackets	L-150	H-174		

CARRÉ BATHROOM (CB)

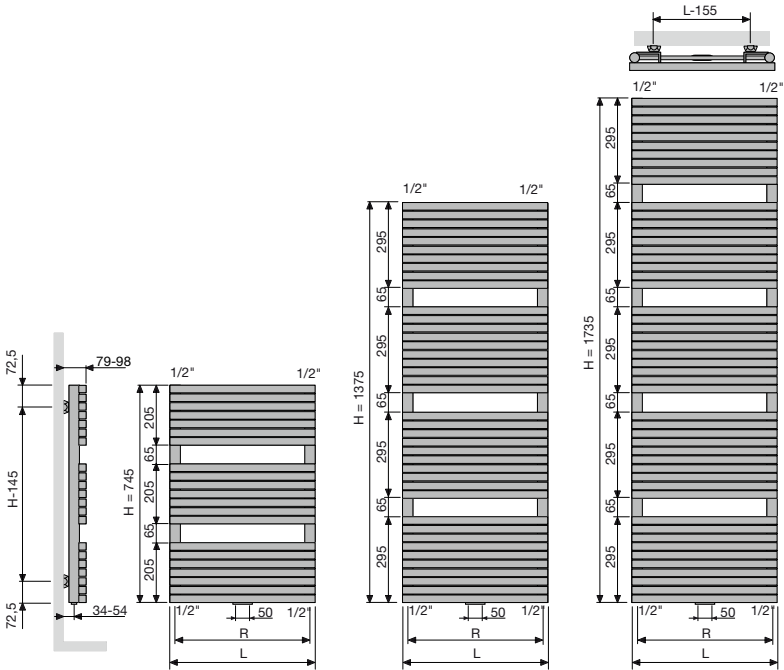


CB			
Width (L)	500	600	
Centre between the connections at the bottom (R)	465	565	
Centre between the brackets	L-155	H-145	

ARCHE BATHROOM (AB)

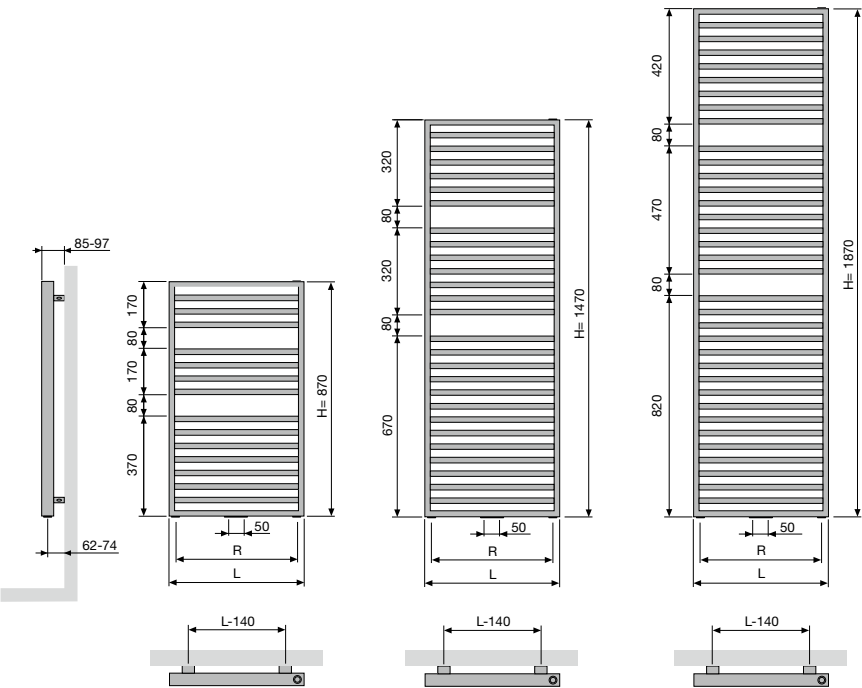

AB			
Width (L)	500	600	700
Centre between the connections at the bottom (R)	400	500	600
Centre between the brackets	L-140	H-120	

ZANA BATHROOM (ZBD)

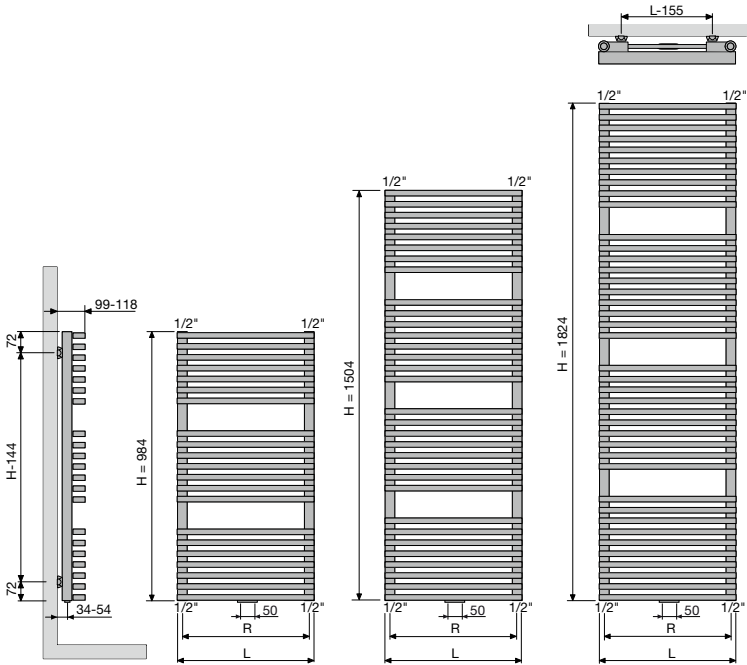

ZBD		
Width (L)	500	600
Centre between the connections at the bottom (R)	465	565
Centre between the brackets	L-155	H-144