
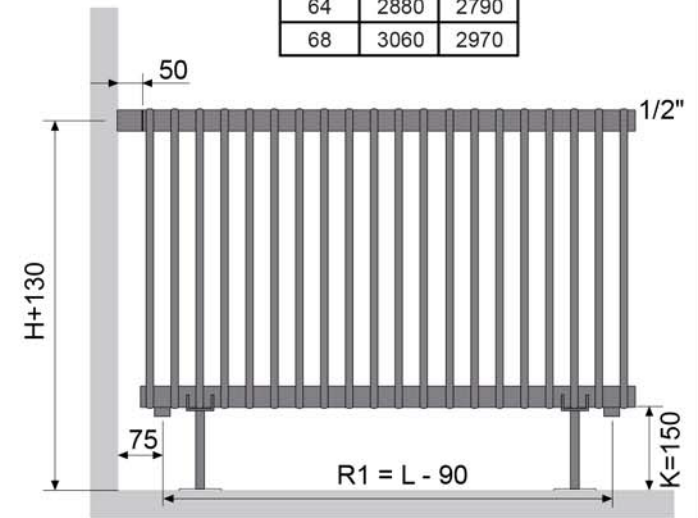
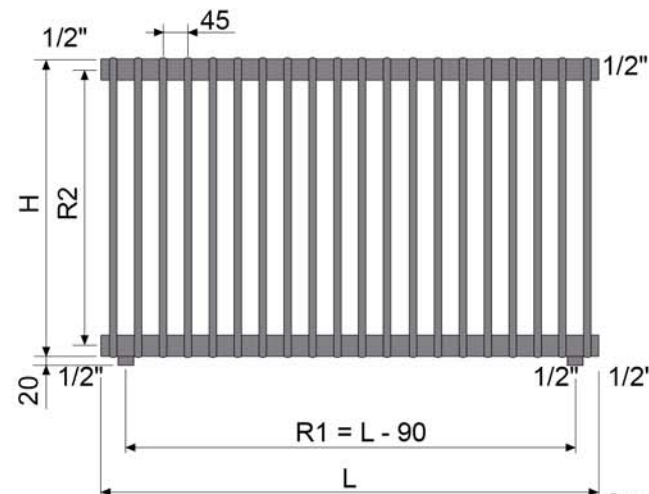
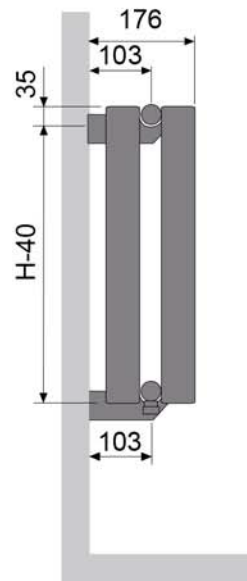
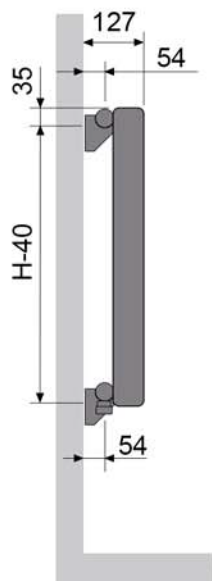
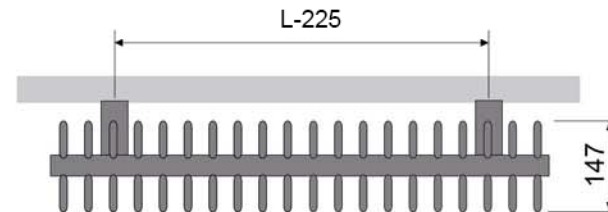


# TH1 / TH2

Werkdruk : Max. 4 bar  
 Betriebsdruck : Max. 4 bar  
 Pression de service : Max. 4 bar  
 Operating pressure : Max. 4 bar  
 Presión : Max. 4 bar

N	L	R1
12	540	450
14	630	540
16	720	630
18	810	720
20	900	810
22	990	900
24	1080	990
26	1170	1080
28	1260	1170
32	1440	1350
36	1620	1530
40	1800	1710
44	1980	1890
48	2160	2070
52	2340	2250
56	2520	2430
60	2700	2610
64	2880	2790
68	3060	2970

H	400	500	600	700	800	900
R2	365	465	565	665	765	865

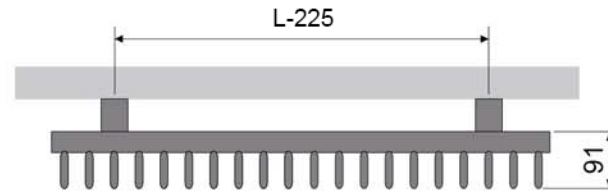

Bevestigingsmateriaal zit in de verpakking of tussen de buizen van de radiator.  
 Le matériel de fixation se trouve dans l'emballage ou entre les conduites du radiateur.  
 Mounting accessories are included in the packaging or inserted between the radiator pipes.  
 Das Befestigungsmaterial ist der Verpackung beigelegt oder befindet sich zwischen den Heizkörperrohren.  
 Akcesoria montażowe zostały zapakowane lub umieszone między rurami kaloryfera.  
 Il materiale di fissaggio si trova nella confezione o tra i tubi del radiatore.