

# Aluminium wall duct

## Description

Vasco's insulated air ducts and accessories, combined with its other ventilation products, offer a unique low-noise ventilation system. These components have been specially developed to meet the increasingly stringent requirements for thermal insulation and noise reduction in living spaces, which apply to ventilation systems with heat recovery. The insulated components should be applied at the external connection of the ventilation system.

The Vasco aluminium wall duct is available in two colours: white (RAL 9016) and black (RAL 9005).


It can be used for all external connections with an internal diameter of Ø 125, 170 and 200 mm.




## Technical specifications

Graph of pressure losses through aluminium wall duct

### Supply

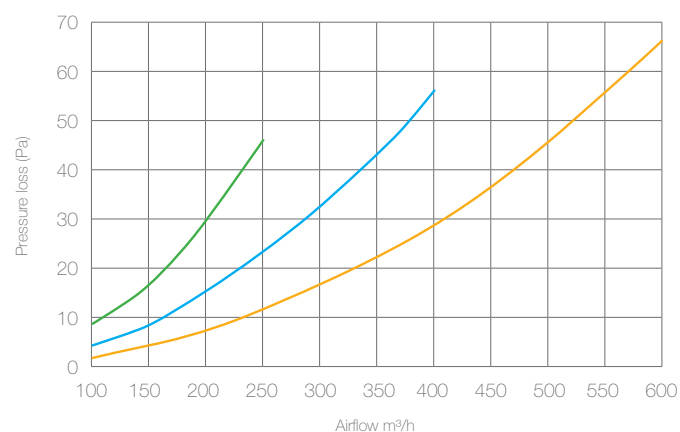

### Exhaust

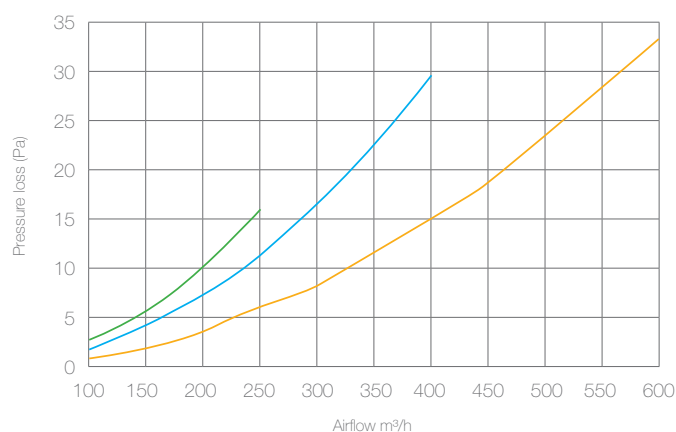

Wall duct Ø 255/200




Wall duct Ø 200/170

Wall duct Ø 160/125

# Aluminium wall duct


## Technical specifications

Proportion of passage grilles <-> insulated pipe


Name	Wall duct Ø 160/125	Wall duct Ø 200/170	Wall duct Ø 255/200
Inner diameter Ø	125 mm	170 mm	200 mm
Ratio grids/tube	153%	82%	78%
			

## Dimensioned drawings


Wall duct Ø 160/125

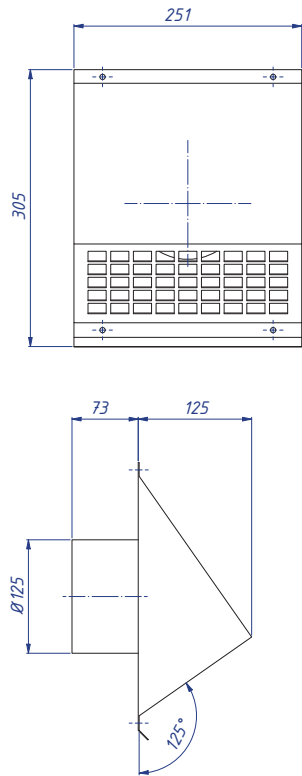

Wall duct Ø 200/170

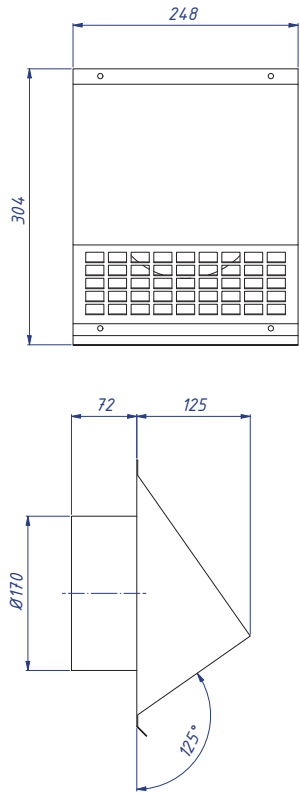

Wall duct Ø 255/200

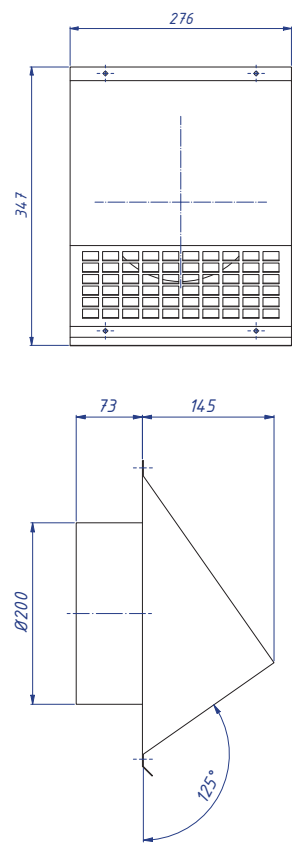

Dimensions in mm