



RITMO

COLUMN RADIATORS



VASCOGROUP



is a comprehensive provider of heating and ventilation solutions throughout the world, especially for residential applications. Its best-known brands are Vasco, Brugman and Superia. Vasco is a leading producer of designer radiators, ventilation and underfloor heating, and market leader in bathroom radiators (Benelux). Brugman and Superia are high-quality brands for panel radiators and belong to the absolute top in their segment. Vasco Group develops and optimises improved technologies and products for the indoor climate of the end user. This is achieved by focusing strongly on the individual needs of the end customer.

The search for alternative materials, novel designs and innovative production methods has already earned Vasco several awards and prizes. The headquarters is established in Dilsen.

The production plants are located in Tubbergen (Netherlands), Dilsen (Belgium) and Legnica (Poland). Vasco Group has ca. 500 employees and is part of the Swiss Arbonia Group.

ARBONIA 
www.arbonia.com

TOTAL PROVIDER OF RADIATORS, VENTILATION, UNDERFLOOR HEATING AND COOLING:





WWW.VASCO.EU

RITMO

CONTEMPORARY HEATING COMFORT IN A RETRO LOOK

The authentic character of the Ritmo column radiator has been embraced by countless lovers of design. Vasco knows better than anyone that heating comfort and design can go hand in hand. Designer radiators with a retro look that guarantee an optimal indoor climate.

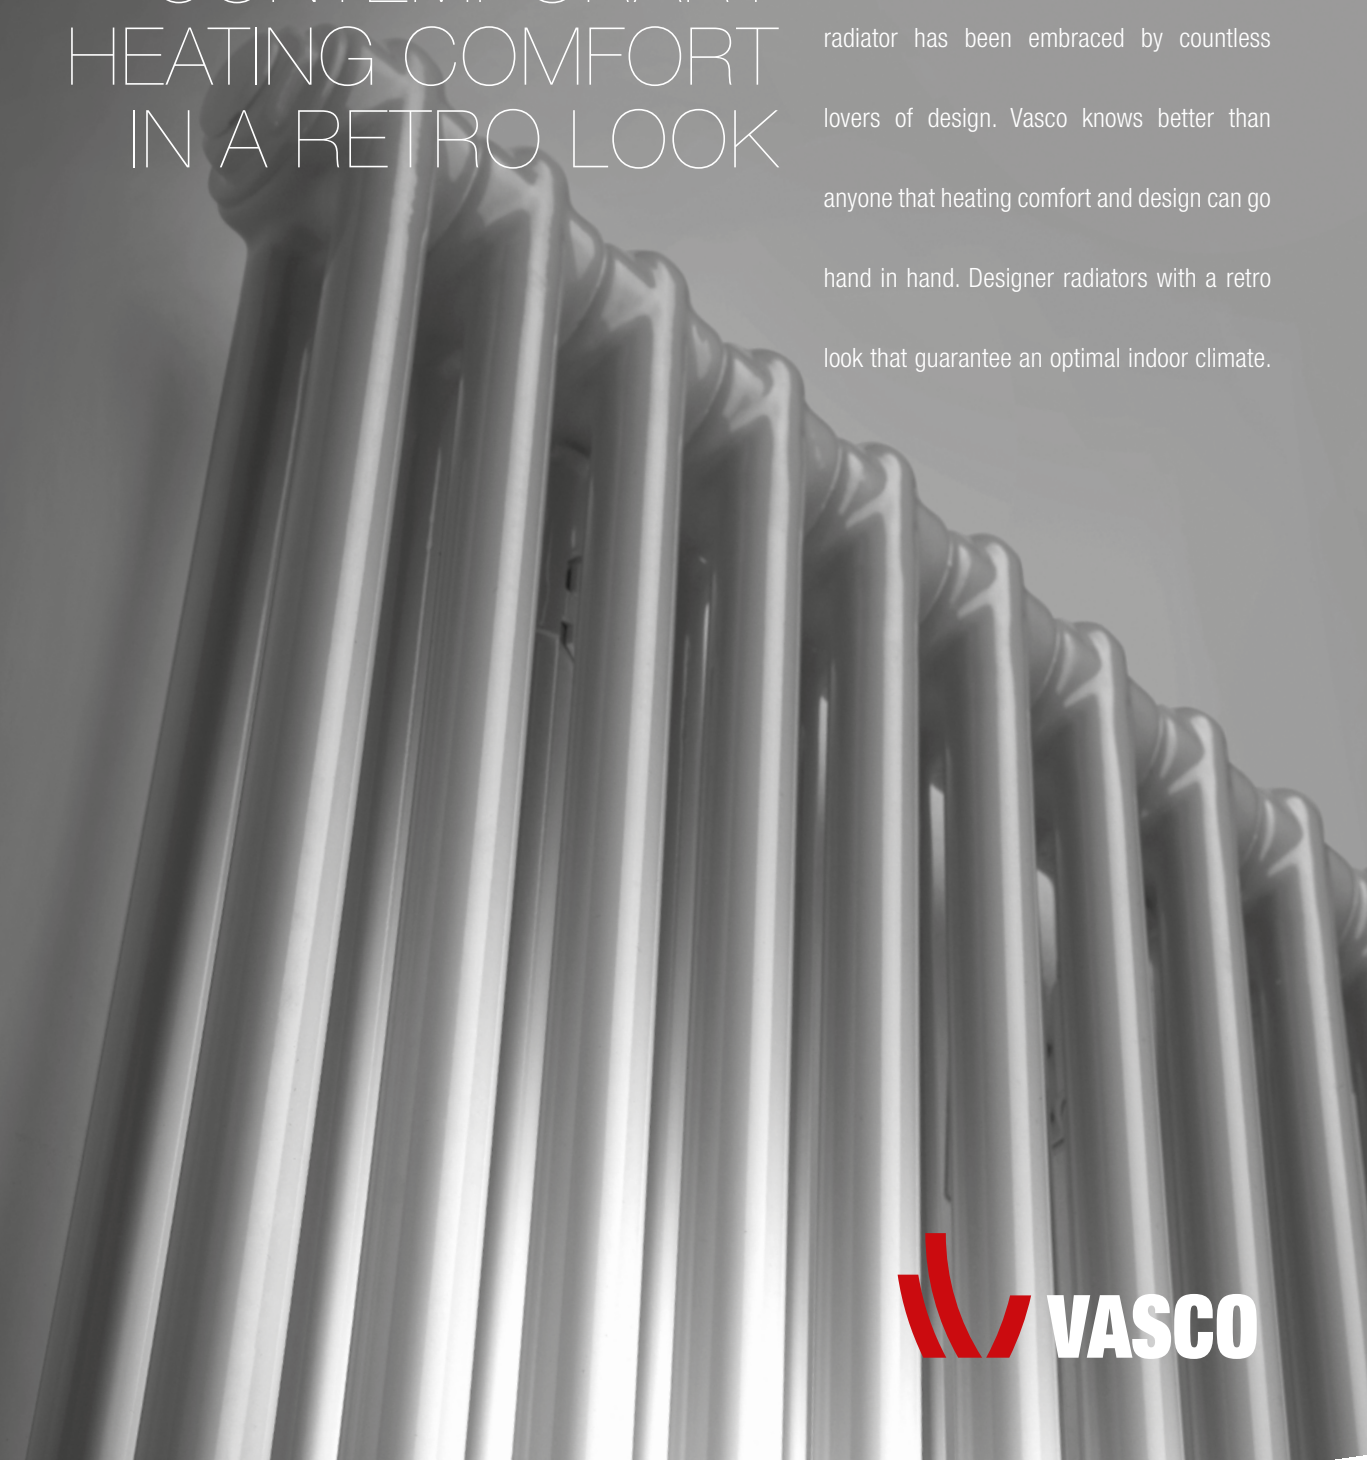

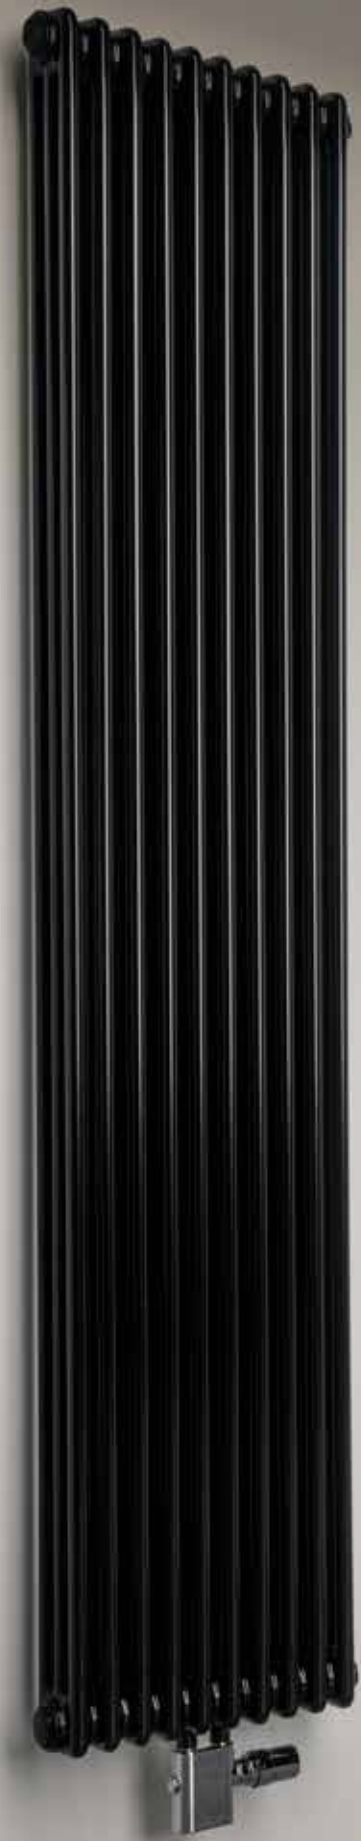

Ritmo vertical black RAL 9005



RITMO VERTICAL

FOR CLASSIC
TOWN
HOUSES
TO MODERN
LOFTS

The tall vertical column radiators are ideal for rooms with a large, open interior. From classic town houses to modern lofts with an industrial

vibe: the tall column radiator's retro look makes it a genuine eyecatcher. The Vasco column radiator

also delivers top performances in combination

with low water temperature systems such as heat

pumps. A retro radiator in the most sustainable

sense of the term. The Vasco column radiator,

right down to its finest details, is designed to

promote economical and sustainable energy consumption.

With smart connections and fastening

systems and innovative technological solutions.



RITMO V-2K/65 (2-COLUMN)



RITMO V-3K/105 (3-COLUMN)



RITMO V-4K/145 (4-COLUMN)





TYPES

- 2 / 3 / 4 columns
- Building depth: 65 / 105 / 145 mm
- Building height: from 1500 to 2200 mm
- Building length: from 270 to 720 mm

TUBES

- Vertical, 25 mm

COLOURS

- Standard colour white RAL 9016
- Colour black RAL 9005: + 15 %

BRACKETS

- Wall mounting
- Wall brackets to be ordered **separately**

TECHNICAL

- Composed of head pieces (strip steel pressed parts) and round tubes
- KTL primer coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

CONNECTION

- Two-point connection for one-pipe system (connection via the central connection)
- Two-point connection for two-pipe system (standard)

RITMO-V VERTICAL



2-COLUMN

RITMO VERTICAL
V-2K/65

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	n-exp.
-------	-----------------	------------------	------------------------------	--------

RITMO VERTICAL (V-2K/65) REF. NR.: 11353

6	270	1500	654	1,32
6	270	1800	780	1,32
6	270	2000	864	1,32
6	270	2200	948	1,32
8	360	1500	872	1,32
8	360	1800	1040	1,32
8	360	2000	1152	1,32
8	360	2200	1264	1,32
10	450	1500	1090	1,32
10	450	1800	1300	1,32
10	450	2000	1440	1,32
10	450	2200	1580	1,32
12	540	1500	1308	1,32
12	540	1800	1560	1,32
12	540	2000	1728	1,32
12	540	2200	1896	1,32
14	630	1500	1526	1,32
14	630	1800	1820	1,32
14	630	2000	2016	1,32
14	630	2200	2212	1,32
16	720	1500	1744	1,32
16	720	1800	2080	1,32
16	720	2000	2304	1,32
16	720	2200	2528	1,32



3-COLUMN

RITMO VERTICAL
V-3K/105

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	n-exp.
-------	-----------------	------------------	------------------------------	--------

RITMO VERTICAL (V-3K/105) REF. NR.: 11354

6	270	1500	882	1,35
6	270	1800	1038	1,35
6	270	2000	1140	1,34
6	270	2200	1242	1,34
8	360	1500	1176	1,35
8	360	1800	1384	1,35
8	360	2000	1520	1,34
8	360	2200	1656	1,34
10	450	1500	1470	1,35
10	450	1800	1730	1,35
10	450	2000	1900	1,34
10	450	2200	2070	1,34
12	540	1500	1764	1,35
12	540	1800	2076	1,35
12	540	2000	2280	1,34
12	540	2200	2484	1,34
14	630	1500	2058	1,35
14	630	1800	2422	1,35
14	630	2000	2660	1,34
14	630	2200	2898	1,34
16	720	1500	2352	1,35
16	720	1800	2768	1,35
16	720	2000	3040	1,34
16	720	2200	3312	1,34



4-COLUMN

RITMO VERTICAL
V-4K/145

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	n-exp.
-------	-----------------	------------------	------------------------------	--------

RITMO VERTICAL (V-4K/145) REF. NR.: 11355

6	270	1500	1116	1,35
6	270	1800	1314	1,34
6	270	2000	1446	1,34
6	270	2200	1572	1,34
8	360	1500	1488	1,35
8	360	1800	1752	1,34
8	360	2000	1928	1,34
8	360	2200	2096	1,34
10	450	1500	1860	1,35
10	450	1800	2190	1,34
10	450	2000	2410	1,34
10	450	2200	2620	1,34
12	540	1500	2232	1,35
12	540	1800	2628	1,34
12	540	2000	2892	1,34
12	540	2200	3144	1,34
14	630	1500	2604	1,35
14	630	1800	3066	1,34
14	630	2000	3374	1,34
14	630	2200	3668	1,34
16	720	1500	2976	1,35
16	720	1800	3504	1,34
16	720	2000	3856	1,34
16	720	2200	4192	1,34

In conformity with EN442-1: 2014: radiators and convectors

ACCESSORIES RITMO-V VERTICAL


COVER PLATE CENTRAL CONNECTION
IN WHITE OR CHROMETHERMOSTATIC HEAD
IN WHITE OR CHROME

TOWEL RAIL CHROME



CONNECTION

Air vent in connection 3 or 6

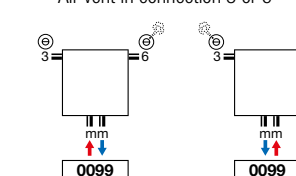For extended article numbers, technical drawings, prices and how to order, see technical price list or consult www.vasco.eu

EXTRA FAST WARMING

The horizontal, low Ritmo radiators are ideal for smaller spaces, like the bathroom or a hallway.

Whatever room you need a radiator for, you are sure to find a suitable model in the Vasco Ritmo line.




RITMO H-2K/65 (2-COLUMN)



RITMO H-3K/105 (3-COLUMN)



RITMO H-4K/145 (4-COLUMN)

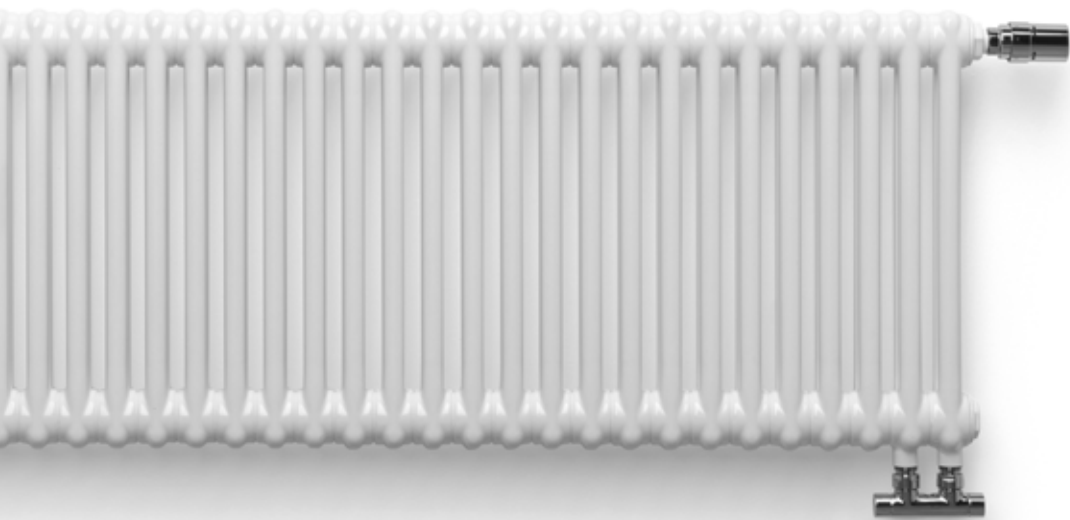

Ritmo horizontal white RAL 9016

RITMO HORIZONTAL



TYPES

- 2 / 3 / 4 columns
- Building depth: 65 / 105 / 145 mm
- Building height: from 300 to 900 mm
- Building length: from 450 to 1800 mm

TUBES

- Vertical, 25 mm

COLOURS

- Standard colour white RAL 9016
- Colour black RAL 9005: + 15 %

BRACKETS

- Floor or wall mounting
- Brackets to be ordered separately

TECHNICAL

- Composed of head pieces (strip steel pressed parts) and round tubes
- KTL primer coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

CONNECTION

- Two-point connection for one-pipe system (connection via the integrated valve)
- Two-point connection for two-pipe system (standard)
- Integrated valve (radiator to be ordered specially)

RITMO-H HORIZONTAL

2-COLUMN
RITMO HORIZONTAL
H-2K/65

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	n-exp.
-------	--------------	---------------	------------------------	--------

RITMO HORIZONTAL (H-2K/65) REF. NR.: 11350

10	450	300	240	1,26
10	450	400	310	1,31
10	450	500	390	1,31
10	450	600	460	1,31
10	450	900	670	1,31
12	540	300	288	1,26
12	540	400	372	1,31
12	540	500	468	1,31
12	540	600	552	1,31
12	540	900	804	1,31
14	630	300	336	1,26
14	630	400	434	1,31
14	630	500	546	1,31
14	630	600	644	1,31
14	630	900	938	1,31
16	720	300	384	1,26
16	720	400	496	1,31
16	720	500	624	1,31
16	720	600	736	1,31
16	720	900	1072	1,31
18	810	300	432	1,26
18	810	400	558	1,31
18	810	500	702	1,31
18	810	600	828	1,31
18	810	900	1206	1,31
20	900	300	480	1,26
20	900	400	620	1,31
20	900	500	780	1,31
20	900	600	920	1,31
20	900	900	1340	1,31
22	990	300	528	1,26
22	990	400	682	1,31
22	990	500	858	1,31
22	990	600	1012	1,31
22	990	900	1474	1,31
24	1080	300	576	1,26
24	1080	400	744	1,31
24	1080	500	936	1,31
24	1080	600	1104	1,31
24	1080	900	1608	1,31

3-COLUMN
RITMO HORIZONTAL
H-3K/105

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	n-exp.
-------	--------------	---------------	------------------------	--------

RITMO HORIZONTAL (H-3K/105) REF. NR.: 11351

10	450	300	330	1,33
10	450	400	430	1,36
10	450	500	530	1,36
10	450	600	630	1,36
10	450	900	920	1,36
12	540	300	396	1,33
12	540	400	516	1,36
12	540	500	636	1,36
12	540	600	756	1,36
12	540	900	1104	1,36
14	630	300	462	1,33
14	630	400	602	1,36
14	630	500	742	1,36
14	630	600	882	1,36
14	630	900	1288	1,36
16	720	300	528	1,33
16	720	400	688	1,36
16	720	500	848	1,36
16	720	600	1008	1,36
16	720	900	1472	1,36
18	810	300	594	1,33
18	810	400	774	1,36
18	810	500	954	1,36
18	810	600	1134	1,36
18	810	900	1656	1,36
20	900	300	660	1,33
20	900	400	860	1,36
20	900	500	1060	1,36
20	900	600	1260	1,36
20	900	900	1840	1,36
22	990	300	726	1,33
22	990	400	946	1,36
22	990	500	1166	1,36
22	990	600	1386	1,36
22	990	900	2024	1,36
24	1080	300	792	1,33
24	1080	400	1032	1,36
24	1080	500	1272	1,36
24	1080	600	1512	1,36
24	1080	900	2208	1,36

4-COLUMN
RITMO HORIZONTAL
H-4K/145

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	n-exp.
-------	--------------	---------------	------------------------	--------

RITMO HORIZONTAL (H-4K/145) REF. NR.: 11352

10	450	300	430	1,33
10	450	400	560	1,35
10	450	500	690	1,35
10	450	600	810	1,35
10	450	900	1170	1,35
12	540	300	516	1,33
12	540	400	672	1,35
12	540	500	828	1,35
12	540	600	972	1,35
12	540	900	1404	1,35
14	630	300	602	1,33
14	630	400	784	1,35
14	630	500	966	1,35
14	630	600	1134	1,35
14	630	900	1638	1,35
16	720	300	688	1,33
16	720	400	896	1,35
16	720	500	1104	1,35
16	720	600	1296	1,35
16	720	900	1872	1,35
18	810	300	774	1,33
18	810	400	1008	1,35
18	810	500	1242	1,35
18	810	600	1458	1,35
18	810	900	2106	1,35
20	900	300	860	1,33
20	900	400	1120	1,35
20	900	500	1380	1,35
20	900	600	1620	1,35
20	900	900	2340	1,35
22	990	300	946	1,33
22	990	400	1232	1,35
22	990	500	1518	1,35
22	990	600	1782	1,35
22	990	900	2574	1,35
24	1080	300	1032	1,33
24	1080	400	1344	1,35
24	1080	500	1656	1,35
24	1080	600	1944	1,35
24	1080	900	2808	1,35

tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	n-exp.
-------	--------------	---------------	------------------------	--------

RITMO HORIZONTAL (H-4K/145) REF. NR.: 11352

26	1170	300	1118	1,33
26	1170	400	1456	1,35
26	1170	500	1794	1,35
26	1170	600	2106	1,35
26	1170	900	3042	1,35
28	1260	300	1204	1,33
28	1260	400	1568	1,35
28	1260	500	1932	1,35
28	1260	600	2268	1,35
28	1260	900	3276	1,35
30	1350	300	1290	1,33
30	1350	400	1680	1,35
30	1350	500	2070	1,35
30	1350	600	2430	1,35
30	1350	900	3510	1,35
32	1440	300	1376	1,33
32	1440	400	1792	1,35
32	1440	500	2208	1,35
32	1440	600	2592	1,35
32	1440	900	3744	1,35
34	1530	300	1462	1,33
34	1530	400	1904	1,35
34	1530	500	2346	1,35
34	1530	600	2754	1,35
34	1530	900	3978	1,35
36	1620	300	1548	1,33
36	1620	400	2016	1,35
36	1620	500	2484	1,35
36	1620	600	2916	1,35
36	1620	900	4212	1,35
38	1710	300	1634	1,33
38	1710	400	2128	1,35
38	1710	500	2622	1,35
38	1710	600	3078	1,35
38	1710	900	4446	1,35
40	1800	300	1720	1,33
40	1800	400	2240	1,35
40	1800	500	2760	1,35
40	1800	600	3240	1,35
40	1800	900	4680	1,35

In conformity with EN442-1: 2014: radiators and convectors

In conformity with EN442-1: 2014: radiators and convectors



For extended article numbers, technical drawings, prices and how to order, see technical price list or consult www.vasco.eu

ACCESSORIES RITMO-H HORIZONTAL

VALVE CHROME




THERMOSTATIC HEAD
IN WHITE OR CHROME



TOWEL RAIL CHROME



CONNECTION

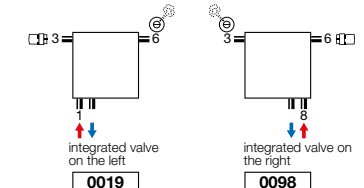



A BRAND OF VASCO GROUP

Vasco Group nv
Kruishoefstraat 50
B-3650 Dilsen
T. +32 (0)89 79 04 11
info@vasco.eu
www.vasco.eu