

# Bathroom radiators



For years VASCO has paid particular attention to **heating of 'the intimate space'**, with radiators that tangibly and visibly contribute to a pleasant atmosphere. From practical ladder models in all designs and sizes to slim space saving designer radiators that make you feel warm just by looking at them.

**VASCO bathroom radiators increase the feeling of wellness in the bathroom with smart targeted solutions and accessories.** Even the smallest details are dedicated to optimal comfort and a beautiful timeless look. Connection and fastening systems are well thought out and efficiently integrated into the design. Drying and stacking shelves, towel rails and operating buttons also form a homogenous whole in the design.

#### Bathroom radiators

Oni	14
Iris-A	16
Agave-A	19
Aster-A	21
Bano	23
Carré Bathroom	27
Arche Bathroom	29
Zana Bathroom	31

## ONI (O-P, O-NP)



VASCO

### TYPES

- O-P: with one (1400 mm) or two (1800/2000 mm) cut-outs for hanging towels
- O-NP: without cut-outs

### COLOURS

- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

### SPECIAL

- A copper heating tube is integrated into the ultra-thin aluminium front plate.

### BRACKETS

- Wall brackets standard

### TECHNICAL

- The pathway for the heating tube is milled out to 2 mm below the surface. The tube is then pressed into the aluminium plate.
- KTL priming coat, powder coating
- Standard operating pressure: 6 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 37

### CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)

## ONI


### Simplicity and efficiency combined in the absolute essence, free of any superfluity

The timeless Oni combines clean and sober design with unsurpassed user-friendliness. With its gently rounded corners and slender heating surface, it elicits admiration in every interior. The Oni is available in virtually all VASCO colours and thus easily matches every setting.

### RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 327

### RECOMMENDED FOR BATHROOM AND KITCHEN (O-NP) IN OPTION



towel rail MULTI+ right (S600)  
ref. nr. see p. 34  
price €204



towel rail MULTI+ right (RAL 9005)  
ref. nr. see p. 34  
price €204

Other accessories, see p. 34



**HOW TO ORDER ONI**

Delivery time 15 - 30 working days  
(transport duration not included)

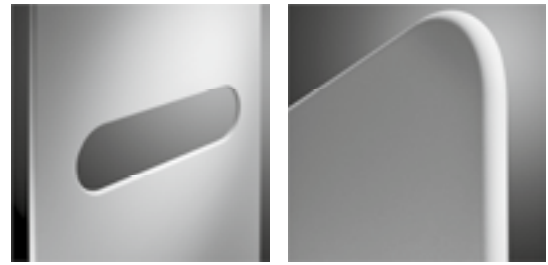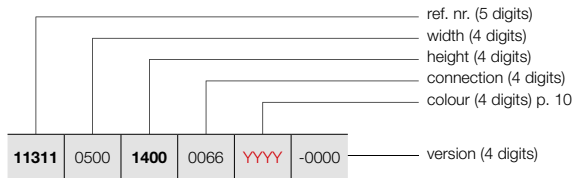


O-P

O-NP

**HOW TO ORDER STOCK RADIATOR ONI**

Delivery time 5 working days  
(transport duration not included)



**PRICE GROUP: VPG1 - BATHROOM RADIATORS**


REFERENCE CODE CUSTOM MADE ONI	TECHNICAL DATA										STANDARD COLOUR		OTHER COLOURS				
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price S600* (€)	short ref. nr. S600 stock	price colour (€)					
<b>REF. NR. ONI O-P : 11311</b>																	
<b>11311</b>	0500	<b>1400</b>	0066	YYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-	<b>1203</b>	<b>11311-01</b>	<b>1383</b>
		<b>1800</b>				-	500	1800	795	420	1,25	20,85	0,45	-	<b>1360</b>	<b>11311-02</b>	<b>1564</b>
		<b>2000</b>				-	500	2000	815	430	1,25	22,95	0,60	-	<b>1436</b>	<b>11311-03</b>	<b>1651</b>
<b>REF. NR. ONI O-NP : 11312</b>																	
<b>11312</b>	0500	<b>1400</b>	0066	YYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-	<b>1112</b>	<b>11312-01</b>	<b>1279</b>
		<b>1800</b>				-	500	1800	795	420	1,25	20,85	0,45	-	<b>1267</b>	<b>11312-02</b>	<b>1457</b>
		<b>2000</b>				-	500	2000	815	430	1,25	22,95	0,60	-	<b>1344</b>	<b>11312-03</b>	<b>1546</b>

In conformity with EN442-1: 2014: radiators and convectors

\* RAL 9016: no extra charge 15%

**For heat outputs in other regimes, see p. 320 (correction factors)**

**EXPORT. Prices in Euro (excl. VAT)**

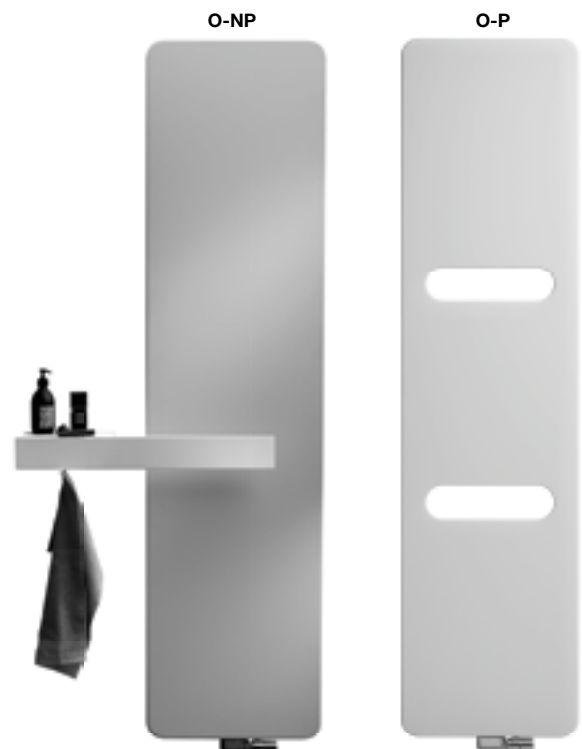

## IRIS-A (HDM-A, HDRM-A)



### TYPES

- Straight (HDM-A) and curved (HDRM-A)

### TUBES

- Horizontal, round Ø 20 mm

### COLLECTORS

- Vertical, D-profile 40 x 32 mm

### COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

### SPECIAL

- The horizontal tubes of type HDRM-A are slightly bent (10°).

### BRACKETS

- Wall brackets in the colour of the radiator standard (included in packaging of radiator)
- Mounting set available for HDM-A free-standing installation (see p. 33), not suitable for connection 45 and 54

### TECHNICAL

- Soldered (invisible soldered seams)
- ATL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 38

### CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection from above, a special flow tube is pre-assembled in the right-hand collector pipe - for return on the right.
- For return on the left, the flow tube must be manually changed to the left side.
- Connection from above must be ordered as a separate radiator.




### IRIS-A

#### Design, power and sustainability in one compact model

The basic model for bathroom radiators for many years. The seamless connection between the vertical D profile and horizontal tubes ensures a homogenous structure wherein everything is correct. The Iris-A also guarantees a trouble-free assembly thanks to the smart centre connection. A radiator that is perfectly finished with a superior comfort for many years.

### CONNECTION (1188)



Other connection methods, see p. 36



ref. nr. 1182 103 0000 9016

price €195

Fittings, see p. 327

### INCLUDED FREE OF CHARGE




standard, folding chrome plated drying and stacking rack



HDM-A

## HOW TO ORDER IRIS-A

Delivery time 15 - 30 working days  
(transport duration not included)

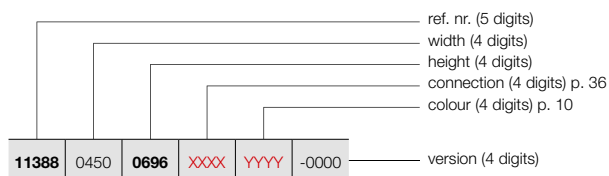


### FREE-STANDING INSTALLATION (HDM-A)

See p. 33 for additional accessories.

### HOW TO ORDER STOCK RADIATOR IRIS-A

Delivery time 5 working days  
(transport duration not included)



## IRIS-A (HDM-A)



HDM-A

### PRICE GROUP VPG1 - BATHROOM RADIATORS


REFERENCE CODE CUSTOM MADE IRIS-A	TECHNICAL DATA									STANDARD COLOUR		OTHER COLOURS price colour (€)					
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock						
<b>REF. NR. IRIS-A HDM-A : 11388</b>																	
<b>11388</b>	0450	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	18	450	696	335	177	1,23	5,14	3,14	300	<b>435</b>	-	<b>500</b>
		<b>1104</b>				28	450	1104	511	268	1,25	7,84	4,87	500	<b>544</b>	<b>11388-01</b>	<b>626</b>
		<b>1308</b>				34	450	1308	600	314	1,25	9,40	5,90	500	<b>658</b>	<b>11388-02</b>	<b>757</b>
		<b>1682</b>				43	450	1682	764	400	1,25	11,82	7,55	750	<b>724</b>	<b>11388-03</b>	<b>833</b>
<b>11388</b>	0500	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	18	500	696	369	195	1,23	5,52	3,38	300	<b>446</b>	<b>11388-04</b>	<b>513</b>
		<b>1104</b>				28	500	1104	563	296	1,25	8,40	5,24	500	<b>564</b>	<b>11388-05</b>	<b>649</b>
		<b>1308</b>				34	500	1308	661	346	1,25	10,11	6,36	750	<b>676</b>	<b>11388-06</b>	<b>777</b>
		<b>1682</b>				43	500	1682	842	440	1,25	12,72	8,13	750	<b>747</b>	<b>11388-07</b>	<b>859</b>
<b>11388</b>	0600	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	18	600	696	436	230	1,23	6,27	3,85	500	<b>467</b>	<b>11388-08</b>	<b>537</b>
		<b>1104</b>				28	600	1104	666	349	1,25	9,52	5,99	750	<b>596</b>	<b>11388-09</b>	<b>685</b>
		<b>1308</b>				34	600	1308	782	409	1,26	11,52	7,29	750	<b>711</b>	<b>11388-10</b>	<b>818</b>
		<b>1682</b>				43	600	1682	996	521	1,25	14,51	9,29	1000	<b>788</b>	<b>11388-11</b>	<b>906</b>
		<b>1954</b>				51	600	1954	1154	606	1,25	17,25	10,90	1250	<b>899</b>	<b>11388-12</b>	<b>1034</b>
<b>11388</b>	0750	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	18	750	696	535	282	1,24	7,41	4,57	500	<b>499</b>	-	<b>574</b>
		<b>1104</b>				28	750	1104	818	429	1,25	11,20	7,08	750	<b>636</b>	-	<b>731</b>
		<b>1308</b>				34	750	1308	960	501	1,26	13,64	8,67	1000	<b>764</b>	<b>11388-13</b>	<b>879</b>
		<b>1682</b>				43	750	1682	1222	639	1,26	17,19	11,02	1250	<b>856</b>	<b>11388-14</b>	<b>984</b>
		<b>1954</b>				51	750	1954	1417	743	1,25	20,35	12,90	1500	<b>976</b>	<b>11388-15</b>	<b>1122</b>
<b>11388</b>	0900	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	18	900	696	633	334	1,24	8,54	5,28	500	<b>534</b>	-	<b>614</b>
		<b>1104</b>				28	900	1104	967	506	1,25	13,20	8,20	1000	<b>680</b>	-	<b>782</b>
		<b>1308</b>				34	900	1308	1135	592	1,26	15,76	10,06	1250	<b>816</b>	-	<b>938</b>
		<b>1682</b>				43	900	1682	1445	755	1,26	19,88	12,76	1500	<b>923</b>	<b>11388-16</b>	<b>1061</b>
		<b>1954</b>				51	900	1954	1675	878	1,25	23,44	14,90	1500	<b>1053</b>	<b>11388-17</b>	<b>1211</b>

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
EXPORT. Prices in Euro (excl. VAT)




# IRIS-A (HDRM-A)



HDRM-A


## HOW TO ORDER IRIS-A

Delivery time 15 - 30 working days  
(transport duration not included)

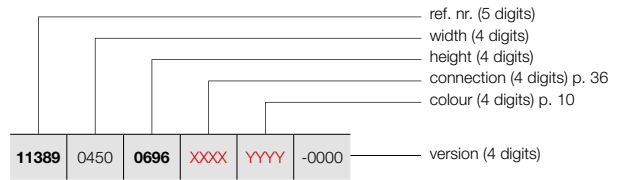

## HOW TO ORDER STOCK RADIATOR IRIS-A

Delivery time 5 working days  
(transport duration not included)



### PRICE GROUP VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE IRIS-A	TECHNICAL DATA									STANDARD COLOUR		OTHER COLOURS price colour (€)					
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock						
<b>REF. NR. IRIS-A HDRM-A : 11389</b>																	
<b>11389</b>	0450	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	18	450	696	335	177	1,23	5,14	3,14	300	<b>475</b>	-	<b>546</b>
		<b>1104</b>				28	450	1104	511	268	1,25	7,84	4,87	500	<b>602</b>	-	<b>692</b>
		<b>1308</b>				34	450	1308	600	314	1,25	9,40	5,90	500	<b>720</b>	-	<b>828</b>
		<b>1682</b>				43	450	1682	764	400	1,25	11,82	7,55	750	<b>794</b>	-	<b>913</b>
<b>11389</b>	0500	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	18	500	696	369	195	1,23	5,52	3,38	300	<b>490</b>	-	<b>564</b>
		<b>1104</b>				28	500	1104	563	296	1,25	8,40	5,24	500	<b>619</b>	-	<b>712</b>
		<b>1308</b>				34	500	1308	661	346	1,25	10,11	6,36	750	<b>745</b>	-	<b>857</b>
		<b>1682</b>				43	500	1682	842	440	1,25	12,72	8,13	750	<b>822</b>	-	<b>945</b>
<b>11389</b>	0600	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	18	600	696	436	230	1,23	6,27	3,85	500	<b>514</b>	-	<b>591</b>
		<b>1104</b>				28	600	1104	666	349	1,25	9,52	5,99	750	<b>656</b>	-	<b>754</b>
		<b>1308</b>				34	600	1308	782	409	1,26	11,52	7,29	750	<b>784</b>	-	<b>902</b>
		<b>1682</b>				43	600	1682	996	521	1,25	14,51	9,29	1000	<b>866</b>	<b>11389-01</b>	<b>996</b>
		<b>1954</b>				51	600	1954	1154	606	1,25	17,25	10,90	1250	<b>989</b>	-	<b>1137</b>
<b>11389</b>	0750	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	18	750	696	535	282	1,24	7,41	4,57	500	<b>550</b>	-	<b>633</b>
		<b>1104</b>				28	750	1104	818	429	1,25	11,20	7,08	750	<b>701</b>	-	<b>806</b>
		<b>1308</b>				34	750	1308	960	501	1,26	13,64	8,67	1000	<b>839</b>	-	<b>965</b>
		<b>1682</b>				43	750	1682	1222	639	1,26	17,19	11,02	1250	<b>940</b>	-	<b>1081</b>
		<b>1954</b>				51	750	1954	1417	743	1,25	20,35	12,90	1500	<b>1074</b>	-	<b>1235</b>
<b>11389</b>	0900	<b>0696</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	18	900	696	633	334	1,24	8,54	5,28	500	<b>586</b>	-	<b>674</b>
		<b>1104</b>				28	900	1104	967	506	1,25	13,20	8,20	1000	<b>750</b>	-	<b>863</b>
		<b>1308</b>				34	900	1308	1135	592	1,26	15,76	10,06	1250	<b>897</b>	-	<b>1032</b>
		<b>1682</b>				43	900	1682	1445	755	1,26	19,88	12,76	1500	<b>1015</b>	-	<b>1167</b>
		<b>1954</b>				51	900	1954	1675	878	1,25	23,44	14,90	1500	<b>1157</b>	-	<b>1331</b>

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
EXPORT. Prices in Euro (excl. VAT)



**TYPES**

- Straight (HRM-A)

**TUBES**

- Horizontal, round Ø 20 mm

**COLLECTORS**

- Vertical, rear, round Ø 28 mm

**COLOURS**

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

**BRACKETS**

- Wall brackets in the colour of the radiator standard (included in packaging of radiator)

**TECHNICAL**

- Welded by means of resistance welding (invisible weld seams)
- ATL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**

- See p. 38


**CONNECTION**

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection from above, a special flow tube is pre-assembled in the right-hand collector pipe - for return on the right.
- For return on the left, the flow tube must be manually changed to the left side.
- Connection from above must be ordered as a separate radiator.



VASCO

**CONNECTION (1188)**



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099

price €218

Fittings, see p. 327

**INCLUDED FREE OF CHARGE**



standard, folding chrome plated drying and stacking rack

**AGAVE-A**


**Sleek, sophisticated and graceful heat**

Exceptionally slender tubes, combined to an elegant structure that continues to fascinate and charm because of its soft, rounded shapes. Accentuated by the horizontal tubes that lie above the vertical collectors. If bathroom comfort is synonymous with intimacy, then intimacy is synonymous with Agave-A. An absolute eye catcher, that contributes to the comfortable atmosphere that you expect from a contemporary bathroom.






## AGAVE-A (HRM-A)



HRM-A


### HOW TO ORDER AGAVE-A

Delivery time 15 - 30 working days  
(transport duration not included)

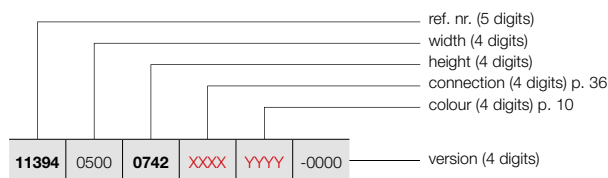

### HOW TO ORDER STOCK RADIATOR AGAVE-A

Delivery time 5 working days  
(transport duration not included)



### PRICE GROUP VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE AGAVE-A							TECHNICAL DATA					STANDARD COLOUR		OTHER COLOURS			
tubes	width (L mm)	height (H mm)	75/65/20 (Watt Φ50K)	55/45/20 (Watt Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)						
<b>REF. NR. AGAVE-A HRM-A : 11394</b>																	
<b>11394</b>	<b>0500</b>	<b>0742</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	20	500	742	434	235	1,19	7,40	3,10	500	<b>537</b>	-	<b>618</b>
		<b>1171</b>				29	500	1171	638	345	1,19	11,50	4,90	500	<b>657</b>	<b>11394-01</b>	<b>756</b>
		<b>1501</b>				37	500	1501	789	426	1,19	15,10	6,40	750	<b>873</b>	-	<b>1004</b>
		<b>1798</b>				44	500	1798	921	493	1,21	17,80	7,50	1000	<b>1034</b>	<b>11394-02</b>	<b>1189</b>
<b>11394</b>	<b>0600</b>	<b>0742</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	20	600	742	519	279	1,20	8,60	3,60	500	<b>566</b>	-	<b>651</b>
		<b>1171</b>				29	600	1171	763	411	1,20	13,30	5,60	750	<b>700</b>	<b>11394-03</b>	<b>805</b>
		<b>1501</b>				37	600	1501	943	508	1,20	17,50	7,40	1000	<b>932</b>	-	<b>1072</b>
		<b>1798</b>				44	600	1798	1102	591	1,21	20,60	8,70	1250	<b>1108</b>	<b>11394-04</b>	<b>1274</b>
<b>11394</b>	<b>0750</b>	<b>0742</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	20	750	742	646	344	1,22	10,30	4,30	500	<b>608</b>	-	<b>699</b>
		<b>1171</b>				29	750	1171	950	508	1,21	16,00	6,70	1000	<b>756</b>	-	<b>869</b>
		<b>1501</b>				37	750	1501	1175	630	1,21	21,00	8,90	1250	<b>1022</b>	-	<b>1175</b>
		<b>1798</b>				44	750	1798	1372	738	1,20	24,70	10,40	1250	<b>1191</b>	<b>11394-05</b>	<b>1370</b>
<b>11394</b>	<b>0900</b>	<b>0742</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	20	900	742	773	408	1,24	12,00	5,10	500	<b>618</b>	-	<b>711</b>
		<b>1171</b>				29	900	1171	1137	604	1,23	18,70	7,90	1250	<b>773</b>	-	<b>889</b>
		<b>1501</b>				37	900	1501	1405	749	1,22	24,60	10,30	1500	<b>1053</b>	-	<b>1211</b>
		<b>1798</b>				44	900	1798	1641	886	1,19	28,80	12,10	1500	<b>1228</b>	-	<b>1412</b>

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
EXPORT. Prices in Euro (excl. VAT)

**VASCO**

**TYPES**

- HF-A: 1 row of tubes

**TUBES**

- Horizontal, flat-oval 57,5 x 10 mm

**COLLECTORS**

- Vertical, rear, round Ø 28 mm

**COLOURS**

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

**BRACKETS**

- Wall brackets in the colour of the radiator standard (included in packaging of radiator)

**TECHNICAL**

- Welded by means of resistance welding (invisible weld seams)
- ATL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**

- See p. 39


**CONNECTION**

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: 1/2" (inner thread)
- For connection from above, a special flow tube is pre-assembled in the right-hand collector pipe - for return on the right.
- For return on the left, the flow tube must be manually changed to the left side.
- Connection from above must be ordered as a separate radiator.



VASCO

**CONNECTION (1188)**



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099

price €218

Fittings, see p. 327


ASTER-A

**Minimalism in service of a maximum comfort**

The Aster-A gives minimalism a new dimension with its sleek, contemporary look and its quick, controlled heat output which immerses you in an atmosphere of tranquillity and well-being in no time.




# ASTER-A (HF-A)



HF-A


## HOW TO ORDER ASTER-A

Delivery time 15 - 30 working days  
(transport duration not included)

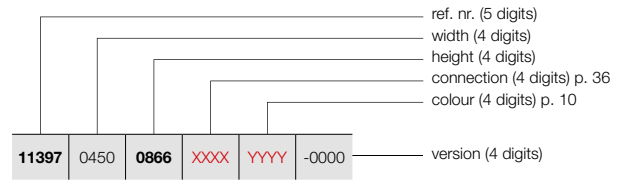

## HOW TO ORDER STOCK RADIATOR ASTER-A

Delivery time 5 working days  
(transport duration not included)



### PRICE GROUP VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE ASTER-A	TECHNICAL DATA									STANDARD COLOUR		OTHER COLOURS price colour (€)					
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (Φ50K)	55/45/20 (Watt) (Φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock						
<b>REF. NR. ASTER-A HF-A : 11397</b>																	
<b>11397</b>	0450	<b>0866</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	12	450	866	390	209	1,20	10,20	3,00	300	<b>579</b>	-	<b>666</b>
		<b>1169</b>				16	450	1169	513	274	1,22	13,40	4,00	500	<b>702</b>	-	<b>807</b>
		<b>1471</b>				21	450	1471	634	336	1,23	17,60	5,30	500	<b>785</b>	<b>11397-01</b>	<b>903</b>
		<b>1834</b>				27	450	1834	780	410	1,24	21,80	6,50	750	<b>865</b>	<b>11397-02</b>	<b>995</b>
<b>11397</b>	0600	<b>1169</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	16	600	1169	667	357	1,21	17,00	4,90	500	<b>765</b>	<b>11397-03</b>	<b>880</b>
		<b>1471</b>				21	600	1471	825	441	1,21	22,30	6,40	750	<b>881</b>	<b>11397-04</b>	<b>1013</b>
		<b>1834</b>				27	600	1834	1014	541	1,21	27,70	8,00	1000	<b>994</b>	<b>11397-05</b>	<b>1143</b>
<b>11397</b>	0700	<b>1834</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	27	700	1834	1167	629	1,20	31,70	9,00	1250	<b>1080</b>	-	<b>1242</b>
<b>11397</b>	0800	<b>1834</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	27	800	1834	1318	717	1,18	35,60	10,00	1250	<b>1156</b>	-	<b>1329</b>
		<b>2137</b>				31	800	2137	1523	832	1,17	41,00	11,40	1500	<b>1356</b>	-	<b>1559</b>

In conformity with EN442-1: 2014: radiators and convectors

**For heat outputs in other regimes, see p. 320 (correction factors)**  
**EXPORT. Prices in Euro (excl. VAT)**

**TYPES**

- Straight (BM) and curved (BMR)

**TUBES**

- Horizontal, round Ø 22 mm

**COLLECTORS**

- Vertical, D-profile 34 x 34 mm

**COLOURS**

- Standard colour white RAL 9016
- Not available in other colours

**SPECIAL**

- The horizontal tubes of type BMR are slightly bent (10°).

**BRACKETS**

- Wall brackets standard

**TECHNICAL**

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**


- See p. 39

**CONNECTION**

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system (connection by way of the central connection)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)



**RECOMMENDED CONNECTION (0018)**



ref. nr. 1182 101 0000 0099  
**price € 218**  
 Fittings, see p. 327

Other connection methods, see p. 0



**BANO**

**Stylish enjoyment in the warmest room**

Are you looking for inspiring radiators for your new construction or renovation, which will make your home stand out without running over your building budget? Bano is the solution.

# BANO (BM, BMR)




BM



BMR


## HOW TO ORDER BANO

Delivery time 15 - 30 working days  
(transport duration not included)

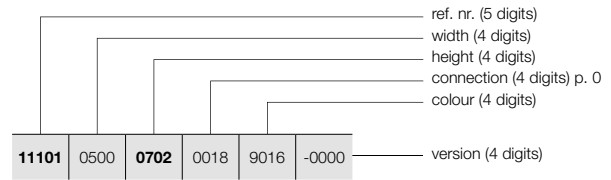

## HOW TO ORDER STOCK RADIATOR BANO

Delivery time 5 working days  
(transport duration not included)



PRICE GROUP: VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE BANO	TECHNICAL DATA									STANDARD COLOUR
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock
<b>REF. NR. BANO BM : 11101</b>										
11101   0500   0702   0018   9016   -0000	15	500	702	347	185	1,22	4,90	3,43	300	11101-13
	25	500	1186	574	311	1,20	7,80	5,27	500	11101-04
	35	500	1714	823	439	1,23	11,10	7,51	750	11101-07
11101   0600   0702   0018   9016   -0000	15	600	702	409	218	1,22	5,50	3,89	300	-
	25	600	1186	676	366	1,20	8,90	6,03	750	11101-08
	35	600	1714	970	520	1,22	12,60	8,59	1000	11101-09
<b>REF. NR. BANO BMR : 11104</b>										
11104   0500   0702   0018   9016   -0000	15	500	702	347	185	1,22	6,45	3,43	300	-
	25	500	1186	574	311	1,20	10,72	5,27	500	-
	35	500	1714	823	439	1,23	15,33	7,51	750	-
11104   0600   0702   0018   9016   -0000	15	600	702	409	218	1,22	7,30	3,89	300	-
	25	600	1186	676	366	1,20	12,10	6,03	750	-
	35	600	1714	970	520	1,22	17,24	8,59	1000	11104-09

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
Prices on demand

## BANO WITH CENTRAL CONNECTION (BMmm, BMRmm)

### TYPES

- Straight (BMmm) and curved (BMRmm)
- With central connection

### TUBES

- Horizontal, round Ø 22 mm

### COLLECTORS

- Vertical, D-profile 34 x 34 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in other colours

### SPECIAL

- The horizontal tubes of type BMRmm are slightly bent (10°).

### BRACKETS

- Wall brackets standard

### TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 40


### CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)



VASCO

### RECOMMENDED CONNECTION (1008)



Other connection methods, see p. 0



ref. nr. 1182001 00009016  
price € 129  
Fittings, see p. 327



ref. nr. 11911630102  
price € 44

### BANO WITH CENTRAL CONNECTION

#### Powerful eyecatcher

Bano offers the perfect solution for every room in the house, from bathroom to kitchen. Not standard heating elements, but stylish interior objects.



# BANO WITH CENTRAL CONNECTION (BMmm, BMRmm)




BMmm



BMRmm


## HOW TO ORDER BANO WITH CENTRAL CONNECTION

Delivery time 15 - 30 working days  
(transport duration not included)

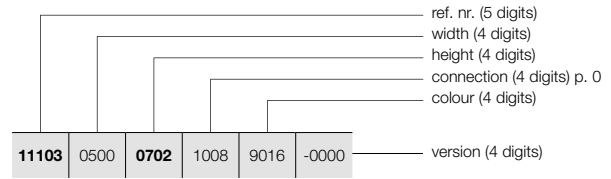

## HOW TO ORDER STOCK RADIATOR BANO WITH CENTRAL CONNECTION

Delivery time 5 working days  
(transport duration not included)



PRICE GROUP: VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE BANO WITH CENTRAL CONNECTION	TECHNICAL DATA										STANDARD COLOUR
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt) ( $\phi$ 50K)	55/45/20 (Watt) ( $\phi$ 30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock	
<b>REF. NR. BANO WITH CENTRAL CONNECTION BMmm : 11103</b>											
<b>11103</b>	0500	<b>0702</b>	1008	9016	-0000						
		<b>1186</b>									<b>11103-02</b>
		<b>1714</b>									<b>11103-03</b>
											<b>11103-05</b>
<b>11103</b>	0600	<b>0702</b>	1008	9016	-0000						
		<b>1186</b>									<b>11103-08</b>
		<b>1714</b>									<b>11103-04</b>
											<b>11103-06</b>
<b>REF. NR. BANO WITH CENTRAL CONNECTION BMRmm : 11105</b>											
<b>11105</b>	0500	<b>0702</b>	1008	9016	-0000						-
		<b>1186</b>									-
		<b>1714</b>									-
<b>11105</b>	0600	<b>0702</b>	1008	9016	-0000						-
		<b>1186</b>									-
		<b>1714</b>									<b>11105-07</b>

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
Prices on demand

**TUBES**

- Horizontal, square 25 x 25 mm

**COLLECTORS**

- Vertical, round Ø 35 mm

**COLOURS**

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

**BRACKETS**

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016 (see p. 33).

**TECHNICAL**

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**


- See p. 40

**CONNECTION**


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 315.



**RECOMMENDED CONNECTION (1188)**



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099

price € 218

Fittings, see p. 327

**RECOMMENDED FOR BATHROOM AND KITCHEN  
IN OPTION**



towel rail straight (chrome)

ref. nr. see p. 34

price € 187

Other accessories, see p. 34

**CARRÉ BATHROOM**

**A one piece bathroom radiator**

The Carré Bathroom, now also with centre connection, continues to charm us by its pure, architectural design and its striking simplicity. Everything about this bathroom radiator is unique and unsurpassed: the perfect uniformity, the surprisingly high heat output and superior technicality. Because behind the automatic design hides a lot of technological ingenuity that is passed down to the smallest details.






# CARRÉ BATHROOM (CB)



CB


## HOW TO ORDER CARRÉ BATHROOM

Delivery time 15 - 30 working days  
(transport duration not included)

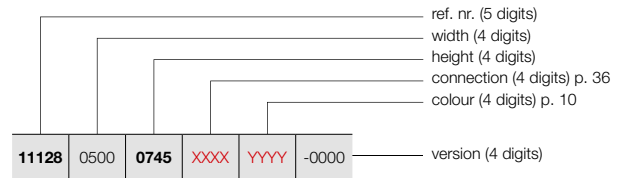

## HOW TO ORDER STOCK RADIATOR CARRÉ BATHROOM

Delivery time 5 working days  
(transport duration not included)



PRICE GROUP: VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE CARRÉ BATHROOM							TECHNICAL DATA					STANDARD COLOUR		OTHER COLOURS			
tubes	width (L mm)	height (H mm)	75/65/20 (Watt (φ50K))	55/45/20 (Watt (φ30K))	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)						
<b>REF. NR. CARRÉ BATHROOM CB : 11128</b>																	
<b>11128</b>	<b>0500</b>	<b>0745</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	21	500	745	438	235	1,22	12,80	6,20	500	<b>657</b>	-	<b>756</b>
		<b>1375</b>				40	500	1375	747	399	1,23	22,95	11,80	750	<b>998</b>	<b>11128-12</b>	<b>1148</b>
		<b>1735</b>				50	500	1735	925	493	1,23	29,00	14,80	1000	<b>1183</b>	-	<b>1360</b>
<b>11128</b>	<b>0600</b>	<b>0745</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	21	600	745	521	278	1,23	14,35	7,30	500	<b>690</b>	-	<b>794</b>
		<b>1375</b>				40	600	1375	886	473	1,23	27,35	13,90	1000	<b>1051</b>	-	<b>1209</b>
		<b>1735</b>				50	600	1735	1089	581	1,23	33,35	17,20	1250	<b>1241</b>	<b>11128-24</b>	<b>1427</b>

In conformity with EN442-1: 2014: radiators and convectors

**For heat outputs in other regimes, see p. 320 (correction factors)**  
**EXPORT. Prices in Euro (excl. VAT)**

**TUBES**

- AB: Horizontal, rectangular 45 x 20 mm

**COLOURS**

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

**SPECIAL**

- The Arche is awarded with the Design Plus Award 2005, Reddot Design Award 2006, Silver Award Designpreis Deutschland 2006 and nominated for the Henry van de Velde prize 2005.
- Radiator with spaces

**BRACKETS**

- Wall brackets standard (telescopic)

**TECHNICAL**

- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 110°C

**ELECTRICAL**

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

**TECHNICAL DRAWINGS**

- See p. 41


**CONNECTION**

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)




VASCO

**RECOMMENDED CONNECTION (1188)**



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099  
**price € 218**  
 Fittings, see p. 327

**RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION**



hook (chrome)  
 ref. nr. see p. 34  
**price € 87**  
**Other accessories, see p. 34**

**ARCHE BATHROOM**

**Square, the most beautiful and most practical**

A classic example of smart applied design, practical and easy to assemble thanks to the intelligent centre connection that connects the form and efficiency in a unique way. The sleek, soothing character enhances the wellness feeling. The customized heat release, the thoughtful accessories and the good relations with the low temperature system are all guarantees for a sustainable invention with a lasting return.




# ARCHE BATHROOM (AB)



AB


## HOW TO ORDER ARCHE BATHROOM

Delivery time 15 - 30 working days  
(transport duration not included)

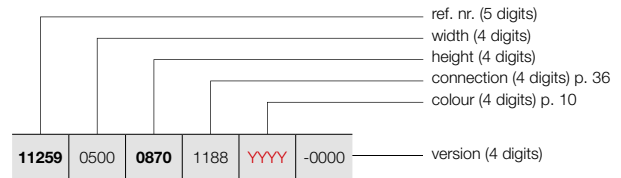

## HOW TO ORDER STOCK RADIATOR ARCHE BATHROOM

Delivery time 5 working days  
(transport duration not included)



PRICE GROUP: VPG1 - BATHROOM RADIATORS

REFERENCE CODE CUSTOM MADE ARCHE BATHROOM							TECHNICAL DATA						STANDARD COLOUR		OTHER COLOURS		
tubes	width (L mm)	height (H mm)	75/65/20 (Watt (φ50K)	55/45/20 (Watt (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	short ref. nr. RAL 9016 stock	price colour (€)						
<b>REF. NR. ARCHE BATHROOM AB : 11259</b>																	
<b>11259</b>	<b>0500</b>	<b>0870</b>	<b>1188</b>	<b>YYY</b>	<b>-0000</b>	16	500	870	502	264	1,26	12,20	6,55	-	<b>738</b>	-	<b>849</b>
		<b>1470</b>				28	500	1470	805	419	1,28	20,65	11,45	-	<b>1048</b>	<b>11259-04</b>	<b>1205</b>
		<b>1870</b>				36	500	1870	1022	531	1,28	25,65	14,15	-	<b>1216</b>	<b>11259-02</b>	<b>1398</b>
<b>11259</b>	<b>0600</b>	<b>0870</b>	<b>1188</b>	<b>YYY</b>	<b>-0000</b>	16	600	870	588	311	1,25	14,10	7,58	-	<b>768</b>	-	<b>883</b>
		<b>1470</b>				28	600	1470	942	487	1,29	24,03	13,35	-	<b>1094</b>	<b>11259-05</b>	<b>1258</b>
		<b>1870</b>				36	600	1870	1197	622	1,28	29,93	17,05	-	<b>1269</b>	<b>11259-03</b>	<b>1459</b>
<b>11259</b>	<b>0700</b>	<b>0870</b>	<b>1188</b>	<b>YYY</b>	<b>-0000</b>	16	700	870	672	357	1,24	16,00	8,60	-	<b>786</b>	-	<b>904</b>
		<b>1470</b>				28	700	1470	1077	557	1,29	27,40	15,25	-	<b>1118</b>	-	<b>1286</b>
		<b>1870</b>				36	700	1870	1368	711	1,28	34,20	19,95	-	<b>1295</b>	-	<b>1489</b>

In conformity with EN442-1: 2014: radiators and convectors

For heat outputs in other regimes, see p. 320 (correction factors)  
EXPORT. Prices in Euro (excl. VAT)

**TUBES**

- Horizontal, rectangular 45 x 20 mm

**COLLECTORS**

- Vertical, rear, round Ø 35 mm

**COLOURS**

- Standard colour white RAL 9016
- Extensive colour chart see p. 10

**BRACKETS**

- Wall brackets in the colour RAL 9016 standard. Also in option available in the colour RAL 7016 (see p. 33).

**TECHNICAL**

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 4 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (available versions: see chapter electrical radiators, p. 42)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**

- See p. 41


**CONNECTION**

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 312)
- ✓ Two-point connection for two-pipe system (standard) (see p. 312)
- ✗ Integrated valve
- Connections: ½" (inner thread)
- For connection at the top a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 315.




**VASCO**

**RECOMMENDED CONNECTION (1188)**



Other connection methods, see p. 36



ref. nr. 1182 103 0000 0099  
**price € 218**  
 Fittings, see p. 327

**RECOMMENDED FOR BATHROOM AND KITCHEN IN OPTION**



towel rail straight (chrome)  
 ref. nr. see p. 34  
**price € 187**

Other accessories, see p. 34

**ZANA BATHROOM**

**Heat in its purest form**

The Zana Bathroom is a radiator concept that combines tradition and trends in an extremely pure design. A comfort solution that perfectly comes to its right in all respects thanks to the practical, integrated centre connection. The timeless, transparent structure and the refined design make the Zana Bathroom a desired object, also in smaller bathrooms.




# ZANA BATHROOM (ZBD)



ZBD

## HOW TO ORDER ZANA BATHROOM

Delivery time 15 - 30 working days  
(transport duration not included)

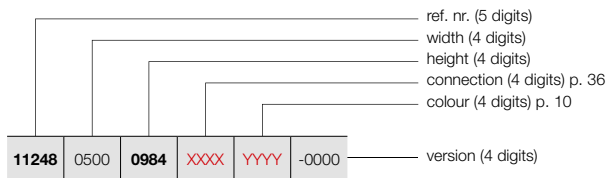

### PRICE GROUP: VPG1 - BATHROOM RADIATORS


REFERENCE CODE CUSTOM MADE ZANA BATHROOM							TECHNICAL DATA							STANDARD COLOUR	OTHER COLOURS	
tubes	width (L mm)	height (H mm)	75/65/20 (Watt (φ50K)	55/45/20 (Watt (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	price RAL 9016 (€)	price colour (€)						
<b>REF. NR. ZANA BATHROOM ZBD : 11248</b>																
<b>11248</b>	0500	<b>0984</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	21	500	984	658	360	1,18	19,35	8,80	500	<b>859</b>	<b>988</b>
		<b>1504</b>				32	500	1504	976	531	1,19	29,45	12,35	1000	<b>1254</b>	<b>1442</b>
		<b>1824</b>				40	500	1824	1189	647	1,19	35,67	14,53	1250	<b>1548</b>	<b>1780</b>
<b>11248</b>	0600	<b>0984</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	21	600	984	788	436	1,16	22,10	10,40	750	<b>902</b>	<b>1037</b>
		<b>1504</b>				32	600	1504	1151	633	1,17	33,70	15,80	1250	<b>1318</b>	<b>1516</b>
		<b>1824</b>				40	600	1824	1383	757	1,18	40,84	19,12	1500	<b>1637</b>	<b>1883</b>

In conformity with EN442-1: 2014: radiators and convectors

**For heat outputs in other regimes, see p. 320 (correction factors)**  
**EXPORT. Prices in Euro (excl. VAT)**

## BATHROOM RADIATORS BRACKETS / FREE-STANDING INSTALLATION IN OPTION

PRICE GROUP: VPG10 - ACC.









BRACKETS		COLOUR	REF. NR.	€
<b>CB / ZBD</b>				
WALL SETUP	4 brackets	RAL 7016	1187 007 0000 7016	<b>41</b>
FREE-STANDING INSTALLATION		COLOUR	REF. NR.	€
<b>HDM-A</b>				
MOUNTING SET		RAL 9016	11810410000	<b>86</b>
		COLOUR	11810410000C	<b>99</b>

EXPORT. Prices in Euro (excl. VAT)

# BATHROOM RADIATORS ACCESSORIES

IN OPTION

PRICE GROUP: VPG10B - TOWEL RAILS

ACCESSORIES		WIDTH TOWEL RAIL	COLOUR*	REF. NR.	€
			<b>O-NP</b>		
TOWEL RAIL MULTI+ RIGHT		600 mm	S600	1183 734 0000 0600	<b>204</b>
		600 mm	RAL 9005 <sup>S</sup>	1183 734 0000 9005	<b>204</b>
<ul style="list-style-type: none"> <li>h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;</li> <li>Mounting on the wall, to the right of the radiator.</li> </ul>					
			<b>O-NP</b>		
TOWEL RAIL MULTI+ LEFT		600 mm	S600	1183 735 0000 0600	<b>204</b>
		600 mm	RAL 9005 <sup>S</sup>	1183 735 0000 9005	<b>204</b>
<ul style="list-style-type: none"> <li>h = 70 mm; b = 600 mm (b tablet = 194 mm); e = 176 mm; c = 170 mm;</li> <li>Mounting on the wall, to the left of the radiator.</li> </ul>					
			<b>O-P / O-NP</b>		
TOWEL RAIL		372 mm	CHROME	1183 274 0000 0099	<b>160</b>
		372 mm	S600	1183 274 0000 0600	<b>160</b>
		372 mm	RAL 9005 <sup>M</sup>	1183 274 0000 9005	<b>160</b>
<ul style="list-style-type: none"> <li>h = 55 mm; b = 372 mm; d = 56 mm; a = 50 mm;</li> </ul>					
			<b>HDM-A / HDRM-A / HRM-A</b>		
FOLDING DRYING AND STACKING RACK			CHROME	1183 002 0000 0099	<b>135</b>
<ul style="list-style-type: none"> <li>Standard included with Iris-A, Agave-A.</li> <li>380 x 158 mm</li> </ul>					
			<b>CB</b>		
SQUARE HOOK			CHROME	1183 500 0000 0099	<b>68</b>
<ul style="list-style-type: none"> <li>h = 24 mm; b = 24 mm; d = 65 mm</li> </ul>					
			<b>CB</b>		
TOWEL RAIL STRAIGHT			CHROME	1183 207 0000 0099	<b>187</b>
<ul style="list-style-type: none"> <li>h = 24 mm; b = 720 mm (easy adjustable); d = 66 mm; a = 48 mm</li> </ul>					
			<b>AB / ZBD</b>		
HOOK			CHROME	1183 410 0000 0099	<b>87</b>
<ul style="list-style-type: none"> <li>h = 70 mm; b = 70 mm; d = 59 mm; a = 51 mm;</li> </ul>					
			<b>ZBD</b>		
TOWEL RAIL STRAIGHT			CHROME	1183 228 0000 0099	<b>187</b>
<ul style="list-style-type: none"> <li>h = 22 mm; b = 720 mm (easy adjustable); d = 75 mm; a = 56 mm</li> </ul>					

<sup>S</sup> structure black

<sup>M</sup> matt black



\* Multi+ is available in the colour of the radiator, if ordered together. Extra charge +15%.

Mounting instructions accessories: see [www.vasco.eu](http://www.vasco.eu)  
EXPORT. Prices in Euro (excl. VAT)

e = distance front of the accessory up to the wall  
d = distance front of the accessory up to front of the radiator  
c = distance between wall to back towel bar  
a = distance accessory up to the radiator  
**available from stock**

**BATHROOM RADIATORS** ACCESSORIES  
IN OPTION

PRICE GROUP: VPG10 - ACC.


ACCESSORIES		COLOUR	REF. NR.	€
THERMOSTATIC HEAD		<b>BMmm / BMRmm</b>		
		WHITE	11911630102	<b>44</b>
THERMOSTATIC HEAD		<b>BMmm / BMRmm</b>		
		CHROME	11911631102	<b>63</b>

Mounting instructions accessories: see [www.vasco.eu](http://www.vasco.eu)  
EXPORT. Prices in Euro (excl. VAT)




# BATHROOM RADIATORS CONNECTIONS

## ONI: O-P / O-NP




IRIS-A: HDM-A / HDRM-A / HDM-BL-MIX-A  
 AGAVE-A: HRM-A  
 ASTER-A: HF-A / HF-BL-MIX-A

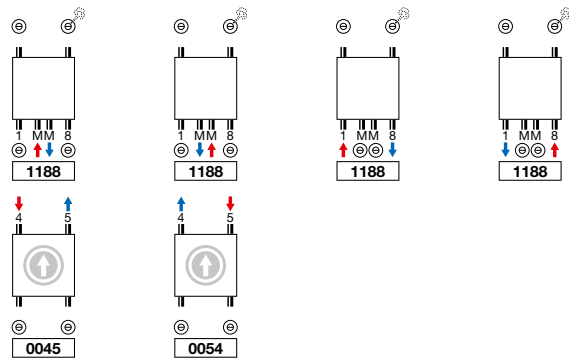


ⓘ Connection from above must be ordered as a separate radiator (radiator height = height + 9 mm)


## BANO: BM / BMR

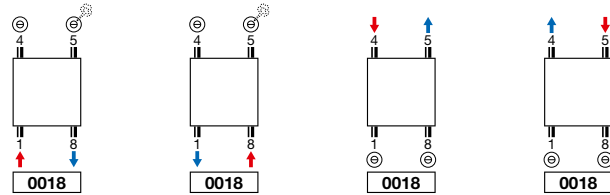


## BANO with central connection: BMmm / BMRmm

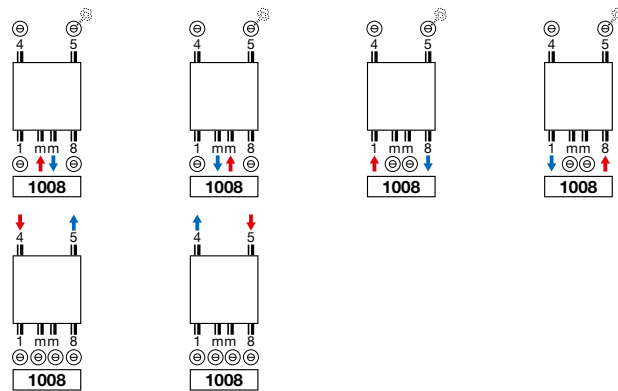


## CARRÉ BATHROOM: CB (STOCK) / CB (NON STOCK)

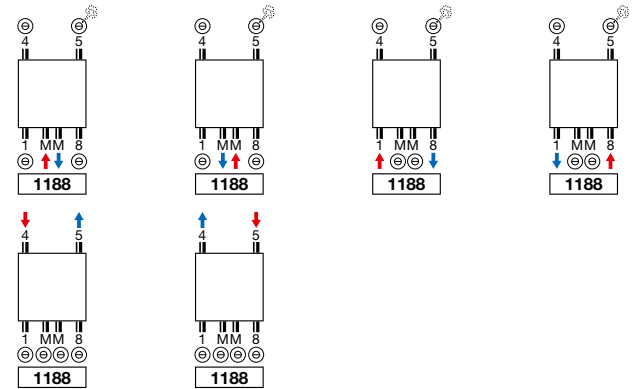


## CARRÉ BATHROOM: CB (NON STOCK)

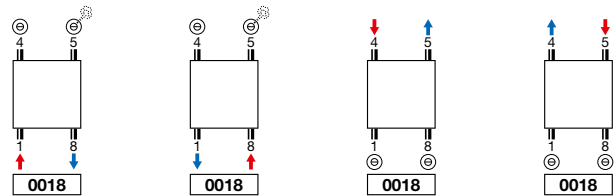

## ARCHE BATHROOM: AB

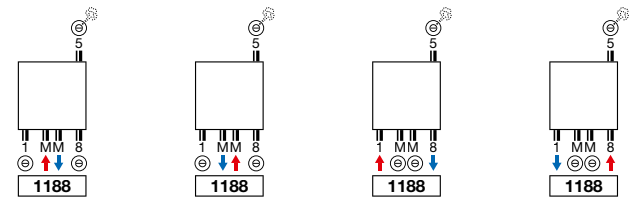


## ZANA BATHROOM: ZBD

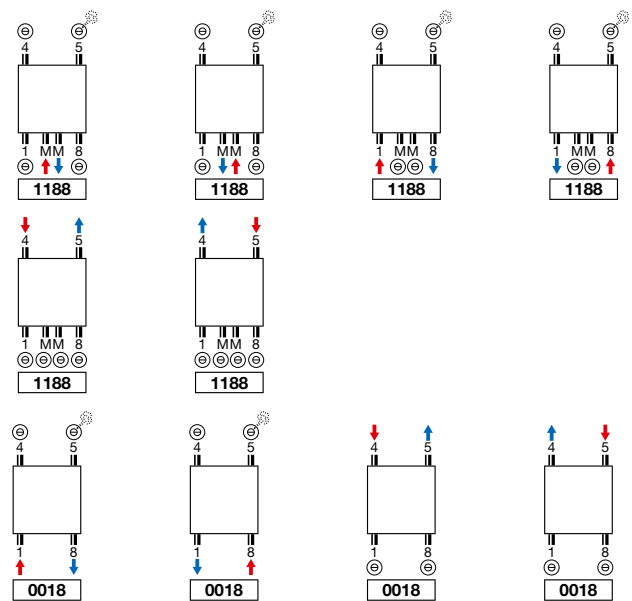

**Attention:** connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.




ONI (O-P)

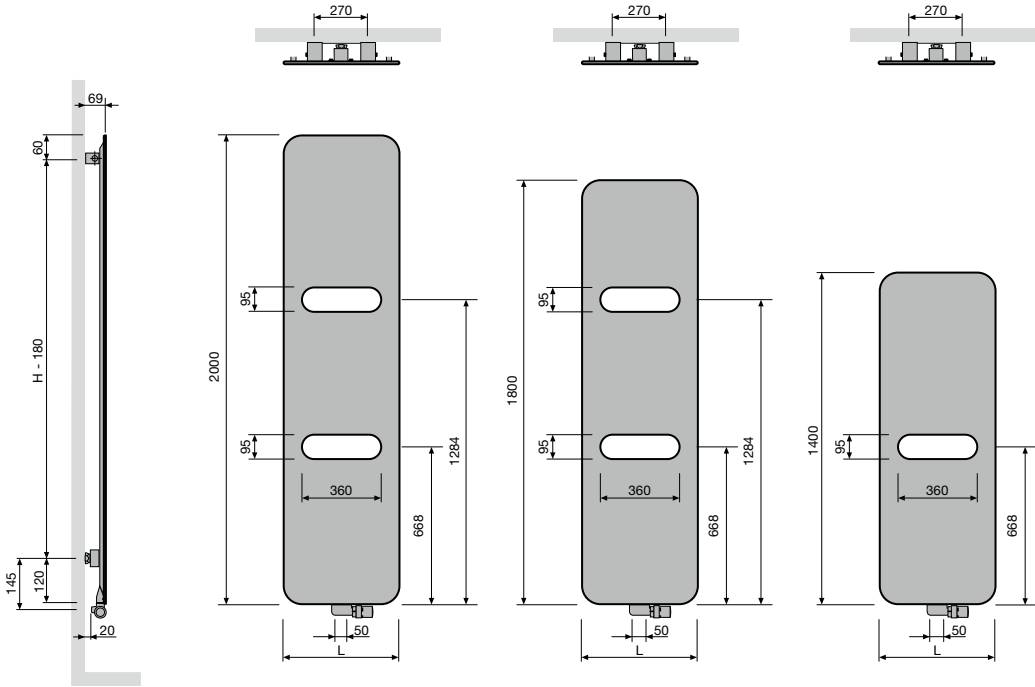


O-P	50
Centre between the connections	50
Centre between the brackets	L-270

ONI (O-NP)

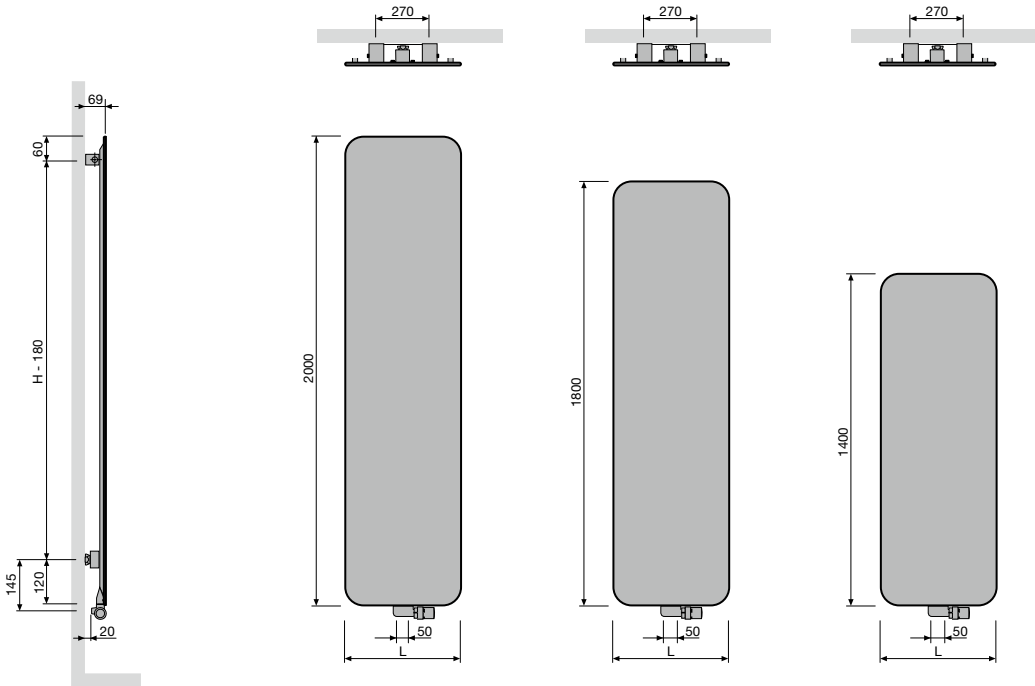

O-NP	50
Centre between the connections	50
Centre between the brackets	L-270

**IRIS-A (HDM-A, HDRM-A)**

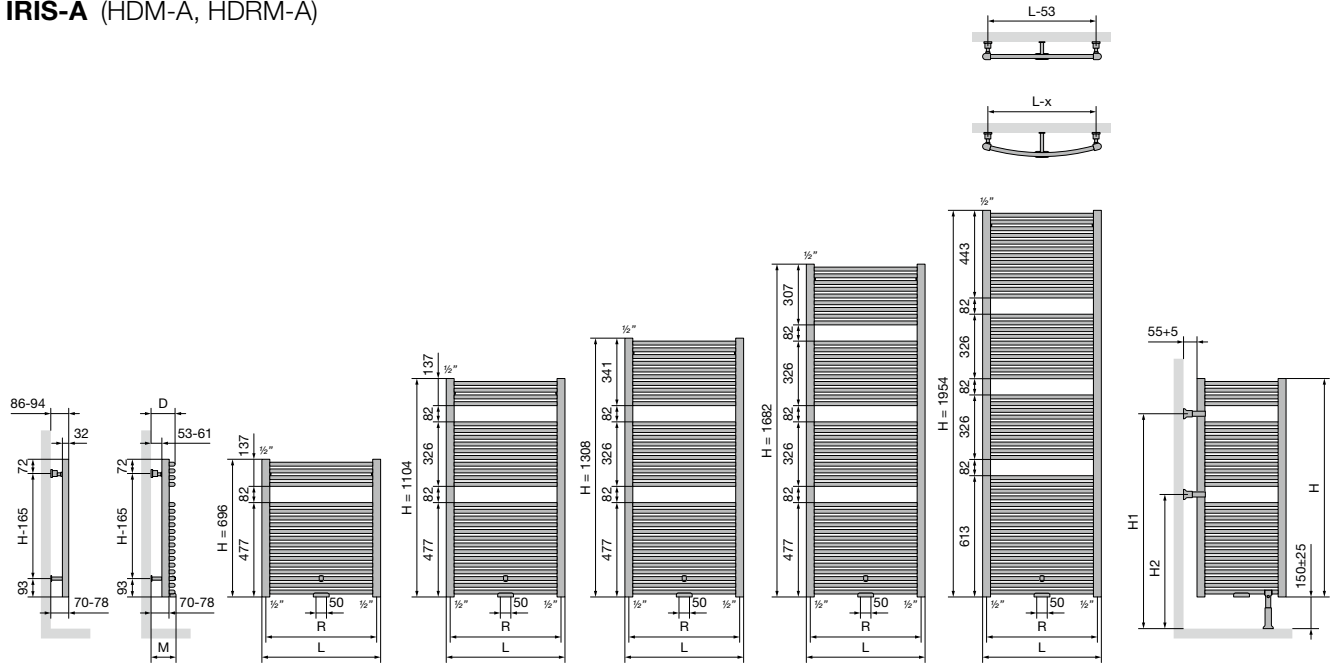


	<b>HDM-A</b>				
Width (L)	450	500	600	750	900
Centre between the connections at the bottom (R)	410	460	560	710	860
Centre between the brackets	L-53	H-165			

	<b>FREE-STANDING HDM-A</b>				
Height (H)	696	1104	1308	1682	1954
H1	668	1076	1076	1484	1620
H2	396	668	668	668	804

	<b>HDRM-A</b>				
Width (L)	447	498	598	747	897
Centre between the connections at the bottom (R)	407	458	558	707	857
Distance between wall and middle of MM valve (M)	92-100	91-99	94-102	100-108	107-115
Distance between wall and front of the radiator (D)	102-110	101-109	104-112	110-118	117-125
Centre horizontal between the brackets	400	452	552	702	852
Centre vertical between the brackets	H-165				


**AGAVE-A (HRM-A)**

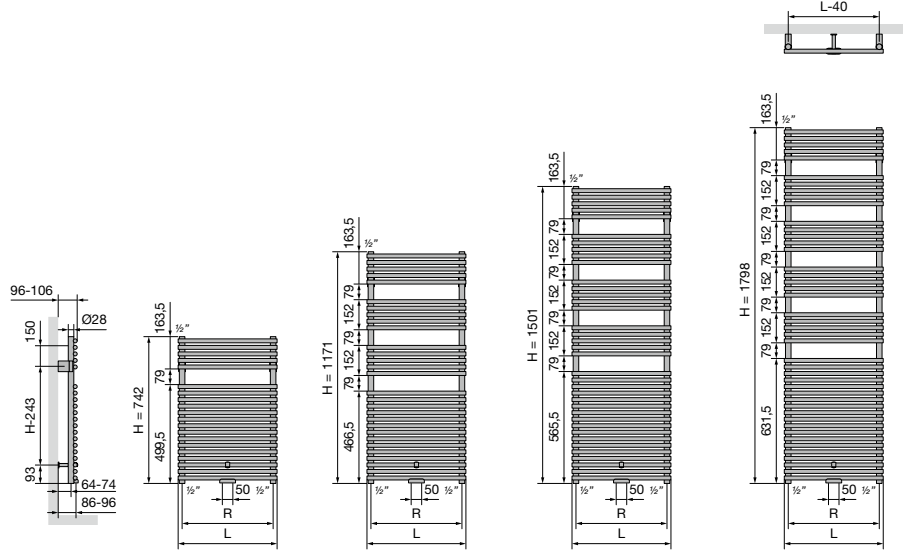

	<b>HRM-A</b>			
Width (L)	500	600	750	900
Centre between the connections at the bottom (R)	460	560	710	860
Centre between the brackets	L-40	H-243		




**ASTER-A (HF-A)**

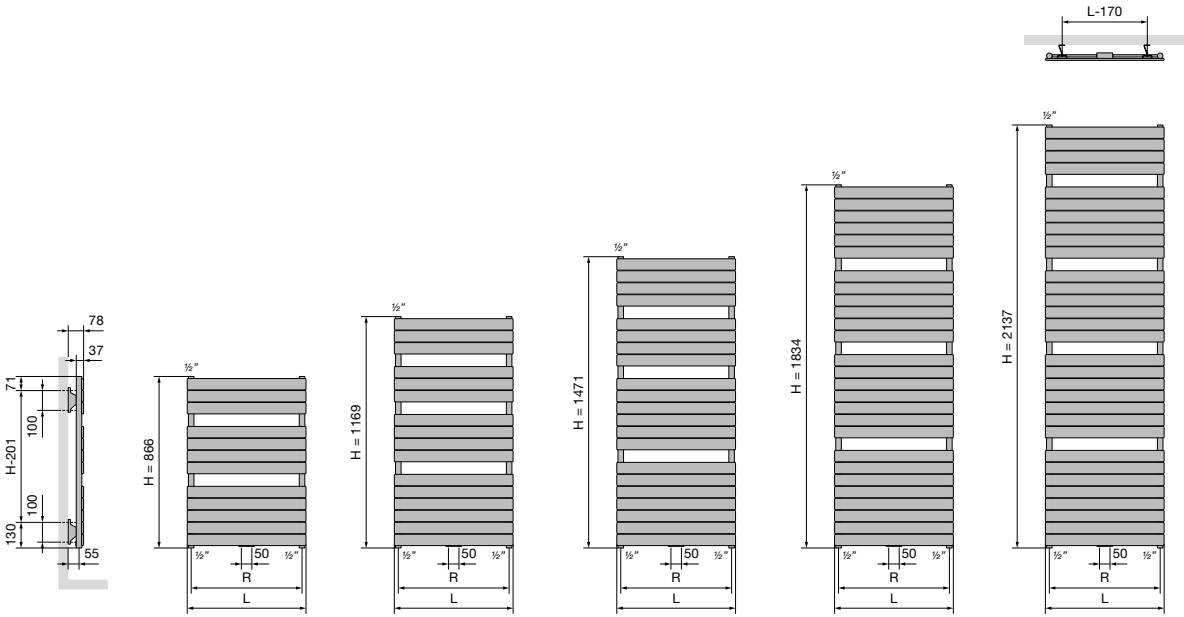


		<b>HF-A</b>			
	Width (L)	450	600	700	800
	Centre between the connections at the bottom 18 (R)	410	560	660	760
	Centre between the brackets	L-170	H-201		

**BANO (BM, BMR)**

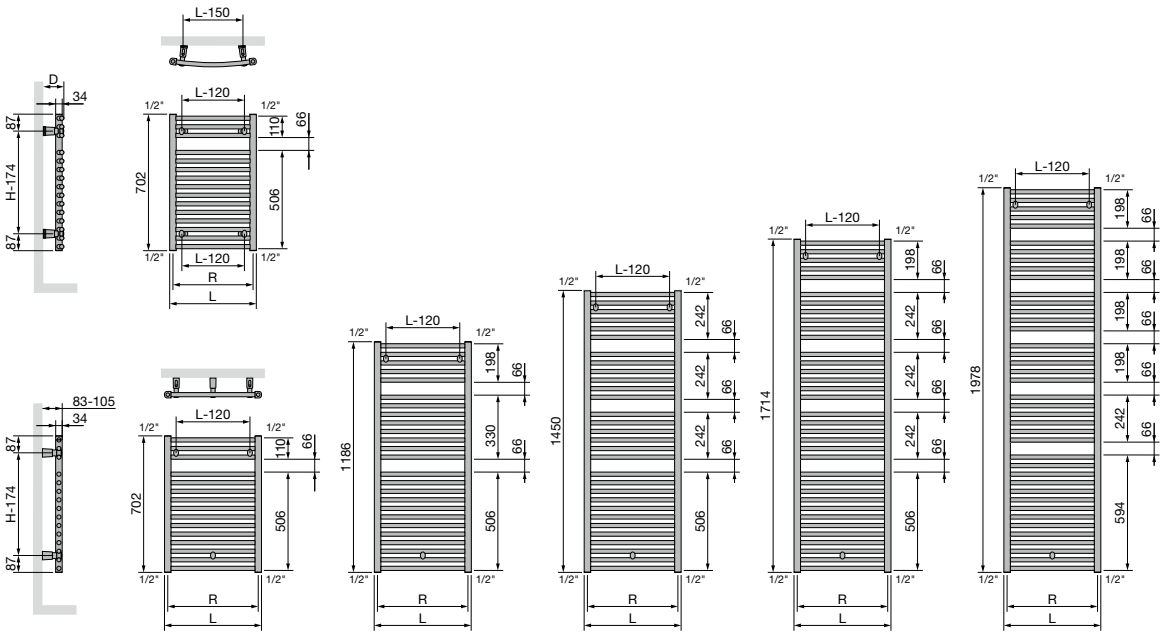

		<b>BM</b>				<b>BMR</b>				
	Width (L)	450	500	600	750	Width (L)	446	495	595	744
	Centre between the connections at the bottom 18 (R)	416	466	566	716	Centre between the connections at the bottom 18 (R)	412	461	561	710
	Centre between the brackets	L-120	H-174			Distance between wall and front of the radiator (D)	88-108	89-109	95-115	105-125
						Centre between the brackets	L-150	H-174		

**BANO with central connection (BMmm, BMRmm)**

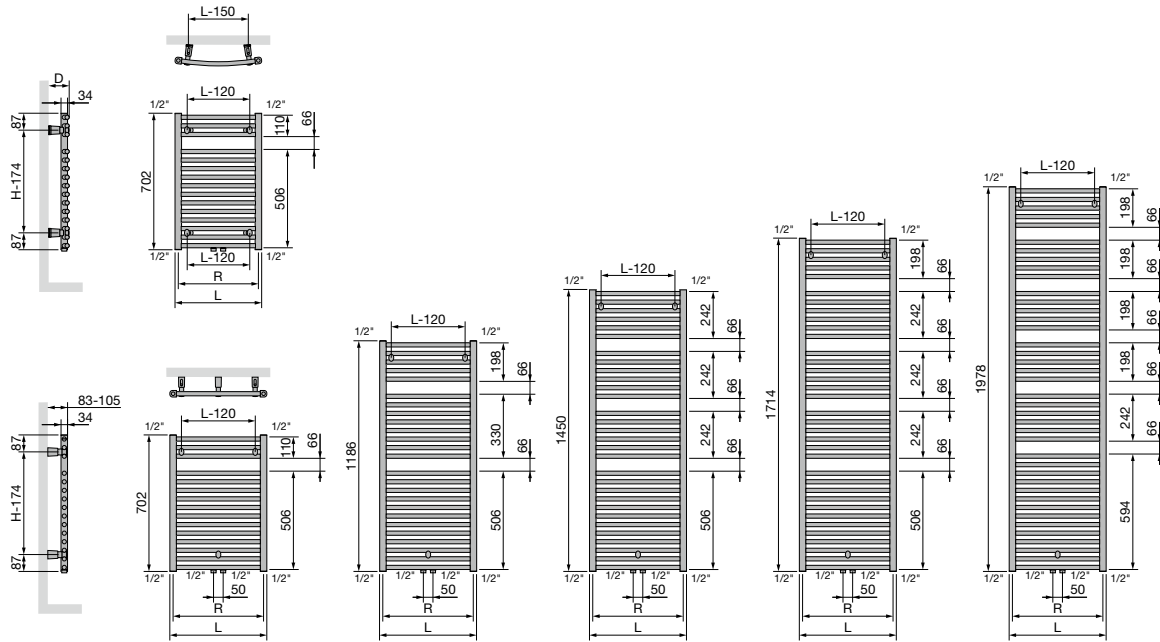


	<b>BMmm</b>				
Width (L)	450	500	600	750	
Centre between the connections at the bottom 18 (R)	416	466	566	716	
Centre between the brackets	L-120	H-174			

	<b>BMRmm</b>				
Width (L)	446	495	595	744	
Centre between the connections at the bottom 18 (R)	412	461	561	710	
Distance between wall and front of the radiator (D)	88-108	89-109	95-115	105-125	
Centre between the brackets	L-150	H-174			


**CARRÉ BATHROOM (CB)**

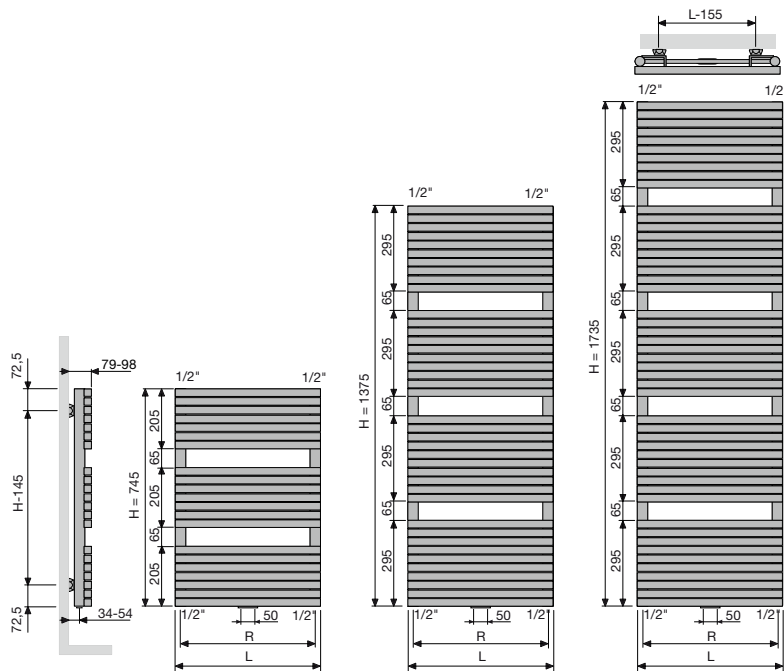

	<b>CB</b>	
Width (L)	500	600
Centre between the connections at the bottom 18 (R)	465	565
Centre between the brackets	L-155	H-145




**ARCHE BATHROOM (AB)**

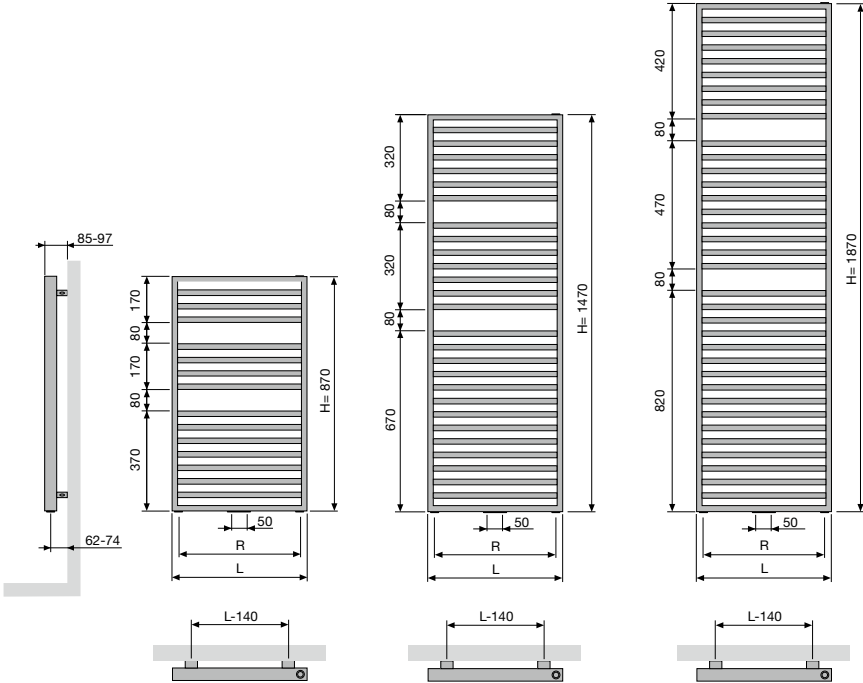

	<b>AB</b>		
Width (L)	500	600	700
Centre between the connections at the bottom (R)	400	500	600
Centre between the brackets	L-140	H-120	

**ZANA BATHROOM (ZBD)**

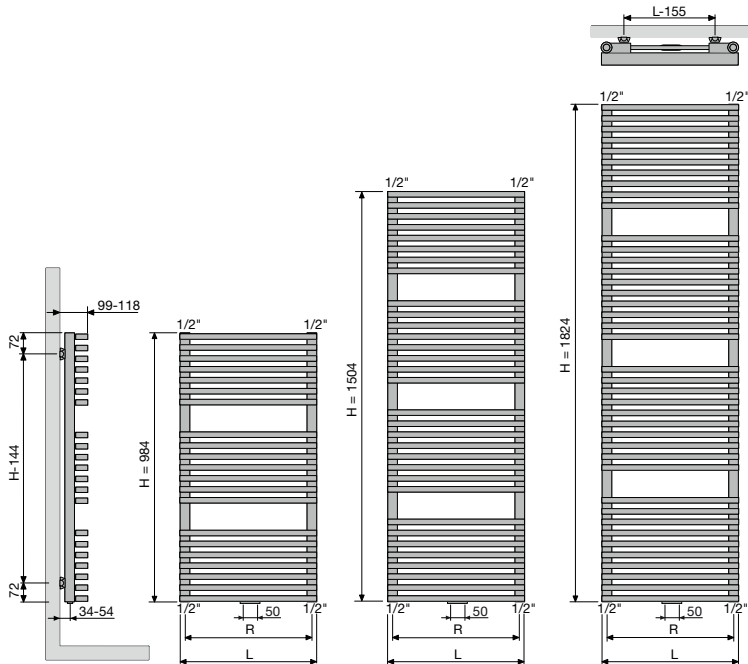

	<b>ZBD</b>	
Width (L)	500	600
Centre between the connections at the bottom (R)	465	565
Centre between the brackets	L-155	H-144