

ALUMINIUM ROOF FEED-THROUGH

DESCRIPTION

The Vasco insulated air ducts and accessories, together with the other Vasco ventilation products, assure a unique low-noise ventilation system. The insulated parts were developed to meet the ever more stringent requirements for thermal insulation and noise level in living spaces that are set for air-technical installations with heat recovery. These insulated parts must be applied to the outdoor connection of the ventilation system.

The Vasco aluminium roof feed-through can be used for all outdoor connections with inner diameter Ø 125, 170 and 200mm. This both on a flat roof and on a pitched roof with a slope between 18° and 52°.



ACCESSORIES




Mounting bracket



Adhesive plate



Roof tile




Counter flashing

GRAPH

PRESSURE LOSSES THROUGH ALUMINIUM ROOF FEED-THROUGH


Supply

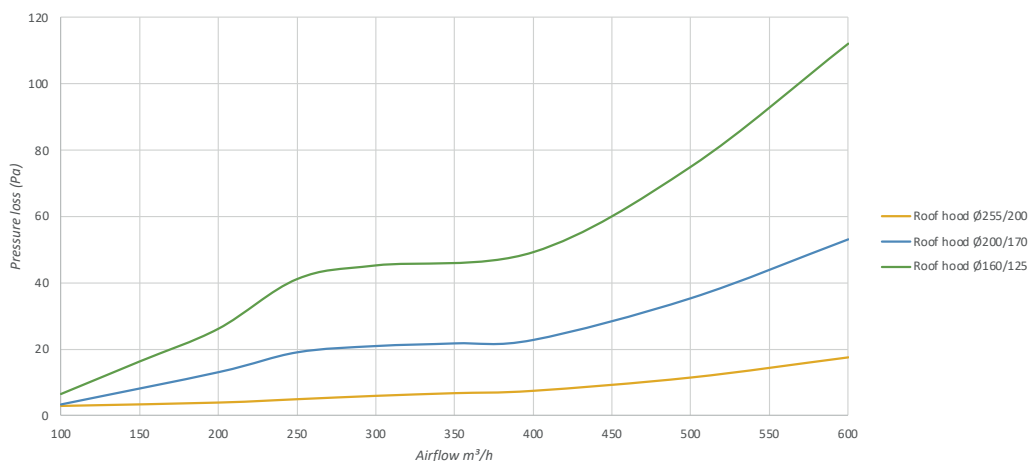




ALUMINIUM ROOF FEED-THROUGH

Exhaust

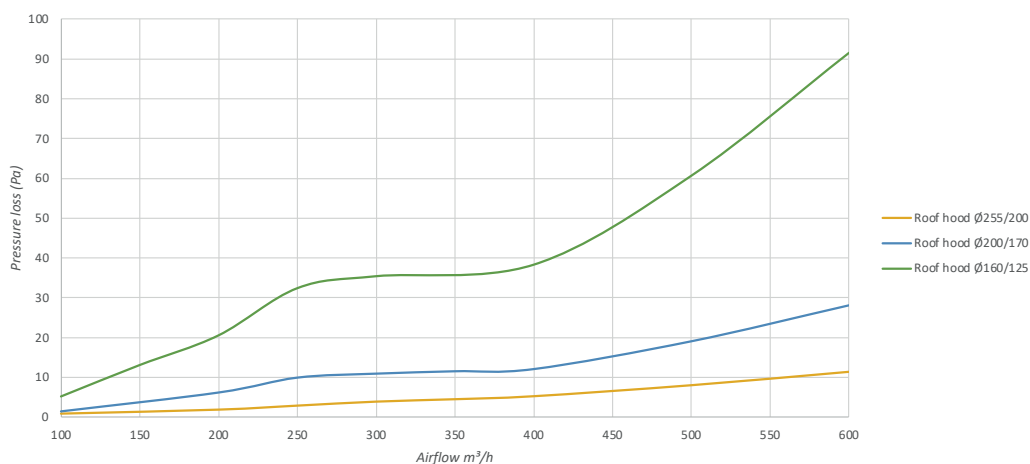


DIMENSIONAL DRAWING


Roof feed-through 160/125 mm

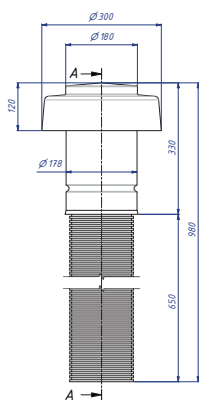


A-A (1/5)




Roof feed-through 200/170 mm

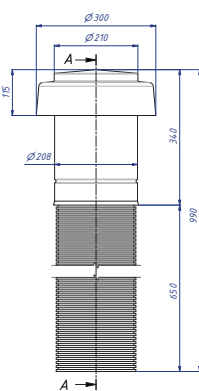

A-A (1/5)



Roof feed-through 255/200 mm

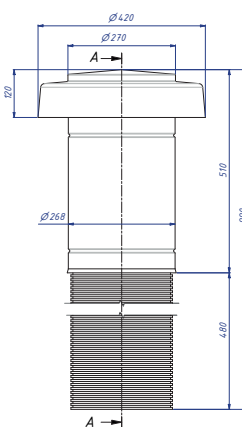

A-A (1/5)

