




ALUMINIUM FACADE FEED-THROUGH

DESCRIPTION

The Vasco insulated air ducts and accessories, together with the other Vasco ventilation products, assure a unique low-noise ventilation system. The insulated parts were developed to meet the ever more stringent requirements for thermal insulation and noise level in living spaces that are set for air-technical installations with heat recovery. These insulated parts must be applied to the outdoor connection of the ventilation system.


The Vasco facade feed-through is available in white (RAL 9016) and black (RAL 9005) and can be used for all outdoor connections with inner diameter Ø 125, 170 and 200mm.

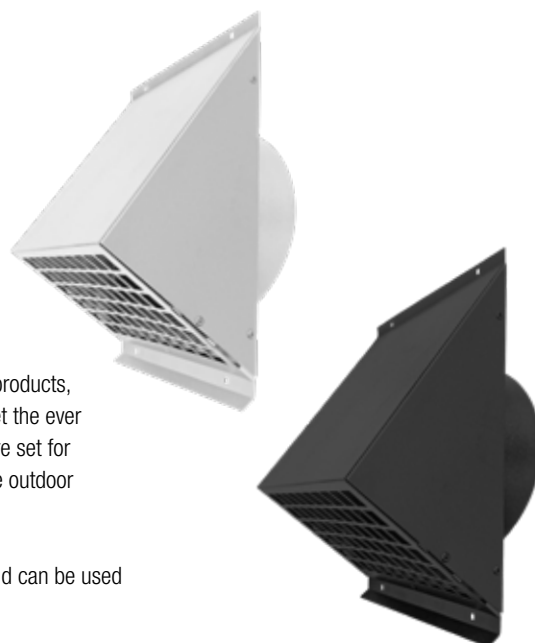


GRAPH

PRESSURE LOSSES THROUGH ALUMINIUM FACADE FEED-THROUGH

Supply

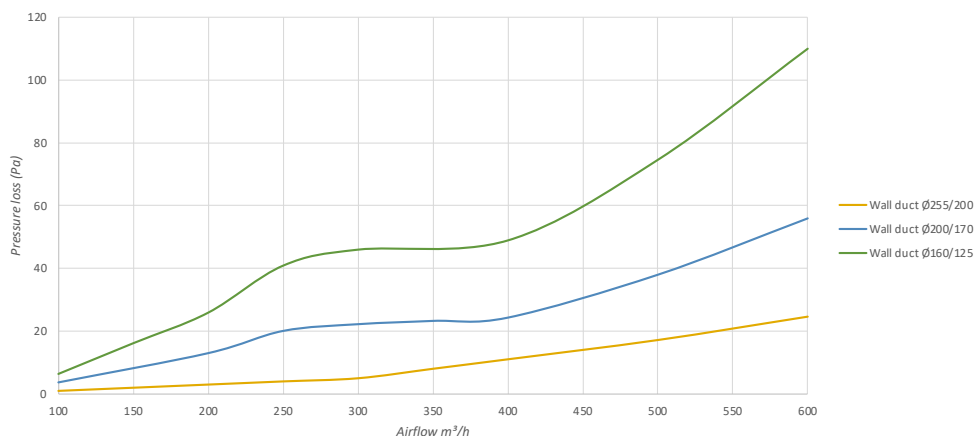

Exhaust


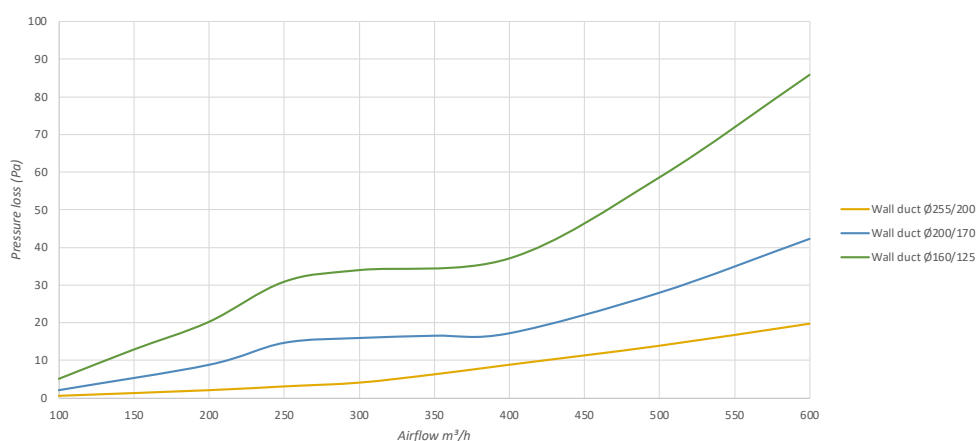






ALUMINIUM FACADE FEED-THROUGH

DIMENSIONAL DRAWING



Facade feed-through 160/125 mm

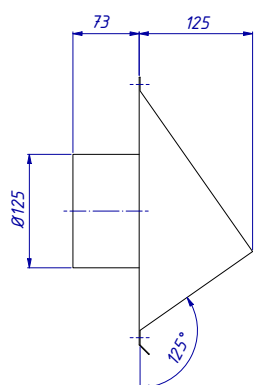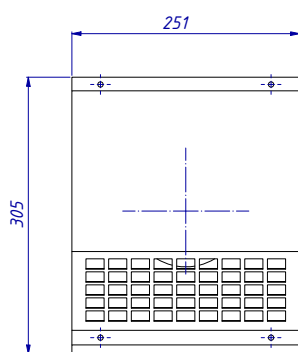

Facade feed-through 200/170 mm

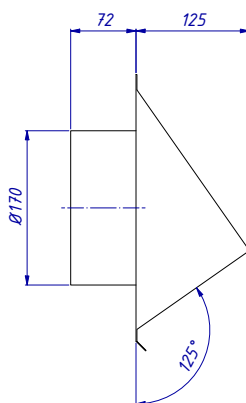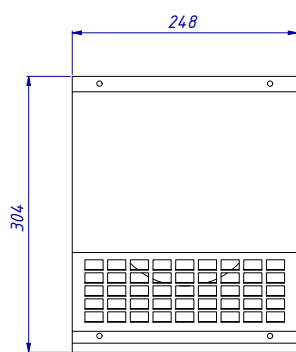

Facade feed-through 255/200 mm

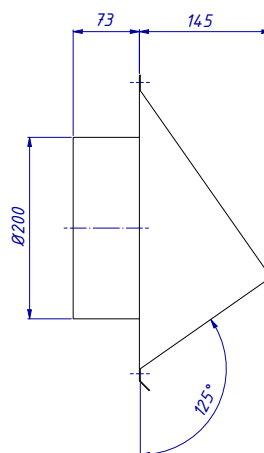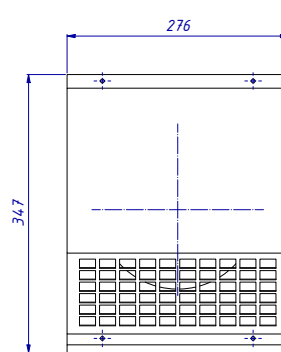

Dimensions in mm