




FILTER SETS D275

DESCRIPTION

Vasco recommends cleaning the filters in your ventilation unit 3-monthly and 6-monthly replacement. Cleaning can be done with a vacuum cleaner. Replacement is easily indicated by the dirt filter indicator on the supplied control element: after operation, the LED lights up orange 2x:



Replace the filters (supply and return air) with official filter sets for Vasco ventilation units type D. Available from wholesalers or the Vasco "Accessory Shop". Then reset the dirt filter message by pressing for at least 4 seconds simultaneously the "position 1" and "timer" buttons until the LED lights up green.

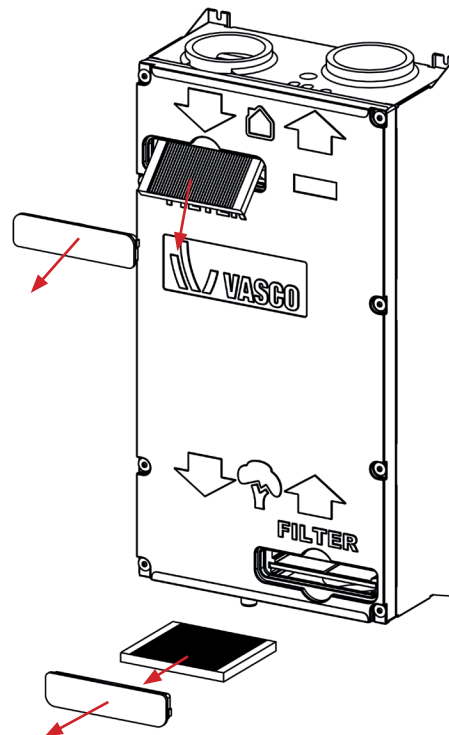

TECHNICAL FEATURES

On ventilation units of type D275, the filters are accessible from the front of the unit. 2 separate filter caps must be opened to gain access to the supply and return filters respectively.

* Depending on the quality of the outside air, there is sometimes a need to replace the F7 filter more often, hence a filter replacement set with 2x F7 filters.

Type ventilation unit	Dimensions (lxwxh mm)	Filter classification EN779 - ISO16890	Material	Image filter set
D275, D275EP, D275 II, D275EP II	252x213x10	G4 - ISO Coarse 60% G4 - ISO Coarse 60%	Synthetic Filter frame made of cardboard	
D275 III, D275EP III	216x245x20 200x245x20	F7 - ISO ePM1 55% G4 - ISO Coarse 65%	Fibreglass paper Filter frame made of cardboard	
D275 III, D275EP III	216x245x20	F7 - ISO ePM1 55% F7 - ISO ePM1 55%	Fibreglass paper Filter frame made of cardboard	*