

Filter sets D275

Description

The Vasco D275 comes fitted as standard with 1x ISO ePM1 55% (=F7) and 1x ISO Coarse 65% (=G4) filters. Vasco recommends cleaning the filters in your ventilation unit every 3 months and replacing them every 6 months. Cleaning can be done with a vacuum cleaner. The need for replacement is clearly indicated by the dirt filter indicator on the supplied switch.


Dirt filter indication + reset

After operation, the LED lights up orange 2x:



Replace the filters (supply and extract air) with official filter sets for Vasco type D ventilation units. These are available from wholesalers or the Vasco "Accessory Shop".

Then reset the dirty filter warning by pressing the "speed 1" and "timer" buttons simultaneously for at least 4 seconds, until the LED lights up green.

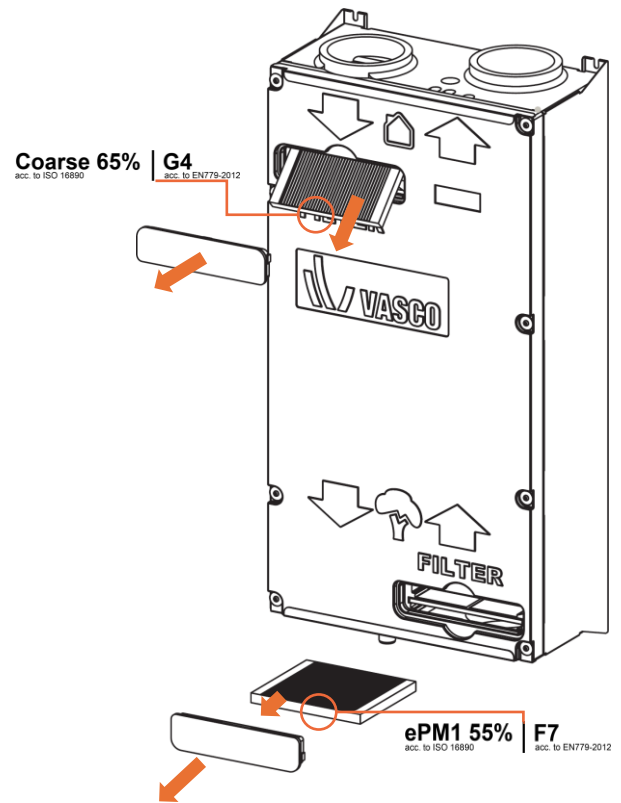

Technical specification

On the D275 ventilation unit, the filters are accessible from the front of the unit. Two separate filter covers must be opened to access the supply and exhaust filters respectively.

Depending on the quality of the outside air, it may be necessary to replace the F7 filter more frequently.

That is why we also offer a filter replacement set containing 2x F7 filters.

Type ventilation unit	D275 D275EP D275 II D275EP II	D275 III D275EP III	D275 III D275EP III
Dimensions filters (l x w x h mm)	252 x 213 x 10	216 x 245 x 20 200 x 245 x 20	216 x 245 x 20
Filter ratings EN779 - ISO 16890	G4 - ISO Coarse 60 % G4 - ISO Coarse 60 %	F7 - ISO ePM1 55 % G4 - ISO Coarse 65 %	F7 - Iso ePM1 55% F7 - Iso ePM1 55%
Material	Synthetic Cardboard filter frame	Glass fibre paper Cardboard filter frame	
Filter sets			